

G2L5202PTAA

PS/2 KVM Cable 6 Ft




This TAA compliant cable set connects your PS/2 computers to your GCS1808 or GCS1716 KVM switch, determining the quality of communication between the CPUs and the switch. Our custom-made cables are designed to provide the highest signal capacity with the lowest signal loss. This important technology produces the highest quality video output - even after long distance transmission or in the most electronically noisy environments such as server cabinets. IOGEAR's premium custom-made KVM cables guarantee optimum signal integrity for high-grade server needs. The keyboard and mouse cables are made of double-sealed 22-gauge wire and are neatly wrapped with a heavy-duty video cable for simplified connections.

- 6ft bonded KVM cable with PS/2 and VGA connections
- Connects your PS/2 computers to your GCS1716 KVM switch
- Custom made cables maintain the signal's optimal integrity and quality
- Convenient and functional cable design with double-shielded 22 gauge for keyboard, mouse and a UL-2919 video cable
- TAA Compliant



How does it work?

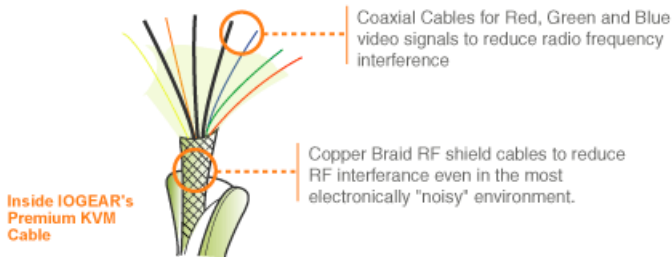

Requirements

- A GCS1716 KVM Switch
- Computers with PS/2 and VGA connections

Package Contents

- 1 x 6ft PS/2 KVM Cable

Specifications

| Function | G2L5202PTAA | Dimensions | G2L5202PTAA |
|-----------------------------|---------------------|--------------------------------|-------------|
| KVM Side Connections | | Unit Dimensions | |
| Keyboard, Video, Mouse | 15 pin HDB Male | Length | 6ft |
| CPU Connectors | | Unit Package Dimensions | |
| Mouse | 6 pin mini-DIN Male | Width | 8.125in. |
| Keyboard | 6 pin mini-DIN Male | Height | 9.25in. |
| Monitor | 15 pin HDB Male | Depth | 1in. |
| | | Master Carton | |
| | | Width | 11.25in. |
| | | Height | 10in. |
| | | Depth | 12in. |
| | | Master Carton Qty. | 24 |
| | | Weight | |
| | | Master Carton Wt. | 13.1lb |
| | | Unit Pack Wt. | 0.5lb |
| | | Unit Wt. | 0.5lb |