

G2LU3AMB6

USB 3.0 Type A to Micro B Cable - 6ft (1.8m)



USB 3.0 Type A to Micro B Cable

IOGEAR's USB 3.0 Type A to Micro B cable is the perfect solution for your USB 3.0 devices' charging and data transfer needs. It allows data transfer rate of up to 5Gbps, provides high quality performance, and supports high speed applications. The USB 3.0 Type A to Micro B cable connects your USB 3.0 device up to 6.5ft away, without the need to install drivers or connect to an external power supply. Backwards compatible with USB 2.0 and USB 1.1 devices, this cable is the perfect solution for charge and sync hubs, card readers, smartphones, USB 3.0 hard drives, printers, and other Micro USB peripherals.


IOGEAR's USB 3.0 Type A to Micro B cables are designed to connect from a USB port on your Hub, PC or Mac to your USB device. Foil and braid shielding reduces EMI/RFI interference and our twisted-pair construction helps reduce crosstalk to ensure high-speed, error-free data transfer. This cable features the latest design and technology and is backed by IOGEAR's Limited Lifetime Warranty.

Charge & Sync for Samsung Galaxy Note 4 and Galaxy S5

The USB 3.0 Type A to Micro B Cable - 6ft (1.8m) serves as an upgrade or replacement of the factory supplied cable included with new Samsung devices such as Galaxy Note 4 and Galaxy S5. It's also an extended version of the cable supplied [IOGEAR 6-Port Super-Speed USB 3.0 Hub](#) and the [SuperSpeed USB 3.0 Multi-Card Reader/Writer](#).

- Connect a USB 3.0 device up to 6ft away
- Perfect for external hard drives and new smartphones such as Samsung Galaxy S5
- USB 3.0 transfer rates of up to 5Gbps
- Up to 10x faster than USB 2.0
- Perfect for devices such as charge & sync hub, card readers, printers and other Micro USB peripherals
- Compatible with PC and Mac



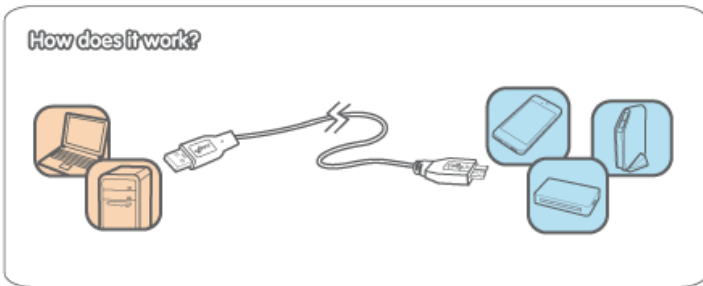

Requirements

Package Contents

- **Hardware:**
 - USB 3.0 Type A port
 - USB 3.0 Type A device
 - USB 3.0 Micro Type B port
 - USB 3.0 Micro Type B device
- **Operating System:**
 - Windows Vista®, Windows® 7, Windows® 8, Windows® 8.1
 - Mac OS X +

- 1 x G2LU3AMB6

Specifications

Function	G2LU3AMB6	Dimensions	G2LU3AMB6
Cable Length	6ft (1.8m)	POP Information	
Cable Type	Copper conductor, Blue PVC jacket, 28 AWG, OD: 5.5mm	10" Peg Hook	14
Connectors		6" Peg Hook	8
Cable	Nickel-plated	Unit Dimensions	
Operating Temperature	20 - 50 degrees (Celsius)	Height	0.63" (1.59cm)
Storage Temperature	0 - 70 degrees (Celsius)	Depth	0.25" (0.63cm)
Operating System Support	Windows Vista®, Windows® 7, Windows® 8, Windows® 8.1, Mac OS X+	Length	6.63ft (201.93cm)
USB Specification	USB 3.0 compliant	Unit Package Dimensions	
Transfer Rate	Up to 5Gbps	Width	6.69" (16.99cm)
Humidity	20 - 80% RH, (Non-condensing)	Height	9.38" (23.83cm)
Cable Connections		Depth	0.75" (19.05cm)
Input	USB 3.0 Type A	Master Carton	
Output	USB 3.0 Type Micro B	Width	19.38" (49.23cm)
		Height	7.75" (19.69cm)
		Depth	11.75" (29.84cm)
		Master Carton Qty.	48
		Weight	
		Master Carton Wt.	11.85lb (5.39kg)
		Unit Pack Wt.	0.22lb (0.099kg)
		Unit Wt.	0.19lb (0.086kg)