

G2LU3CDP12

USB-C to DisplayPort 4K Cable, 6.6 Ft (2m)



- Easily connects a USB-C/Thunderbolt 3 laptop/tablet* to a 4K DisplayPort display
- Enjoy brilliant 4K Ultra HD video at resolution up to 3840 x 2160 @60Hz
- Supports Dolby True-HD and DTS HD lossless multi-channel audio
- High speed data rates up to 5.4Gbps
- A single cable solution - no additional cables needed

Connect a USB-C Laptop or Tablet to a DisplayPort Display

The USB-C to DisplayPort 4K Cable easily connects your USB-C laptop or tablet to a DisplayPort display or projector. This single cable solution is all that is needed to expand your workspace visibility or to enjoy 4K video or photos and high-quality audio on your 4K Ultra HD display. Compatible with both Mac and PCs, and the newest iPad Pro1, the IOGEAR USB-C to DisplayPort 4K Cable is as flexible as it is robust.


Ultra HD Video

Appreciate brilliant 4K Ultra HD video content on a larger DisplayPort screen for a true home theater experience. The USB-C to DisplayPort 4K Cable provides video resolutions up to 3840 x 2160 @60Hz with support for the latest High Dynamic Range (HDR) video content, ensuring crisp, vivid picture quality.

- Easily connects a USB-C/Thunderbolt 3 laptop/tablet¹ to a 4K DisplayPort display
- Enjoy brilliant 4K Ultra HD video at resolution up to 3840 x 2160 @60Hz
- Supports Dolby True-HD and DTS HD lossless multi-channel audio
- High speed data rates up to 5.4Gbps
- A single cable solution - no additional cables needed
- Supports High Dynamic Range (HDR) video content
- Works with the newest USB-C iPad Pro in mirror-mode

¹Laptops and tablets with USB-C DP Alt Mode supported



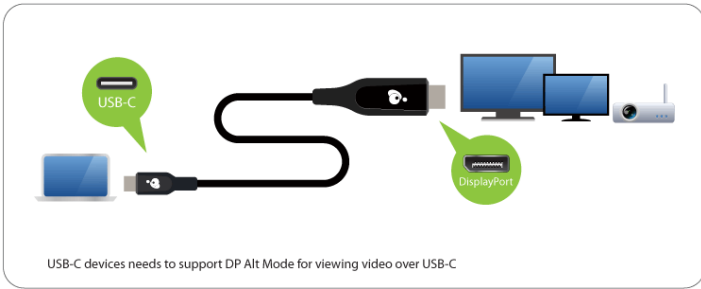

Requirements

Package Contents

- USB-C (Thunderbolt 3 compatible) device with DP Alt Mode support
 - DisplayPort enabled Display / Monitor
- 1 x G2LU3CDP12
 - 1 x Warranty Card

Specifications

Function	G2LU3CDP12	Dimensions	G2LU3CDP12
Cable Length	6.6ft (2m)	Unit Dimensions	
Connectors (Input)	USB-C Male	Length	6.6ft (2m)
Connectors		Inner Pack	
Video Output	DisplayPort 1.2 Male	Width	4.80" (12.2cm)
Video Resolution	Up to 4Kx2K @ 60Hz	Height	6.1" (15.5cm)
Data Rate	Supports per lane data rates of 5.4Gbps (HBR2), 2.7Gbps (HBR) and 1.62Gbps (RBR)	Length	7.48" (19cm)
Environment		Inner Pack Qty.	6
Humidity	10% to 85 % RH (no condensation)	Unit Package Dimensions	
Operation Temperature	32 degree Fahrenheit to 113 degree Fahrenheit	Width	1.18" (3cm)
Storage Temperature	14 degree Fahrenheit to 158 degree Fahrenheit	Height	5.71" (14.5cm)
Operating System Requirements		Length	4.33" (11cm)
Mac	Mac OS X 10.7+	Master Carton	
Windows	Windows 7 / 8 / 8.1 / 10	Width	15.75" (40cm)
		Height	6.89" (17.5cm)
		Depth	10.24" (26cm)
		Master Carton Qty.	24
		Weight	
		Master Carton Wt.	8.1lb (3.7kg)
		Inner Pack Wt.	1.76lb (0.8kg)
		Unit Pack Wt.	0.25lb (0.11kg)
		Unit Wt.	0.15lb (0.068kg)