

G2LU4CCM01

USB4 C to C cable (40Gbps) 0.8 m [USB-IF]

- Display Resolution Up to 8K@30hz
- Bandwidth up to 40Gbps
- PD 3.0 up to 100W
- Support USB, DisplayPort, and PCI express protocols
- Backwards compatible with USB3.2, USB2.0 and Thunderbolt™3



USB4: Premium Performance for Pros

Get the maximum performance and deliver the fastest, most versatile connection to any dock, display or data device with the premium quality of the USB4 40Gbps cable from IOGEAR. Optimized to provide twice the video bandwidth, power delivery and four times the data transfer, this cable guarantees that you get the most out of your USB-C devices.

Thunderbolt™ 3, USB-C 3.2 and USB-C 3.1 Compatible


Based on the USB-C cable architecture, this reversible USB4 cable is also backwards compatible with all Thunderbolt 3, USB-C 3.2 and USB-C 3.1 devices. When connected to USB-C devices, this cable is capable of transferring data of up to 10Gbps while charging a laptop up to 100W (5V, 20A). Supporting both USB-C and Thunderbolt 3, this cable is the most capable USB-C cable. The only cable you will need for all your modern computing needs.

Single Cable Operation

A single USB4 cable utilizes the latest USB-C technology enabling the transmission of audio, video, data and power delivery simultaneously. With the maximum bandwidth of up to 40Gbps and power delivery of up to 100W, this USB-C cable is ready for the most demanding computer tasks or challenges that you may have. Ideal for connecting your USB-C docking station to your other USB-C or Thunderbolt 3 devices, the IOGEAR USB4 cable also provides the capability to support single 8K @30Hz or dual 4K @60Hz video resolution.

- Display Resolution Up to 8K@30hz
- Bandwidth up to 40Gbps
- PD 3.0 up to 100W
- Support USB, DisplayPort, and PCI express protocols
- Backwards compatible with USB3.2, USB2.0 and Thunderbolt™3
- USB-IF Certified



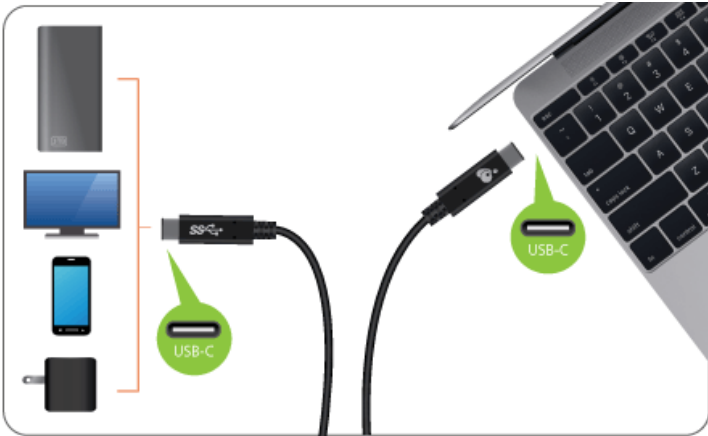

Requirements

- USB-C enabled device or system
- Thunderbolt™ 3 enabled device or system

Package Contents

- 1 x USB-C Male to Male Cable 2.6ft (0.8m)

Specifications

Function	G2LU4CCM01
Cable Length	0.8 m (31.5 in)
Cable Type	Coaxial Cable
Capacity	PD 3.0 Up to 100W
Connectors	USB Type C to C
Connectors	
Video Output	Up to 8K @ 30hz
USB bandwidth	Up to 40 Gbps

Dimensions	G2LU4CCM01
Unit Dimensions	
Length	0.8 m (31.5 in)
Inner Pack	
Height	4.3 in (11 cm)
Length	9.4 in (24 cm)
Width	8.6 in (22 cm)
Inner Pack Qty.	12 pcs
Unit Package Dimensions	
Height	7.3 in (18.6 cm)
Width	3.9 in (10.1 cm)
Depth	0.3"
Master Carton	
Height	18.11 in (46 cm)
Length	10.2 in (26 cm)
Width	9.45 in (24 cm)
Master Carton Qty.	48 pcs
Weight	
Master Carton Wt.	7.7 lbs (3.5 kg)
Inner Pack Wt.	1.5 lbs (0.7 kg)
Unit Pack Wt.	0.11 lbs (0.06 kg)
Physical Properties	
Unit Weight	0.1 lbs (0.04 kgs)