

GCE500U

USB VGA KVM Console Extender



The IOGEAR USB VGA KVM Console Extender allows access to a PC with USB or USB KVM switch from a remote USB VGA console (VGA monitor, USB keyboard, and USB mouse) via CAT5e/6 cable up to 500 feet away.


This unit is perfect for moving the console away from the computer or the KVM switch. Your console can be moved out of the server room to a location that may be more comfortable and quieter. It is also useful for security and monitoring purposes; you can place the unit in a secure area at the same time that you put the console in the most convenient location for user access and monitoring.

An USB VGA KVM Console Extender is a cost effective solution because it uses inexpensive UTP (CAT5e/6) cabling to extend the distance, versus expensive and bulky coaxial cabling. It is easy to install and operate thanks to its Auto Signal Compensation (ASC) technology, which senses the distance and adjusts the signal levels accordingly so there is no need to do any DIP switch setting. It also provides a built-in Application-Specific Integrated Circuit (ASIC) for greater reliability and compatibility


- Extend your KVM console (VGA monitor, USB keyboard & mouse) connection up to 500 ft. via CAT5e cables
- Auto Signal Compensation (ASC) helps make installation easy, with no need to configure DIP switches
- Built-in Application-Specific Integrated Circuit (ASIC) for greater reliability and compatibility
- Dual Console Operation - Control your system from either the local or remote console
- Built-in 8KV ESD protection and 2KV surge protection
- Maximum video resolution up to:
 - 1920 x 1200 @ 60Hz (100 ft. - 30m)
 - 1600 x 1200 @ 60HZ (330 ft. - 100m)
 - 1280 x 1024 @ 60Hz (500 ft. - 150m)
- USB over-current detection and prevention
- Easy To Operate - Push button selection between local and remote console
- Local monitor supports DDC; DDC2; DDC2B
- Rack Mountable (rack mount kit included)
- Plug-N-Play - No need for any software driver installation



Standard Mode

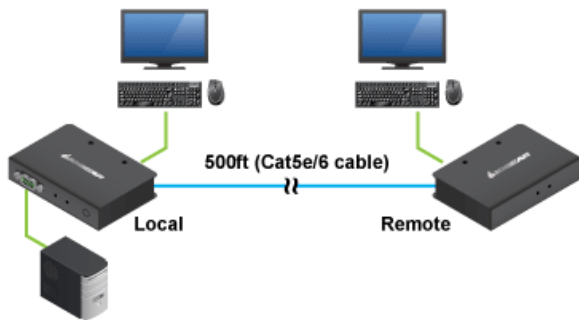

Advanced Mode

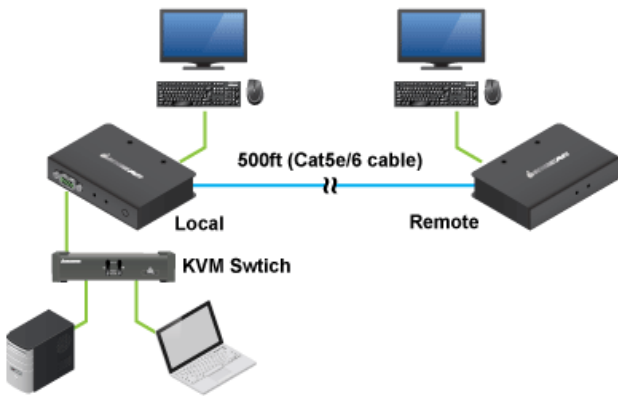

Requirements

- A Solid CAT5e/6 Cable

Console:

- VGA, SVGA, SXGA, UXGA, WUXGA or multi-sync monitor
- USB keyboard and mouse

Computers:

- VGA, SVGA, SXGA, UXGA, WUXGA or multi-sync video output
- An available USB port

Package Contents

- 1 x GCE500U Local Unit
- 1 x GCE500U Remote Unit
- 2 x Rack Mount Kit
- 1 x USB KVM Cable
- 2 x Grounding Wire
- 2 x Power Adapter
- 1 x Installation Guide
- 1 x Warranty Card

Specifications

Function	GCE500U	Dimensions	GCE500U
Console Connectors		Unit Dimensions	
Monitor	1 x HDB-15 Female	Width	5in.
Keyboard	1 x USB Type A Female	Height	1in.
Mouse	1 x USB Type A Female	Depth	3.375in.
CPU Connectors		Unit Package Dimensions	
Keyboard, Mouse, and Monitor	1 x SPHD-17 Female (Green)	Width	11.25in.
Unit to Unit Connectors	1 x RJ45 Female	Height	7in.
Power Connections	1 x DC Jack	Depth	4in.
Function Keys	1 x Operating Mode Pushbutton	Master Carton	
LEDs		Width	12in.
Local	1 x Local; 1 x Remote	Height	15.25in.
Remote	1 x Remote; 1 x Link	Depth	12.5in.
Emulation		Master Carton Qty.	6
Keyboard	USB	Weight	
Mouse	USB	Master Carton Wt.	21.06lb
Power Consumption		Unit Pack Wt.	3.28lb
Local: DC5.3V, 2.31W; Remote: DC5.3V, 2.84W		Unit Wt. w/accessories	2.74lb
Power		Unit Wt.	1.41lb
Voltage	DC5.3V		
Amps	0.94A		
Video Resolution	Up to 1920x1200@60Hz		
Cable Distance	Up to 495ft (150m)		
Environment			
Operation Temperature	0-50°C		
Storage Temperature	-20-60°C		
Humidity	0-80% RH; Non-condensing		
Housing			
Case	Metal		