

GCL1900W

18.5" Widescreen Short Depth LCD Console with Audio





- Integrated LCD KVM console with 18.5" widescreen LCD monitor
- Single rail housing with top & bottom clearance for smooth operation in a 1U high system rack
- LCD monitor supports resolution of 1366 x 768 @60Hz
- Short depth design allows for rack-mounting in narrow spaces
- Supports VGA video input; supports an external console with USB/VGA connectors

18.5" Widescreen Short Depth LCD KVM Console

IOGEAR's GCL1900W, 18.5" Widescreen LCD KVM Console, offers a space-saving, streamlined approach to IT environments by integrating a 18.5" widescreen LCD monitor, keyboard, and touchpad in one unit. The LCD drawer supports an external USB mouse and external console ports for added flexibility.

- Integrated LCD KVM console with 18.5" widescreen LCD monitor
- Single rail housing with top & bottom clearance for smooth operation in a 1U high system rack
- LCD monitor supports resolution of 1366 x 768 @60Hz
- Short depth design allows for rack-mounting in narrow spaces
- Supports VGA video input; supports an external console with USB/VGA connectors
- Built-in USB Type-A port on front panel for peripheral sharing
- Supports 2.1 audio
- Console lock design enables the console drawer to remain securely locked away in position when not in use
- Console selection via hotkey
- Multilingual keyboard mapping supports English (US), English (UK), French, German, German (Swiss), Greek, Hungarian, Italian, Japanese, Korean, Russian, Spanish, Swedish, Turkish and Traditional Chinese
- Standard rack mount kit included
- Plug-n-Play
- Firmware upgradable
- Hot pluggable



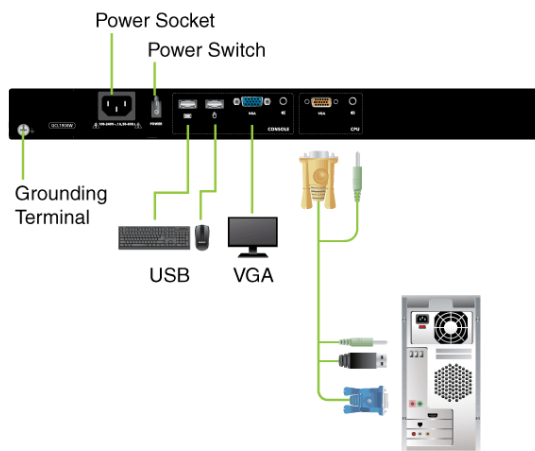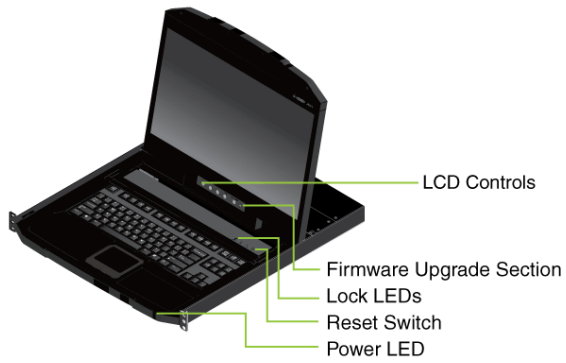

Requirements

Computers:

- VGA, SVGA, or MultiSync video graphics card with an HDB-15 port
- USB mouse and keyboard ports (6-pin mini DIN) or 1 USB port

Package Contents

- 1 x 18.5" Widescreen Short Depth LCD KVM Console
- 1 x USB KVM Cable
- 1 x Firmware Upgrade Cable
- 1 x Grounding Wire
- 1 x Standard Rackmount Kit (Fits 1 6.6~28.3 Inch Depth)
- 1 x Power Cord
- 1 x Quick Start Guide

Specifications

Function	GCL1900W
Computer Connections	
Direct	1
Connectors	
Power	1 x 3-Prong AC Socket
Computer/KVM	1 x SPHD Female (Yellow) 1 x 3.5 mm Audio Jack Female (Green)
USB-A	1
External Console Ports	1 x HDB-15 Female (Blue) 2 x USB Type A Female 1 x 3.5 mm Audio Jack Female (Green)
Switches	
F/W Upgrade	1 x Slide Switch
Power	1 x Rocker Switch
Reset	1 x Semi-recessed Pushbutton
LCD Power	1 x Pushbutton
LCD Adjustment	4 x Pushbutton
Emulation	
Keyboard	USB
Mouse	USB
Video Resolution	
Input Resolution: 1920 x 1200 @60 Hz	
Power	
Amps	100-240 V AC, 50-60Hz, 1A
Voltage	
Panel Spec	
Contrast Ratio	700:1
LCD Module	18.5" TFT-LCD
Luminance	200cd/m ²
Resolution	1366 x 768 @60 Hz
Response Time	5 ms
Support Color	16.7M colors
Viewing Angle	170° (H), 160° (V)
Environment	
Storage Temperature	-20?60 C
Operation Temperature	0?40 C
Humidity	0?80% RH Non-condensing
Housing	
Case	Metal + Plastic

Dimensions	GCL1900W
Unit Dimensions	
Height	1.7" (4.28cm)
Length	18.9" (48.06 cm)
Width	18.8" (47.70 cm)
Master Carton	
Height	5.5" (13.97 cm)
Length	26.0" (66.0 cm)
Width	24.3" (61.7 cm)
Master Carton Qty.	1
Weight	
Master Carton Wt.	27.0 lb. (12.27kg)
Unit Wt.	20.0 lb. (9.09kg)
Physical Properties	
Housing	Metal