

GCL1916KIT

16-Port 19" LCD KVM Drawer Kit with PS/2 and USB KVM Cables



- Integrated 16-port KVM console featuring a 19" TFT LCD active matrix monitor, keyboard and touchpad
- 1280x1024 resolution on 19" rack mount LCD provides a sharp video display
- Auto Scan Mode to monitor connected computers
- Broadcast Mode to send commands to all connected computers
- Adjustable mounting rail to fit different sizes of racks


16-Port KVM LCD Console


IOGEAR's GCL1916 is an integrated LCD console with an 16-port KVM (keyboard, video, and mouse) switch that offers secure access to 16 VGA, USB or PS/2 computers. It features a convenient rack mountable sliding / retractable 19" TFT LCD active matrix monitor and keyboard with built-in touchpad for a space-saving and streamlined integration. The GCL1916 fits into a universal 1U rack mount space.

The GCL1916 supports both PS/2 and USB keyboards and mice for the connected computers, and supports USB peripheral devices for the attached computers. A single GCL1916 can control up to 16 computers, but as many as 16 additional compatible KVM switches can be cascaded to reach up to 256 computers* controlled from a single keyboard, monitor and mouse console.

- Integrated 16-port KVM console featuring a 19" TFT LCD active matrix monitor, keyboard and touchpad
- 1280x1024 resolution on 19" rack mount LCD provides a sharp video display
- Auto Scan Mode to monitor connected computers
- Broadcast Mode to send commands to all connected computers
- Adjustable mounting rail to fit different sizes of racks
- Multiplatform OS support - Windows®, Mac and Linux®
- Easy to operate - computer selection via front panel pushbutton LED's, intuitive OSD (on-screen display), and hotkeys
- External USB or PS/2 with VGA Console port
- Cascade up to 2 levels - control up to 256 computers from a single console*
- Security - 2 level password protection for OSD
- DDC Emulation - Video settings of each computer are automatically adjusted for optimal output to the monitor
- Rack mountable in a 19" (1U) system rack
- Custom ASIC provides an auto-sensing function that recognizes the position of each station on the installation
- Fully Supports DDC2B

*Can only be cascaded with other IOGEAR KVMs: [GCS1808](#) or [GCS1716](#) models

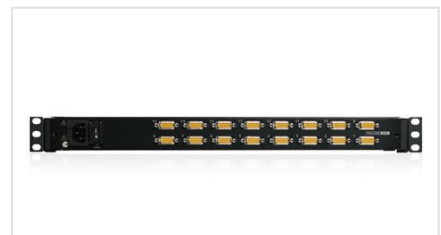

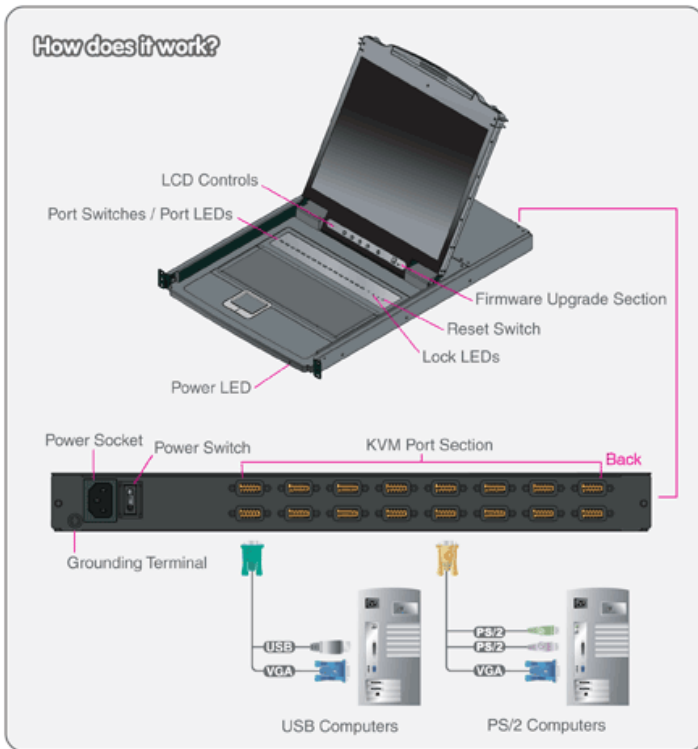

Requirements

- **Computers:**
- VGA, SVGA, or MultiSync video graphics card with an HDB-15 port
- PS/2 mouse and keyboard ports (6-pin mini DIN) or 1 USB port

Package Contents

- 1 x 16-Port 19" LCD KVM
- 4 x 6ft PS/2 KVM Cable
- 4 x 6ft USB KVM Cable
- 4 x 10ft PS/2 KVM Cable
- 4 x 10ft USB KVM Cable
- 1 x Firmware Upgrade Cable
- 1 x Standard Long Rack Mount Kit (Fits 27.6~41.3 Inch Depth)
- 1 x Power Cord
- 1 x Quick Start Guide
- 1 x Warranty Card

Specifications

Function	GCL1916KIT	Dimensions	GCL1916KIT
		Unit Dimensions	
		Height	27" (68.58cm)
		Length	17.75" (45.09cm)
		Depth	1.75" (4.45cm)
		Unit Package Dimensions	
		Height	32.5" (82.55cm)
		Width	26.75" (67.95cm)
		Depth	5.25" (13.34cm)
		Master Carton	
		Height	32.5" (82.55cm)
		Width	26.75" (67.95cm)
		Depth	5.25" (13.34cm)
		Weight	
		Master Carton Wt.	40.65lbs (18.52kg)
		Unit Pack Wt.	40.65lbs (18.52kg)
		Unit Wt. w/accessories	32.20lbs (14.6kg)
		Unit Wt.	28.05lbs (12.68kg)