

GCL1916WKITU

18.5" Widescreen Short Depth 16-Port LCD KVM Switch w/16x USB KVM Cables




- Integrated LCD KVM console with 18.5" widescreen LCD monitor in a single rail housing with top and bottom clearance for smooth operation in a 1U high system rack
- Integrated 16-port VGA KVM Switch with included cables
- Control up to 128/256 computers by cascading up to 2 levels with IOGEAR's GCS1716
- LCD monitor supports resolution of 1366 x 768 @60Hz
- Short depth design allows for rack-mounting in narrow spaces

16-Port Widescreen Short Depth LCD KVM Switch

IOGEAR's GCL1916WKITU is an integrated LCD console with a 16-port KVM (keyboard, video, and mouse) switch with 16 USB KVM cables that offers secure access to 16 VGA, USB or PS/2 computers. The KVM supports both PS/2 and USB keyboards and mice for the connected computers and supports USB peripheral devices for the attached computers.

- Integrated LCD KVM console with 18.5" widescreen LCD monitor in a single rail housing with top and bottom clearance for smooth operation in a 1U high system rack
- Integrated 16-port VGA KVM Switch with included cables
- Control up to 128/256 computers by cascading up to 2 levels with IOGEAR's GCS1716
- LCD monitor supports resolution of 1366 x 768 @60Hz
- Short depth design allows for rack-mounting in narrow spaces
- Supports VGA video input; supports an external console with USB/VGA connectors
- Built-in USB Type-A port on front panel for peripheral sharing HID devices
- Dual Interface - Supports computers with PS/2 or USB Keyboards and Mice
- Auto PS/2 and USB interface detection
- Keyboard and mouse emulation (PS/2 and USB) for smooth switching and simultaneously booting multiple computers even when the console's focus is elsewhere
- Console lock design enables the console drawer to remain securely locked away in position when not in use
- Computer selection via pushbuttons, hotkeys, and multilingual On Screen Display (OSD)
- Broadcast mode - enables to send commands from the console to all connected computers to perform simultaneous operations
- Two level password security - only authorized users can view and control computers
- Auto Scan Mode - enables continuous monitoring of user-selected computers
- Multilingual keyboard mapping supports English (US), English (UK), French, German, German (Swiss), Hungarian, Italian, Japanese, Korean, Russian, Spanish, Swedish, and Traditional Chinese
- Standard rack mount kit included
- Plug-n-Play
- Firmware Upgradable
- Hot Pluggable



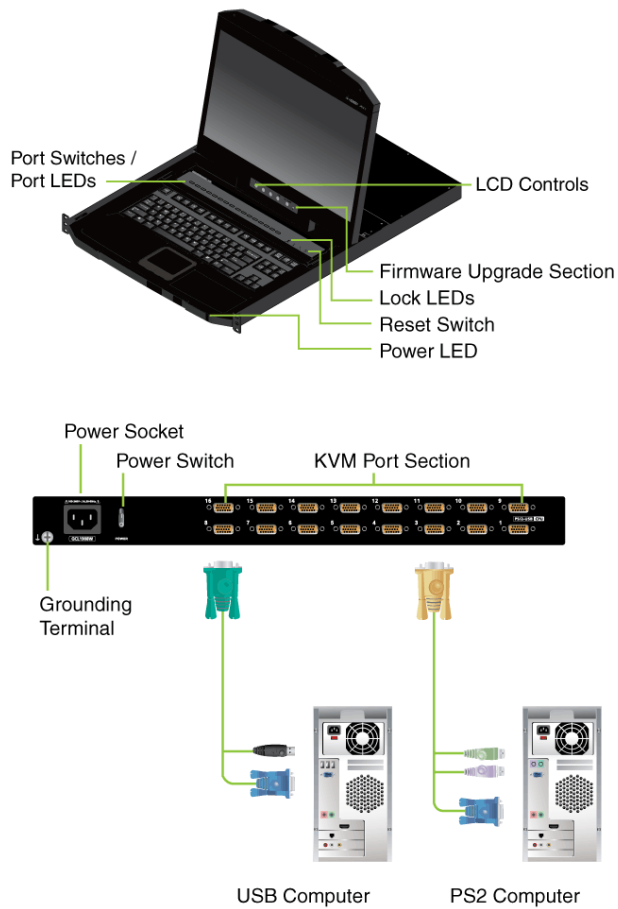

Requirements

Computers:

- VGA, SVGA, or MultiSync video graphics card with an HDB-15 port
- USB or PS/2 mouse and keyboard ports (6-pin mini DIN) or 1 USB port

Package Contents

- 1 x 16-Port 18.5" Widescreen Short Depth LCD KVM Switch
- 8 x USB KVM Cable (6ft - G2L5202U)
- 8 x USB KVM Cable (10ft - G2L5203U)
- 1 x PS/2 KVM Cable
- 1 x Firmware Upgrade Cable
- 1 x Grounding Wire
- 1 x Standard Rackmount Kit (Fits 1 6.6~28.3 Inch Depth)
- 1 x Power Cord
- 1 x Quick Start Guide

Specifications

Function	GCL1916WKITU	Dimensions	GCL1916WKITU
Computer Connections		Unit Dimensions	
Direct	16	Height	1.7" (4.28 cm)
Daisy Chain or Cascading	256	Length	24.9" (63.24 cm)
Port Selection		Width	18.9" (48.06 cm)
OSD, Hotkeys, Pushbuttons		Master Carton	
Connectors		Height	6.5" (16.51 cm)
Computer/KVM	16 x SPHD-18 Male	Length	37.3" (94.74 cm)
USB-A	1 x USB Type A Female	Width	30.3" (76.96 cm)
Power	1 x 3-Prong AC Socket	Master Carton Qty.	1
Switches		Weight	
Reset	1 x Semi-recessed Pushbutton	Master Carton Wt.	43.0 lb. (19.54kg)
Power	1 x Rocker Switch	Unit Wt.	23.4 lb. (10.63kg)
F/W Upgrade	1 x Slide Switch		
LCD Power	1 x LED Pushbutton (Orange)		
LCD Adjustment	4 x Pushbutton		
Port Selection	16 x Pushbutton		
LEDs			
On Line	16 (Orange)		
Power On	Dark Green		
Emulation			
Keyboard	PS/2, USB		
Mouse	PS/2, USB		
Video Resolution			
1366x768@60Hz			
Scan Interval			
1 - 255 seconds			
Power Input Rating			
Per AC Power Inlet, 50/60Hz	100~240VAC, 50/60Hz, 1A		
Power Consumption			
110V: 14.1W: 70BTU			
Environment			
Operation Temperature	0~40°C		
Storage Temperature	-20~60°C		
Humidity	0~80% RH; Non-condensing		
Housing			
Case	Metal and Plastic		