

GCS62


## MiniView™ Micro PS/2 KVM Switch with cables



Introducing the two port MiniView™ Micro KVM switch from IOGEAR - a simple solution for those with more PCs than hands. Use one keyboard, one monitor and one mouse to control two PCs or Macintosh systems.\* This self-powered KVM switch features mouse & keyboard emulation to ensure smooth operation, as well as support for Plug-n-Play monitors and most wheel mice. Patented VSE Video Signal Enhancement® technology provides rich, 32-bit color at resolutions up to 1920 x 1440. With KVM cables (6' long) molded into the unit, all you need to do is to plug it into your computers, and you've got a complete KVM solution from IOGEAR. \* Macintosh support requires IOGEAR's Mac Adapter.

This 2-port KVM also offers a cost effective solution to increase security by allowing users to switch between the Internet connected PC and an Intranet connected PC.

- Use one keyboard, monitor and mouse to control two computers
- Increase security for your intranet by separating a PC connected to the Internet and a PC connected to an Intranet
- Molded-in cables to simplify setup
- Microsoft Intellimouse, Logitech FirstMouse+, MouseMan+, and most PS/2 mice are supported
- Port selection through convenient Hot Keys
- PS/2 mouse emulation for error-free boot-up
- Save space and reduce desktop clutter
- Plug-n-Play monitor support
- Support video resolutions up to 1920 x 1440
- No software required
- Built in AutoScan mode
- LEDs allow for easy status monitoring
- 3 Year Limited Warranty

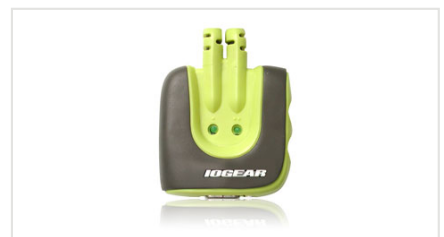

## Requirements

- Computers with PS/2 mouse connections, PS/2 keyboard connections, and HDB15 VGA connection.

## Package Contents

- 1 x Miniview™ Micro 2-port KVM
- 1 x User manual
- 1 x Warranty card

## Specifications

Function	GCS62	Dimensions	GCS62
<b>Housing</b>		<b>POP Information</b>	
Case	Plastic	10" Peg Hook	4
<b>CPU Connectors</b>		<b>Unit Dimensions</b>	
Mouse	2x6 pin mini-DIN Female (PS/2)	Height	2.25 in. (5.72 cm.)
Keyboard	2x6 pin mini-DIN Female (PS/2)	Depth	0.875 in. (2.22 cm.)
Monitor	2xHDB15 Male (Std. VGA/SVGA)	Width	2.5 in. (6.35 cm.)
<b>Console Connectors</b>		<b>Inner Pack</b>	
Mouse	1x6 pin mini-DIN Female (PS/2)	Height	10.25 in. ( 26 cm)
Keyboard	1x6 pin mini-DIN Female (PS/2)	Length	7 in. ( 17.8 cm)
Monitor	1xHDB15 Female (Std. VGA/SVGA)	Width	9 in. ( 22.86 cm)
<b>LEDs</b>		Inner Pack Qty.	3
Selected	2	<b>Unit Package Dimensions</b>	
<b>Port Selection</b>	Hot Keys	Height	10 in. ( 25.4 cm )
<b>Video Resolution</b>	1920x1440; DDC, DDC2, DDC2B	Width	6.5 in.
<b>Scan Interval</b>	5 seconds	Depth	3 in. (7.62 cm.)
<b>Emulation</b>		<b>Master Carton</b>	
Keyboard	PS/2, AT (AT to PS/2 adapter required.)	Height	14.5 in. ( 36.83 cm)
Mouse	PS/2	Width	18.5 in. ( 47 cm)
<b>Computer Connections</b>		Depth	11 in. ( 28 cm)
Direct	2	Master Carton Qty.	12
<b>Cable Length</b>	6 in. (0.5 ft./0.15 m.)	<b>Weight</b>	
		Master Carton Wt.	17.92 lb. ( 8.1 kg )
		Inner Pack Wt.	4.05 lb. ( 1.83 kg)
		Unit Pack Wt.	1.2 lb. ( 0.544 kg )
		Unit Wt.	1 lbs. (0.45 kg.)