ÓIDGEAR

CCS62HDPKIT 2-Port HDMI and DisplayPort Cable KVM Kit

- Switch between two computers with the push of a button
- Offers the flexibility to mix and match computer connections:
- HDMI and DisplayPort1.1a
- Includes 2 x DisplayPort to HDMI adapters
- No external power needed
- Save Cabling Costs: ALL cables are included



2-Port Cable HDMI / DisplayPort KVM Switch

- Switch between two computers with the push of a button
- Offers the flexibility to mix and match computer connections: HDMI and DisplayPort1.1a
- · Includes 2 x DisplayPort to HDMI adapters
- No external power needed
- Cost effective, Plug-N-Play solution
- Connect and control two HD or DisplayPort USB 2.0 interface computers with a single keyboard and mouse
- Full 1080p and up to 1920 x 1200 @ 60Hz
- Port switching via remote switch button, mouse or hotkeys
- Hotkeys allows independent KVM and audio switching between
- computers
- DisplayPort1.1a Compliant (with included adapters)
- Includes 2.1 stereo sound and microphone support
 USB 2.0 Peripheral Sharing via mouse port. Connect a powered USB
- Hub to expand your USB connectivity*
 USB mouse and keyboard emulation for error-free boot-up and
- OSB mouse and keyboard emulation for error-free boot-up and instantaneous recognition when switching computers
- Power-On Detection If one of the computers is powered off, it will automatically switch to the next powered-on computer
- Re-programmable hotkey activation for keyboards without a scroll lock key
- Keyboard emulation can be disabled to support gaming keyboard's special keys
- · Mouse emulation can be disabled to support mice with special keys


- Digital Audio support
- HDCP Compliant
- Supports Windows® 7, 8.1, 10, 11, Mac OS® X 9.0+, Linux®, Unix and other USB supported systems
- Works with game consoles
- Mac and Sun keyboard support
- Firmware upgradeable
- · All cables are included
- Plug-n-play; no software required
- DisplayPort to HD Adapters:
 - Converts your DisplayPort to HDMI so you can connect to your HDMI projector, TV or monitor
 - Works with computer systems using DisplayPort
 - Compliant with Displayport Specification 1.1a for both 1.62 Gbps and 2.7 Gbps
 - Support full DisplayPort link tracking
 - Supported resolutions:
 - Full HD 1080p
 - 1920x1200
 - Compliant with DVI 1.0 up to 1.65Gbps
 - Support interrupt request output for expansion function
 - Support Deep Sleep Mode (suspend mode)

*Mouse emulation must be disabled for this feature to function correctly







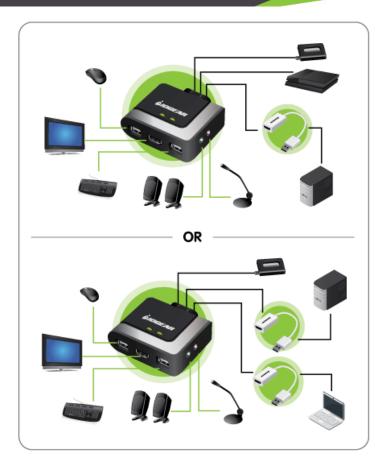

Requirements

• Console:

Package Contents

• 1 x GCS62HU

 2 x DisplayPort to HDMI Adapters

• 1 x Installation Guide

• 1 x Warranty Card

- 1 x HDMI display
- 1 x standard 104 key
- wired USB keyboard
 1 x standard 2 or 3
- 1 x standard 2 or 3 button wired USB mouse
- •
- Computers:
- 1 x HDMI or DisplayPort
- 2 x USB ports
- •
- Operating Systems:
- Windows® 7, 8.1, 10, 11
- Mac OS® X 9.0+
- Oracle® Solaris
- Linux®, Unix and other USB supported systems*

*Additional drivers and support may be needed

**IOGEAR's Display Emulation Technology provides the EDID support for Windows® 7



Specifications

Function	GCS62HDPKIT	Dimensions	GCS62HDPKIT
Computer Connections		POP Information	
Direct	2	10" Peg Hook	5
Console Connectors		6" Peg Hook	3
Monitor	1 x HDMI Female	Unit Dimensions	
Audio	1 x 3.5mm Mini Stereo Jack Female (Green)	Height	2.5" (6.35cm)
Microphone	1 x 3.5mm Mini Stereo Jack Female (Pink)	Length	3.125" (7.93cm)
Keyboard	1 x USB Type A Female	Depth	1" (2.54cm)
Mouse	1 x USB Type A Female	Unit Package Dimensions	
CPU Connectors		Height	9.25" (23.49cm)
Monitor	2 x HDMI Male; 2 x DisplayPort Male (with adapter)	Width	6.5" (16.51cm)
Audio	2 x 3.5mm Mini Stereo Jack Male (Green)	Depth	2.75" (6.99cm)
Microphone	2 x 3.5mm Mini Stereo Jack Male (Pink)	Master Carton	
Keyboard	2 x USB Type A Male (Purple)	Height	9.5" (24.13cm)
Mouse	2 x USB Type A Male (Black)	Width	16" (40.64cm)
LEDs	2 x USB Type A Male (black)	Depth	7.5" (19.05cm)
On Line	2 x Green	Master Carton Qty.	6
Emulation		Weight	
Keyboard	USB	Master Carton Wt.	8.6lb (3.91kg)
Mouse	USB	Unit Pack Wt.	1.3lb (0.59kg)
Scan Interval	3, 5, 10 , 20 seconds (Default 5 seconds)	Unit Wt.	.94lb (0.43kg)
Environment	5, 5, 10, 20 seconds (Derault 5 seconds)		
Storage Temperature	-20~60?C		
Operation Temperature	0~50?C		
Humidity	0~80%; Non-condensing		
Housing	Diastia		
Case	Plastic		
Video Resolution	1080p; 1920x1200		
Port Selection	Remote Switch, Hotkey, and Mouse		