

GCS62HDPKIT

## 2-Port HDMI and DisplayPort Cable KVM Kit




- Switch between two computers with the push of a button
- Offers the flexibility to mix and match computer connections: HDMI and DisplayPort1.1a
- Includes 2 x DisplayPort to HDMI adapters
- No external power needed
- Save Cabling Costs: ALL cables are included

### 2-Port Cable HDMI / DisplayPort KVM Switch

- Switch between two computers with the push of a button
  - Offers the flexibility to mix and match computer connections: HDMI and DisplayPort1.1a
  - Includes 2 x DisplayPort to HDMI adapters
  - No external power needed
  - Cost effective, Plug-N-Play solution
- 
- Connect and control two HD or DisplayPort USB 2.0 interface computers with a single keyboard and mouse
  - Full 1080p and up to 1920 x 1200 @ 60Hz
  - Port switching via remote switch button, mouse or hotkeys
  - Hotkeys allows independent KVM and audio switching between computers
  - DisplayPort1.1a Compliant (with included adapters)
  - Includes 2.1 stereo sound and microphone support
  - USB 2.0 Peripheral Sharing via mouse port. Connect a powered USB Hub to expand your USB connectivity\*
  - USB mouse and keyboard emulation for error-free boot-up and instantaneous recognition when switching computers
  - Power-On Detection – If one of the computers is powered off, it will automatically switch to the next powered-on computer
  - Re-programmable hotkey activation for keyboards without a scroll lock key
  - Keyboard emulation can be disabled to support gaming keyboard's special keys
  - Mouse emulation can be disabled to support mice with special keys
- 
- Digital Audio support
  - HDCP Compliant
  - Multi OS platform support
  - Works with game consoles
  - Mac and Sun keyboard support
  - Firmware upgradeable
  - All cables are included
  - Plug-n-play; no software required
  - DisplayPort to HD Adapters:
    - Converts your DisplayPort to HDMI so you can connect to your HDMI projector, TV or monitor
    - Works with computer systems using DisplayPort
    - Compliant with Displayport Specification 1.1a for both 1.62 Gbps and 2.7 Gbps
    - Support full DisplayPort link tracking
    - Supported resolutions:
      - Full HD 1080p
      - 1920x1200
    - Compliant with DVI 1.0 up to 1.65Gbps
    - Support interrupt request output for expansion function
    - Support Deep Sleep Mode (suspend mode)

\*Mouse emulation must be disabled for this feature to function correctly



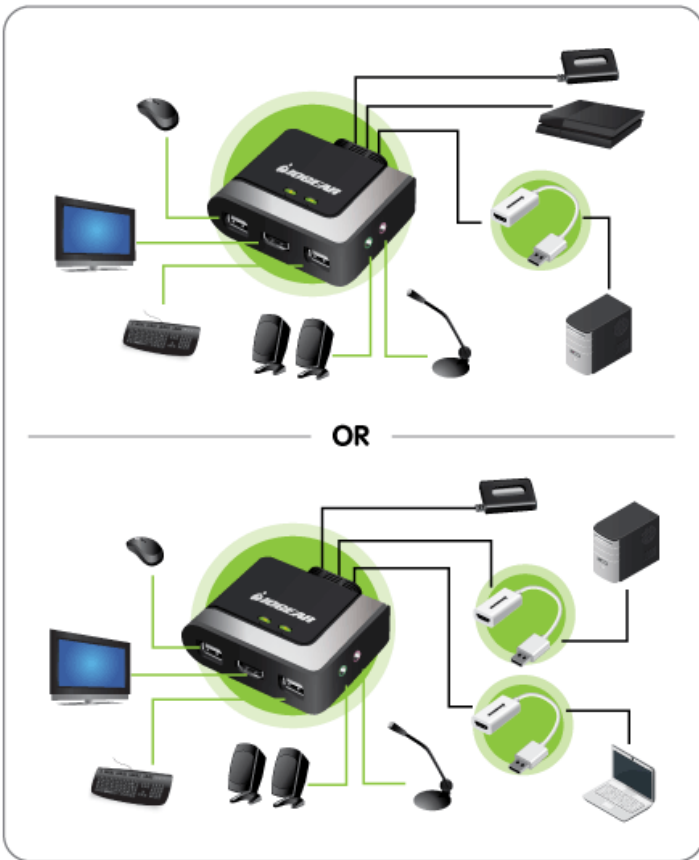

### Requirements

### Package Contents

- |   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• Console:</li> <li>• 1 x HDMI display</li> <li>• 1 x standard 104 key wired USB keyboard</li> <li>• 1 x standard 2 or 3 button wired USB mouse</li> <li>•</li> <li>• Computers:</li> <li>• 1 x HDMI or DisplayPort</li> <li>• 2 x USB ports</li> <li>•</li> <li>• Operating Systems:</li> <li>• Windows Vista®, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10</li> <li>• Mac OS® X 9 to 10.x</li> <li>• Oracle® Solaris</li> <li>• Linux®, Unix and other USB supported systems*</li> </ul> | <ul style="list-style-type: none"> <li>• 1 x GCS62HU</li> <li>• 2 x DisplayPort to HDMI Adapters</li> <li>• 1 x Installation Guide</li> <li>• 1 x Warranty Card</li> </ul> |
|---|--|

*\*Additional drivers and support may be needed*

*\*\*IOGEAR's Display Emulation Technology provides the EDID support for Windows® 7*

## Specifications

Function	GCS62HDPKIT
<b>Computer Connections</b>	
Direct	2
<b>Console Connectors</b>	
Monitor	1 x HDMI Female
Audio	1 x 3.5mm Mini Stereo Jack Female (Green)
Microphone	1 x 3.5mm Mini Stereo Jack Female (Pink)
Keyboard	1 x USB Type A Female
Mouse	1 x USB Type A Female
<b>CPU Connectors</b>	
Monitor	2 x HDMI Male; 2 x DisplayPort Male (with adapter)
Audio	2 x 3.5mm Mini Stereo Jack Male (Green)
Microphone	2 x 3.5mm Mini Stereo Jack Male (Pink)
Keyboard	2 x USB Type A Male (Purple)
Mouse	2 x USB Type A Male (Black)
<b>LEDs</b>	
On Line	2 x Green
<b>Emulation</b>	
Keyboard	USB
Mouse	USB
<b>Scan Interval</b>	3, 5, 10, 20 seconds (Default 5 seconds)
<b>Environment</b>	
Storage Temperature	-20~60°C
Operation Temperature	0~50°C
Humidity	0~80%; Non-condensing
<b>Housing</b>	
Case	Plastic
<b>Video Resolution</b>	1080p; 1920x1200
<b>Port Selection</b>	Remote Switch, Hotkey, and Mouse

Dimensions	GCS62HDPKIT
<b>POP Information</b>	
10" Peg Hook	5
6" Peg Hook	3
<b>Unit Dimensions</b>	
Height	2.5" (6.35cm)
Depth	1" (2.54cm)
Length	3.125" (7.93cm)
<b>Unit Package Dimensions</b>	
Width	6.5" (16.51cm)
Height	9.25" (23.49cm)
Depth	2.75" (6.99cm)
<b>Master Carton</b>	
Width	16" (40.64cm)
Height	9.5" (24.13cm)
Depth	7.5" (19.05cm)
Master Carton Qty.	6
<b>Weight</b>	
Master Carton Wt.	8.6lb (3.91kg)
Unit Pack Wt.	1.3lb (0.59kg)
Unit Wt.	.94lb (0.43kg)