IOGEAR®

GCS72DPKIT

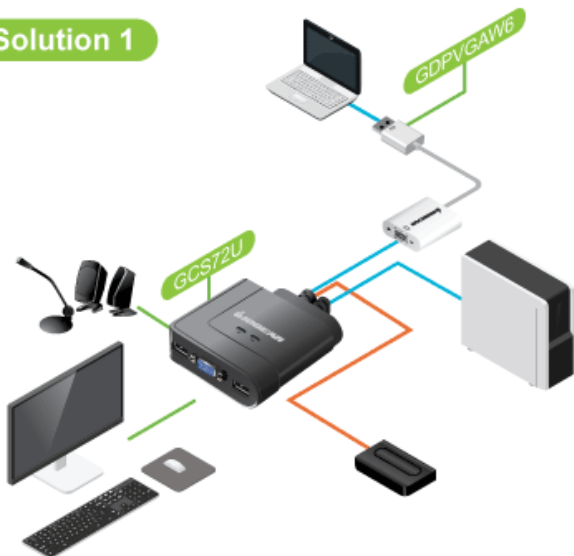# 2-Port USB VGA and DisplayPort Cable KVM Kit

- Switch between two computers with the push of a button
- Offers the flexibility to mix and match computer connections: VGA and DisplayPort
- Includes 2 x DisplayPort to VGA adapters
- No external power needed
- Save Cabling Costs: All cables are included

2-Port Cable VGA / DisplayPort KVM Switch

- Switch between two computers with the push of a button
- Offers the flexibility to mix and match computer connections: VGA and DisplayPort
- Includes 2 x DisplayPort to VGA adapters
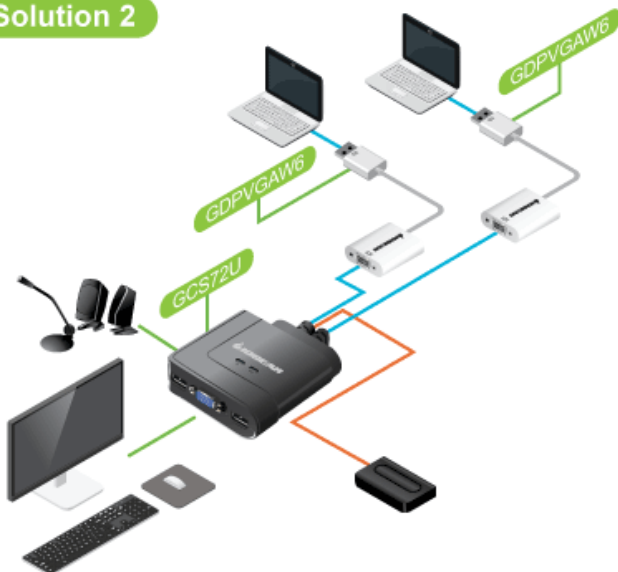- No external power needed
- Cost effective, Plug-N-Play solution

- Switch between two computers with the push of a button
- Offers the flexibility to mix and match computer connections: VGA and DisplayPort
- Includes 2 x DisplayPort to VGA adapters
- No external power needed
- Cost effective, Plug-N-Play solution
- One USB keyboard, USB mouse, and VGA monitor control two computers
- Max resolution: 2048 x 1536, DDC2B
- 2.1 Stereo audio and microphone support
- 3' long molded-in cables to simplify setup
- Compatible with PC, MAC and SUN operating platforms
- Supports Windows XP or higher, Mac OS 9.0 or higher, Sun Solaris 9 or higher
- Full Mac keyboard support

- Supports programmable mice
- All cables included
- 2 x DisplayPort to VGA Adapters convert your DisplayPort to VGA:
  - Works with computer systems using DisplayPort
  - Compliant with Displayport Specification 1.1a for both 1.62 Gbps and 2.7 Gbps
  - Support full DisplayPort link tracking
  - Supported resolutions:
    - Full HD 1080p
    - 1920x1200
    - VGA, SVGA, XGA, SXGA and UXGA at 162 MHz pixel rate
  - Support interrupt request output for expansion function
  - Support Deep Sleep Mode (suspend mode)

Solution 1

GDPVGAW6

GCS72U

Solution 2

GDPVGAW6

GDPVGAW6

GCS72U

Requirements

- **Console:**
- 1 x VGA display
- 1 x standard 104 key wired USB keyboard
- 1 x standard 2 or 3 button wired USB mouse
-
- **Computers:**
- VGA or DisplayPort port
- USB ports
- 3.5mm audio port (optional)
-
- **Operating Systems:**
- Windows Vista®, Windows® 7, Windows® 8.1, Windows® 10
- Mac OS 9 to 10.x
- Oracle® Solaris
- Linux®, Unix and other USB supported systems*

*Additional drivers and support may be needed

Package Contents

- 1 x 2-Port USB Cable KVM
- 2 x DisplayPort to VGA Adapters
- 1 x Quick Start Guide
- 1 x Warranty Card

at Home   at Work   on-the-Go

Specifications

Function	GCS72DPKIT		Dimensions	GCS72DPKIT
Computer Connections			**POP Information**	
Direct	2		10" Peg Hook	4
Console Connectors			6" Peg Hook	2
Monitor	VGA		**Unit Dimensions**	
Keyboard	USB		Height	6" (15.24cm)
Mouse	USB		Depth	7" (17.78cm)
CPU Connectors			Length	2" (5.08cm)
Monitor	2 x VGA; 2 x DisplayPort (with adapters)		**Unit Package Dimensions**	
Keyboard & Mouse	2 x USB		Width	6.25" (15.87cm)
LEDs			Height	8.87" (22.54cm)
On Line	Green		Depth	2.25" (5.72cm)
Video Resolution	2048x1536 (VGA), 1920x1200 (with adapters)		**Master Carton**	
Port Selection	Remote Pushbutton		Width	8" (20.32cm)
Cable Length	2 x 3ft each		Height	7" (17.78cm)
Cable Type	Bonded USB KVM		Depth	15.25" (38.74cm)
Housing			Master Carton Qty.	6
Case	Plastic		**Weight**	
			Master Carton Wt.	7.52lb (3.42kg)
			Unit Pack Wt.	1.14lb (0.52kg)
			Unit Wt. w/accessories	0.92lb (0.42kg)
			Unit Wt.	0.82lb (0.37kg)