

GCS922DPKIT

2-Port USB DVI and DisplayPort Cable KVM Kit



- Switch between two computers with the push of a button
- Offers the flexibility to mix and match computer connections: DVI and DisplayPort
- Includes 2 x DisplayPort to DVI adapters
- No external power needed
- Save Cabling Costs: ALL cables are included

2-Port Cable DVI / DisplayPort KVM Switch

- Switch between two computers with the push of a button
- Offers the flexibility to mix and match computer connections: DVI and DisplayPort
- Includes 2 x DisplayPort to DVI adapters
- No external power needed
- Cost effective, Plug-N-Play solution


DVI and DisplayPort Mix & Match Solution

IOGEAR's DVI and DisplayPort KVM Solution simplifies the method of sharing two computers using one DVI monitor, keyboard and mouse. This bundle is perfect for a home office or small / medium size business, as it offers the flexibility of choosing between DVI and/or DisplayPort connections. Take advantage of your existing computers, and use the included DisplayPort adapters to view your content on a DVI projector, monitor, or display. Streamline and develop efficient workstations by eliminating multiple desktop setups.


- Connect and control two DVI-D or DisplayPort USB 2.0 interface computers with a single keyboard and mouse
- Video resolution – up to 1920 x 1200 @60Hz
- USB mouse port can be used for USB peripheral sharing, such as external storage drive
- Computer Selection via push-button Remote Port Selector
- Supports USB hot-plugging
- Power supply not required
- All cables are included
- DisplayPort to DVI Adapters:
 - Compliant with DisplayPort Specification 1.1a for both 1.62 Gbps and 2.7 Gbps
 - Support full DisplayPort link tracking
 - Compliant with DVI 1.0 up to 1.65Gbps
 - Supports interrupt request output for expansion function
 - Supports Deep Sleep Mode (suspend mode)



Solution 1

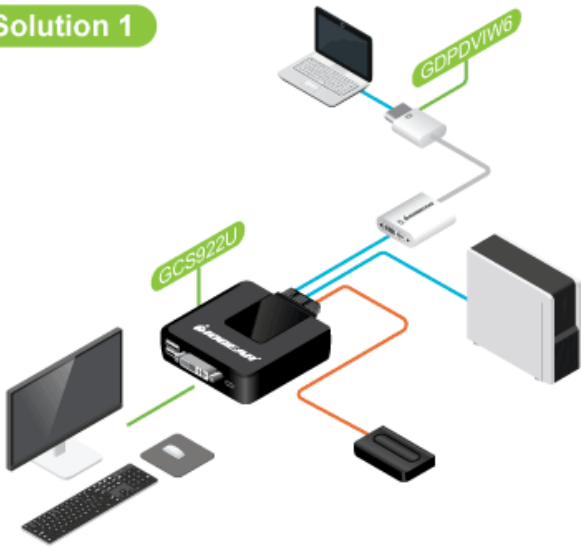

Solution 2

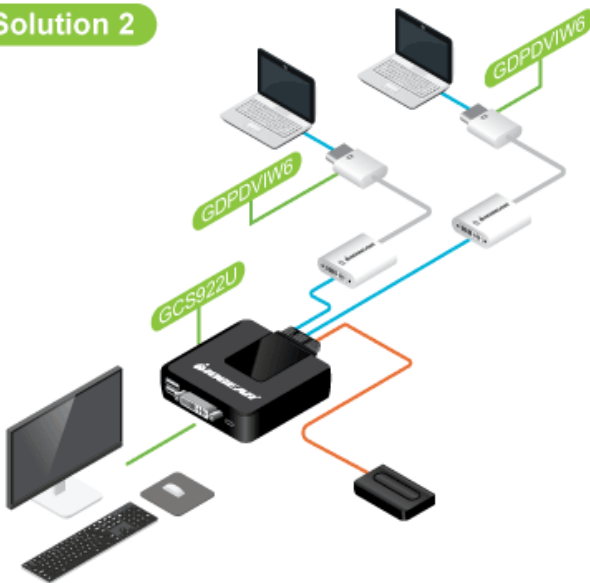

Requirements

Package Contents

- | | |
|---|---|
| <ul style="list-style-type: none"> • Console: • 1 x DVI display • 1 x standard 104 key wired USB keyboard • 1 x standard 2 or 3 button wired USB mouse • • Computers: • DVI-D Port or DisplayPort • USB Ports • • Operating Systems: • Windows Vista®, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10 • Mac OS 9 to 10.x • Oracle® Solaris • Linux®, Unix and other USB supported systems* | <ul style="list-style-type: none"> • 1 x GCS922U • 2 x DisplayPort to DVI Adapters • 1 x Quick Start Guide • 1 x Warranty |
|---|---|

*Additional drivers and support may be needed

Specifications

Function	GCS922DPKIT	Dimensions	GCS922DPKIT
Computer Connections		POP Information	
Direct	2	10" Peg Hook	5
Console Connectors		6" Peg Hook	3
Monitor	1 x DVI-D	Unit Dimensions	
Keyboard	1 x USB Type A Female	Height	1.06" (2.69cm)
Mouse	1 x USB Type A Female	Depth	4.06" (10.3cm)
CPU Connectors		Length	3.44" (8.74cm)
Monitor	2 x DVI-D Male; 2 x DisplayPort Male (adapters)	Unit Package Dimensions	
Keyboard & Mouse	2 x USB Type A Male	Width	6.13" (15.6cm)
LEDs		Height	8.81" (22.4cm)
On Line	2 x Green	Depth	2.25" (5.72cm)
Video Resolution		Master Carton	
	1900x1200 @60Hz	Width	6.75" (17.1cm)
Environment		Height	15" (38.1cm)
Storage Temperature	-20-60°C	Depth	8" (20.3cm)
Operation Temperature	0-50°C	Master Carton Qty.	6
Humidity	0-80%; Non-condensing	Weight	
Port Selection		Master Carton Wt.	7.2lb (3.27kg)
	Remote Switch	Unit Pack Wt.	1.1lb (0.5kg)
Cable Length		Unit Wt. w/accessories	0.85lb (0.39kg)
	2 x 4ft. ea KVM cables; 1 x 6ft. Remote Switch	Unit Wt.	0.75lb (0.34kg)
Cable Type			
	Bonded USB KVM		
Housing			
Case	Plastic		