

GCS92HU

## 2-Port 4K KVM Switch with HDMI, USB and Audio Connections



- Control and switch between two HDMI computers from a USB keyboard, mouse and HDMI monitor
- Superior video quality – up to 4K DCI (4096 x 2160 @60Hz)
- Multi-platform support – Windows, Mac and Linux
- HDMI™ and HDCP 2.2 compliant
- Port switching via remote switch button
- Supports USB hot-plugging (add or remove the device without shutting down the operating system)
- The console USB ports can be used for USB peripheral sharing (keyboard and mouse)<sup>1</sup>
- Easy installation, just plug and play
- Built-in cables
- Hook design for a space-saving and organized workstation
- Bus-powered – no external power adapter required
- 2.1 audio support
- 3-year warranty
- Free lifetime US-based technical support


### 2-Port 4K KVM Switch with HDMI Connection, USB and Audio

One of the most compact KVMs IOGEAR has to offer, the 2-Port 4K KVM Switch with HDMI Connection, USB and Audio is a must-have for users with two computers using one monitor, keyboard and mouse. It is perfect for a home office or small to medium-sized business that need to conserve workspace and streamline desktop setups.

- One USB keyboard, mouse and one HDMI monitor control two HDMI computers
- Superior video quality – up to 4K DCI (4096 x 2160 @ 60Hz)
- Computer selection via remote port selector
- HDMI compliant; [HDCP](#) 2.2 compliant
- Supports USB hot-plugging
- The console USB ports can be used for USB peripheral sharing
- Multiplatform support – Windows, Mac and Linux
- Plug and play
- Bus-powered – no external power adapter required<sup>1</sup>

Note: 1. The GCS92HU may require an external power supply via the USB Micro-B Power Port. For the USB Micro-B cable connecting to the USB Micro-B Power Port, it requires a separate purchase based on the type of the power supply you use.



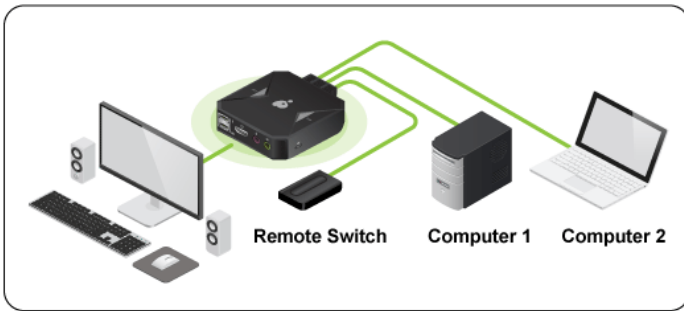

## Requirements

## Package Contents

### Console

- HDMI monitor
- Standard 104-key wired USB keyboard
- Standard 2 or 3 button wired USB mouse
- Speakers and Microphones (optional)

- 1x GCS92HU 2-Port 4K KVM Switch with HDMI Connection, USB and Audio
- 1x Quick Start Guide
- 1x Warranty Card

### Computers

- HDMI port
- USB Type-A port
- Audio ports (optional)

### Operating Systems

- Windows®7, 8.1, 10, 11
- Mac OS X 9.0+
- Oracle® Solaris
- Linux®, UNIX, and other USB supported systems

## Specifications

Function	GCS92HU	Dimensions	GCS92HU
<b>Computer Connections</b>		<b>Unit Dimensions</b>	
Direct	2	Height	1.06" (2.69cm)
<b>Port Selection</b>	Remote Pushbutton	Length	3.375" (8.57cm)
<b>Console Connectors</b>		Depth	3.25" (8.27cm)
Monitor	1 x HDMI	<b>Unit Package Dimensions</b>	
Keyboard	1 x USB Type A	Height	8.875" (22.5cm)
Mouse	1 x USB Type A	Length	6.125" (15.56cm)
Audio	1 x 3.5mm Mini Stereo Jack (Green)	Depth	2.18" (5.54cm)
Microphone	1 x 3.5mm Mini Stereo Jack (Pink)	<b>Master Carton</b>	
<b>CPU Connectors</b>		Height	6.75" (17.15cm)
Monitor	2 x HDMI	Length	15.25" (38.74cm)
Keyboard & Mouse	2 x USB 2.0 Type A	Depth	8" (20.3cm)
Audio	2 x 3.5mm Mini Stereo Jack (Green)	Master Carton Qty.	6
Microphone	2 x 3.5mm Mini Stereo Jack (Pink)	<b>Weight</b>	
<b>LEDs</b>		Master Carton Wt.	7.0 lb. (3.18kg)
KVM	2 x White	Unit Pack Wt.	1.05 lb (0.48 kg)
<b>Video Resolution</b>	up to 4096 x 2160 @60Hz	Unit Wt.	0.8 lb (0.36 kg)
<b>Cable Length</b>	KVM cables: 48" (121.92cm)		
<b>Environment</b>			
Operation Temperature	0-50C (32-122 F)		
Storage Temperature	-20-60C (-4-140F)		
Humidity	0-80% RH, Non-condensing		
<b>Housing</b>			
Case	Plastic		