

GHSP8422

4K Ultra HD 2-Port Splitter with HDMI Connectors

Send high definition audio and video from a single HDMI source device to 2 separate UHD TVs, UHD displays or UHD projectors.



4K HDMI Splitter - 2-Port Ultra High Definition (UHD)

Take high definition audio and video from a single HDMI source device and direct it to 2 separate UHD TVs, UHD displays or UHD projectors using IOGEAR's new 4K 2-Port HDMI Splitter. Our latest HDMI splitter gives you the power to take any 4K Ultra High Definition or High Definition content from DVR / set-top boxes, game consoles, Blu-ray[™] players, desktop computers, media servers and other standard HDMI devices and send it to 2 displays simultaneously while maintaining the highest levels of video and audio fidelity without signal loss. IOGEAR's 4K 2-Port HDMI Splitter is an ideal solution for multi-display applications in the home, office, classroom, digital signage, house of worship, sports bar or business setting.

Highest Quality Video at Extended Distances

Deliver exceptional Cinema 4K resolutions (4096 x 2160 @ 60Hz) with crisp, 3D, and Deep Color images up to 4K 12- bit (4:2:0), or 68 billion colors, for a remarkable visual experience. The splitter extends the distance between your HDMI video sources and your HDMI displays up to 49 feet with data rates up to 10.2 Gbps, providing greater flexibility in system design.


The Splitter is perfect for multi-display applications in the home, office, and classroom, and in digital signage, houses of worship, sports bars or other business settings.

- Send audio & video from 1 HDMI® source to 2 HDMI displays
- Cinema 4K resolutions up to 4096 x 2160 @ 60Hz, (4:2:0)
- Long distance connections to 49 ft. (24 AWG)

- Dolby True HD and DTS HD Master Audio
- Supports up to 10.2 Gbps data speeds for high performance video
- Plug-n-play No software installation required
- HDCP 1.4 compatible
- All metal chassis





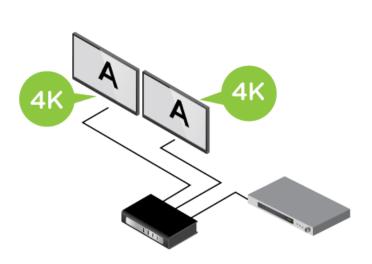

Requirements

Package Contents

- Display
- 4K TV, 4K HD Display or 4K HD Projector with HDMI Input
- Media Source
- 1 HDMI Output
- 1 x GSP8422 2-Port
- Splitter with HDMI Connectors
- 1 x Power Adapter
- 1 x HDMI Cable
- 1 x Quick Install Guide
- 1 x Warranty Card



Specifications

Function	GHSP8422	Dimensions	GHSP8422
Video connections		Unit Dimensions	
Input	1 x Female HDMI Type A 19-Pin	Height	1.0 in
Output	2 x Female HDMI Type A 19-Pin	Length	4.875 in
LEDs		Depth	3.125 in
Input	1	Unit Package Dimensions	
Output	2	Height	9.375 in
Power On	1	Length	6.25 in
Housing		Depth	2.375 in
Case	Metal	Master Carton	
Warranty	3-Year	Height	7.0 in
Video Resolution	Up to 4K@60Hz	Width	15.0 in
Environment		Depth	10.375 in
Humidity	10-80%	Master Carton Qty.	6
Operation Temperature	32~122°F	Weight	
Storage Temperature	-4~140°F	Master Carton Wt.	11.61 lb
Power		Unit Pack Wt.	3.51 lb
Voltage	5.3 V	Unit Wt.	0.68 lb
Power Consumption	6.02 W		
Connectors			
Video Input	Female HDMI Type A 19 Pin		
Video Output	Female HDMI Type A 19 Pin		