

GHSP8422

## 4K 2-Port HDMI Splitter

Send high definition audio and video from a single HDMI source device to 2 separate UHD TVs, UHD displays or UHD projectors.



### 4K HDMI Splitter - 2-Port Ultra High Definition (UHD)

Take high definition audio and video from a single HDMI source device and direct it to 2 separate UHD TVs, UHD displays or UHD projectors using IOGEAR's new 4K 2-Port HDMI Splitter. Our latest HDMI splitter gives you the power to take any 4K Ultra High Definition or High Definition content from DVR / set-top boxes, game consoles, Blu-ray™ players, desktop computers, media servers and other standard HDMI devices and send it to 2 displays simultaneously while maintaining the highest levels of video and audio fidelity without signal loss. IOGEAR's 4K 2-Port HDMI Splitter is an ideal solution for multi-display applications in the home, office, classroom, digital signage, house of worship, sports bar or business setting.

### Product Features


- Splits a single HDMI 2.0 Input to two HDMI 2.0 Outputs
- Ultra High Definition (UHD) resolutions up to 4K (4096x2160)
- Supports frame rates of up to 60Hz
- HDCP 2.2 Compliant
- Compliant with DTS Digital and Dolby Digital audio
- Supports 3D content

### Engineered to Support the Latest HDMI Standards and Copy Protection (HDCP 2.2)

IOGEAR's 4K 2-Port HDMI Splitter supports transmissions of Ultra High Definition 4K video signals (4K/60p), quality that is 4 times that of Full HD 1080p displays. Our new splitter also supports both HDMI 2.0 and HDCP 2.2; the newest standard for HDMI devices and displays, ensuring that content from the latest 4K Ultra HD devices will pass-through to any compatible display.

- Splits a single HDMI 2.0 Input to two HDMI 2.0 Outputs
- Ultra High Definition (UHD) resolutions up to 4K (4096x2160)
- Supports frame rates of up to 60Hz
- HDCP 2.2 Compliant
- Compliant with DTS Digital and Dolby Digital audio
- Supports 3D content



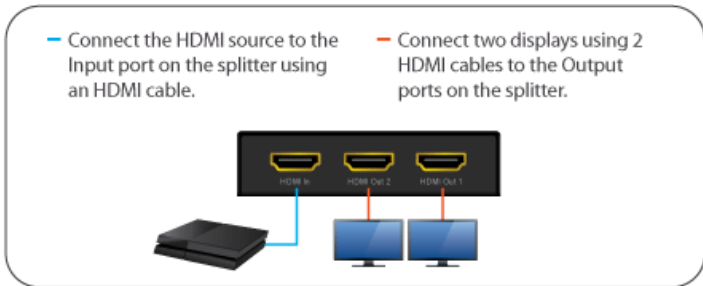

### Requirements

### Package Contents

- **Displays**
  - Up to 2 HDTVs or HD projectors with an HDMI Input
  - **Media Source**
  - 1 HDMI Output
  - **Cables\***
  - 3 HDMI cables
  - \*Cables not included
- 1 x 4K 2-Port HDMI Splitter
  - 1 x Power Adapter
  - 1 x Quick Start Guide
  - 1 x Warranty Card

## Specifications

Function	GHSP8422	Dimensions	GHSP8422
<b>Video connections</b>		<b>Unit Dimensions</b>	
Input	1 x Female HDMI Type A 19-Pin	Height	0.875" (2.2cm)
Output	2 x Female HDMI Type A 19-Pin	Depth	2.06" (5.2cm)
<b>LEDs</b>		Length	3.19" (8.1cm)
Input	1	<b>Inner Pack</b>	
Output	2	Width	4.75" (12.1cm)
<b>Housing</b>		Height	7.25" (18.4cm)
Case	Metal	Length	8.75" (22.2cm)
<b>Warranty</b>		Inner Pack Qty.	3
<b>Video Resolution</b>		<b>Unit Package Dimensions</b>	
Up to 4K@60Hz		Width	4.375" (11.1cm)
<b>Environment</b>		Height	6.375" (16.2cm)
Humidity	Operating: 10-85% RH, Storage: 5-90% RH	Depth	2.625" (6.7cm)
Operation Temperature	32~113°F (0~45°C)	<b>Master Carton</b>	
Storage Temperature	14~158°F (-10~70°C)	Width	10.25" (26.03cm)
<b>Power</b>		Height	8" (20.3cm)
Amps	2A	Depth	18" (45.7cm)
Voltage	5V	Master Carton Qty.	12
<b>Power Consumption</b>		<b>Weight</b>	
2.4W		Master Carton Wt.	10.21lb (4.64kg)
<b>Connectors</b>		Inner Pack Wt.	2.05lb (0.92kg)
Video Input	Female HDMI Type A 19 Pin	Unit Pack Wt.	0.6lb (0.28kg)
Video Output	Female HDMI Type A 19 Pin	Unit Wt.	0.25lb (0.1kg)