

GHSP8422BKIT

2-Port Cinema 4K Splitter with HDMI Cables Kit



- Send audio and video from 1 HDMI® source to 2 HDMI displays
- Cinema 4K resolutions up to 4096 x 2160 @60Hz, (4:2:0)
- Long distance connections to 49 ft. (24 AWG)
- Dolby True HD and DTS HD Master Audio
- Supports up to 10.2 Gbps data speeds for high performance video

2-Port Cinema 4K Splitter With HDMI®

Send Cinema 4K audio and video from a single HDMI source such as a set-top box, game console, Blu-ray™ player or media server or computer to two 4K displays or projectors.

Kit comes complete with all necessary HDMI cables needed for a quick and easy setup of your two monitors.


Highest Quality Video at Extended Distances

Deliver exceptional Cinema 4K resolutions (4096 x 2160 @60Hz) with crisp, 3D, and Deep Color images up to 4K 12-bit (4:2:0), or 68 billion colors, for a remarkable visual experience. The splitter extends the distance between your HDMI video sources and your HDMI displays up to 49 feet with data rates up to 10.2 Gbps, providing greater flexibility in system design.

The Splitter is perfect for multi-display applications in the home, office, and classroom, and in digital signage, houses of worship, sports bars or other business settings.

- | | |
|--|---|
| <ul style="list-style-type: none"> • Send audio and video from 1 HDMI® source to 2 HDMI displays • Cinema 4K resolutions up to 4096 x 2160 @60Hz, (4:2:0) • Long distance connections to 49 ft. (24 AWG) • Dolby True HD and DTS HD Master Audio | <ul style="list-style-type: none"> • Supports up to 10.2 Gbps data speeds for high performance video • Plug-n-play – No software installation required • Complete with all necessary HDMI cables • HDMI 1.4 & HDCP 1.4 compatible • All metal chassis • All cables included |
|--|---|



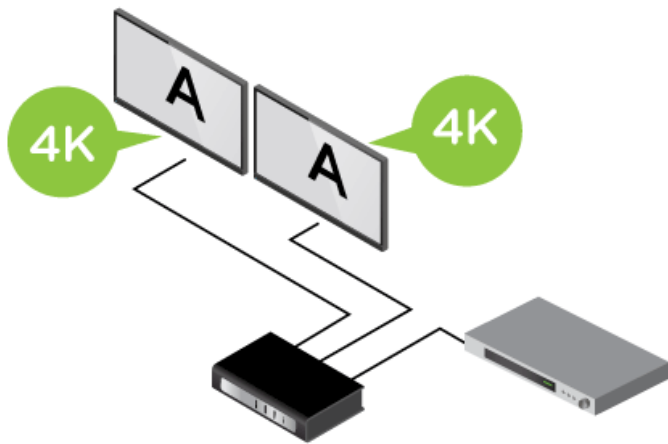

Requirements

- **Display**
- 4K TV, 4K HD Display or 4K HD Projector with HDMI Input
- **Media Source**
- 1 HDMI Output

Package Contents

- 1 x GSP8422B 2-Port HDMI Splitter
- 1 x Power Adapter
- 1 x HDMI Cable to the source
- 2 x HDMI Cables to Displays (3 ft. and 6 ft.)
- 1 x Quick Install Guide

Specifications

| Function | GHSP8422BKIT | Dimensions | GHSP8422BKIT |
|--------------------------|--|--------------------------------|--------------|
| Video connections | | Unit Dimensions | |
| Input | HDMI Type A Female | Height | 1.0 in |
| Output | HDMI Type A Female | Depth | 3.125 in |
| Power Consumption | 6.02 W | Length | 4.875 in |
| Power | | Unit Package Dimensions | |
| Voltage | 5.3VDC | Height | 9.375 in |
| Video Resolution | Up to 4096 x 2160 / 3840 x 2160 @ 60Hz (4:2:0) | Depth | 2.375 in |
| Environment | | Length | 6.25 in |
| Storage Temperature | -4°F ~ 140°F | Physical Properties | |
| Operation Temperature | 32°F ~ 122°F | Unit Weight | 0.68 lb |
| Humidity | 0 ~ 80% | Unit Weight with package | 4.11 lb |
| Video Streaming | Max Data Rate 10.2 Gbps | | |
| Data Rate | Max Pixel Clock 340 MHz | | |
| Power Adapter | 5.3V/2.4A | | |
| Housing | | | |
| Case | Metal | | |
| Display Output | | | |
| HDMI | HDMI 1.4 HDCP compatible | | |