

4K Ultra HD 4-Port Splitter with HDMI Connectors

- Send audio & video from 1 HDMI source to 4 HDMI displays
- Cinema 4K resolutions up to 4096 x 2160 @ 60Hz, (4:2:0)
- Long distance connections to 49 ft. (24 AWG)
- Dolby True HD and DTS HD Master Audio
- Supports up to 10.2 Gbps data speeds for high performance video



4K HDMI Splitter - 4-Port Ultra High Definition (UHD)

Take high definition audio and video from a single HDMI source device and direct it to 4 separate UHD TVs, UHD displays or UHD projectors using IOGEAR's new 4K 4-Port Video Splitter. Our latest video splitter gives you the power to take any 4K Ultra High Definition or High Definition content from DVR / set-top boxes, game consoles, Blu-ray[™] players, desktop computers, media servers and other standard HDMI devices and send it to 4 displays simultaneously while maintaining the highest levels of video and audio fidelity without signal loss. IOGEAR's 4K 4-Port Video Splitter is an ideal solution for multi-display applications in the home, office, classroom, digital signage, house of worship, sports bar or business setting.

Highest Quality Video at Extended Distances


Deliver exceptional Cinema 4K resolutions (4096 x 2160 @ 60Hz) with crisp, 3D, and Deep Color images up to 4K 12- bit (4:2:0), or 68 billion colors, for a remarkable visual experience. The splitter extends the distance between your HDMI video sources and your HDMI displays up to 49 feet with data rates up to 10.2 Gbps, providing greater flexibility in system design.

- Send audio & video from 1 HDMI source to 4 HDMI displays
- Cinema 4K resolutions up to 4096 x 2160 @ 60Hz, (4:2:0)
- Long distance connections to 49 ft. (24 AWG)
- Dolby True HD and DTS HD Master Audio

- Supports up to 10.2 Gbps data speeds for high performance video
- Plug-n-play No software installation required
- HDCP 1.4 compatible
- Rack Mountable
- All metal chassis





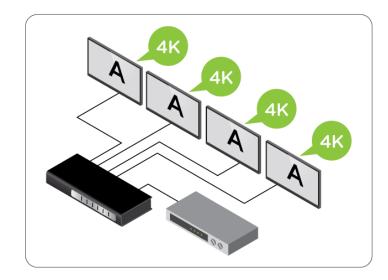

Requirements

Package Contents

- Video source with HDMI output
- Display with HDMI input
- 1 x GSP8424B 4-Port Splitter with HDMI
- Connectors1 x Power Adapter
- 1 x HDMI Cable
- 1 x Mounting Kit
- 1 x Quick Install Guide



Specifications

Function	GHSP8424	Dimensions	GHSP8424
Video connections		Unit Dimensions	
Input	HDMI Type A Female	Height	0.875" (2.2cm)
Output	HDMI Type A Female	Length	4.875" (12.4cm)
Video Resolution	4096 x 2160 @ 60Hz	Depth	2.06" (5.2cm)
Video Streaming	Max Data Rate 10.2 Gbps	Inner Pack	
Power Consumption	6.02W	Height	7.25" (18.4cm)
Power Adapter	5.3V/2.4A	Length	8.75" (22.2cm)
Environment		Width	4.75" (12.1cm)
Operation Temperature	32~122°F (0~50°C)	Inner Pack Qty.	3
Storage Temperature	-4F ~ 140F (-20 - 60C)	Unit Package Dimensions	
Humidity	0 - 80% RH, Non-Condensing	Height	6.375" (16.2cm)
Warranty	3 -Year	Width	4.375" (11.1cm)
		Depth	2.625" (6.7cm)
		Master Carton	
		Height	8" (20.3cm)
		Width	10.25" (26.03cm)
		Depth	18" (45.7cm)
		Master Carton Qty.	12
		Weight	
		Master Carton Wt.	10.2lb (4.64kg)
		Inner Pack Wt.	2.35lb (1.08kg)
		Unit Pack Wt.	0.7lb (0.32kg)
		Unit Wt.	0.35lb (0.16kg)