

GHSP8424

4K Ultra HD 4-Port Splitter with HDMI Connectors

Send high definition audio and video from a single HDMI source device to 4 separate UHD TVs, UHD displays or UHD projectors.



4K HDMI Splitter - 4-Port Ultra High Definition (UHD)

Take high definition audio and video from a single HDMI source device and direct it to 4 separate UHD TVs, UHD displays or UHD projectors using IOGEAR's new 4K 4-Port Video Splitter. Our latest video splitter gives you the power to take any 4K Ultra High Definition or High Definition content from DVR / set-top boxes, game consoles, Blu-ray™ players, desktop computers, media servers and other standard HDMI devices and send it to 4 displays simultaneously while maintaining the highest levels of video and audio fidelity without signal loss. IOGEAR's 4K 4-Port Video Splitter is an ideal solution for multi-display applications in the home, office, classroom, digital signage, house of worship, sports bar or business setting.

Product Features


- Splits a single HDMI Input to four HDMI Outputs
- Ultra High Definition (UHD) resolutions up to 4K (4096x2160)
- Supports frame rates of up to 60Hz
- HDCP 2.2 Compliant
- Compliant with DTS Digital and Dolby Digital audio
- Supports 3D content

Engineered to Support the Latest HDMI Standards and Copy Protection (HDCP 2.2)

IOGEAR's 4K 4-Port HDMI Splitter supports transmissions of Ultra High Definition 4K video signals (4K/60p), quality that is 4 times that of Full HD 1080p displays. Our new splitter also supports HDCP 2.2; the newest standard for HDMI devices and displays, ensuring that content from the latest 4K Ultra HD devices will pass-through to any compatible display.

- | | |
|---|---|
| <ul style="list-style-type: none"> • Splits a single HDMI Input to four HDMI Outputs • Ultra High Definition (UHD) resolutions up to 4K (4096x2160) | <ul style="list-style-type: none"> • Supports frame rates of up to 60Hz • HDCP 2.2 Compliant • Compliant with DTS Digital and Dolby Digital audio • Supports 3D content |
|---|---|



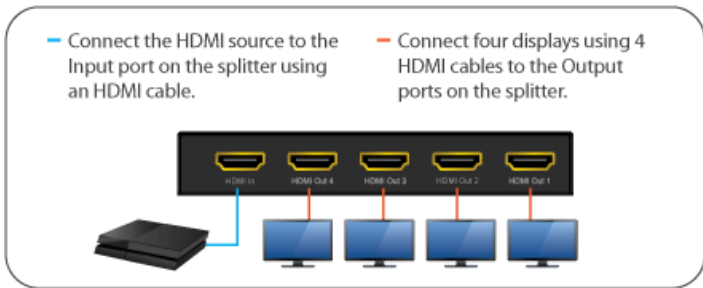

Requirements

- **Displays**
- Up to 4 HDTVs or HD projectors with an HDMI Input
-
- **Media Source**
- 1 HDMI Output
-
- **Cables***
- 5 High-Speed HDMI cables
-
- *Cables not included

Package Contents

- 1 x 4K 4-Port HD Splitter
- 1 x Power Adapter
- 1 x Quick Start Guide
- 1 x Warranty Card

Specifications

Function		Dimensions	
GHSP8424		GHSP8424	
Video connections		Unit Dimensions	
Input	1 x Female HDMI Type A 19-Pin	Height	0.875" (2.2cm)
Output	4 x Female HDMI Type A 19-Pin	Depth	2.06" (5.2cm)
LEDs		Length	4.875" (12.4cm)
Input	1	Inner Pack	
Output	4	Width	4.75" (12.1cm)
Housing		Height	7.25" (18.4cm)
Case	Metal	Length	8.75" (22.2cm)
Warranty		Inner Pack Qty.	3
Video Resolution		Unit Package Dimensions	
Up to 4K@60Hz		Width	4.375" (11.1cm)
Environment		Height	6.375" (16.2cm)
Humidity	Operating: 10-85% RH, Storage: 5-90% RH	Depth	2.625" (6.7cm)
Operation Temperature	32~113°F (0~45°C)	Master Carton	
Storage Temperature	14~158°F (-10~70°C)	Width	10.25" (26.03cm)
Power		Height	8" (20.3cm)
Amps	2A	Depth	18" (45.7cm)
Voltage	5V	Master Carton Qty.	12
Power Consumption		Weight	
2.4W		Master Carton Wt.	10.2lb (4.64kg)
Connectors		Inner Pack Wt.	2.35lb (1.08kg)
Video Input	Female HDMI Type A 19 Pin	Unit Pack Wt.	0.7lb (0.32kg)
Video Output	Female HDMI Type A 19 Pin	Unit Wt.	0.35lb (0.16kg)