

GHSP8424B

4-Port Cinema 4K Splitter with HDMI connectors



- Send audio & video from 1 HDMI source to 4 HDMI displays
- Cinema 4K resolutions up to 4096 x 2160 @ 60Hz, (4:2:0)
- Long distance connections to 49 ft. (24 AWG)
- Dolby True HD and DTS HD Master Audio
- Supports up to 10.2 Gbps data speeds for high performance video

4-Port Cinema 4K Splitter With HDMI®


Send Cinema 4K audio and video from a single HDMI source such as a set-top box, game console, Blu-ray™ player or media server or computer to four 4K displays or projectors.

Highest Quality Video at Extended Distances

Deliver exceptional Cinema 4K resolutions (4096 x 2160 @ 60Hz) with crisp, 3D, and Deep Color images up to 4K 12-bit (4:2:0), or 68 billion colors, for a remarkable visual experience. The splitter extends the distance between your HDMI video sources and your HDMI displays up to 49 feet with data rates up to 10.2 Gbps, providing greater flexibility in system design.

- | | |
|--|--|
| <ul style="list-style-type: none"> • Send audio & video from 1 HDMI source to 4 HDMI displays • Cinema 4K resolutions up to 4096 x 2160 @ 60Hz, (4:2:0) • Long distance connections to 49 ft. (24 AWG) • Dolby True HD and DTS HD Master Audio | <ul style="list-style-type: none"> • Supports up to 10.2 Gbps data speeds for high performance video • Plug-n-play – No software installation required • HDCP 1.4 compatible • Rack Mountable • All metal chassis |
|--|--|



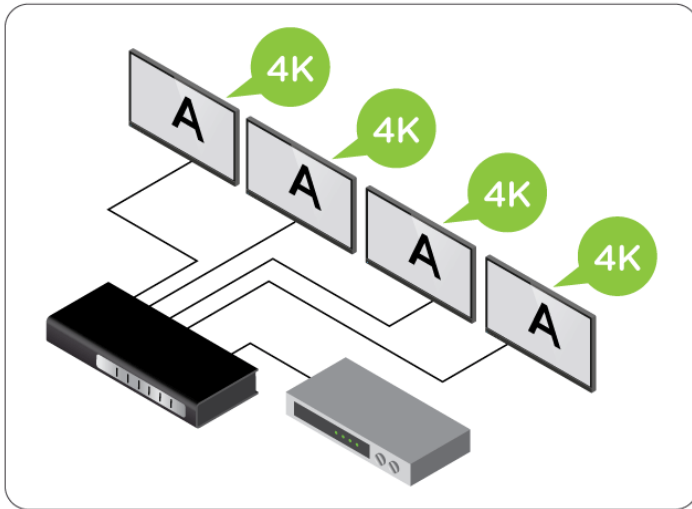

Requirements

- Video source with HDMI output
- Display with HDMI input

Package Contents

- 1 x GSP8424B 4-Port Splitter with HDMI Connectors
- 1 x Power Adapter
- 1 x HDMI Cable
- 1 x Mounting Kit
- 1 x Quick Install Guide

Specifications

| Function | GHSP8424B | Dimensions | GHSP8424B |
|--------------------------|----------------------------|--------------------------------|-----------|
| Video connections | | Unit Dimensions | |
| Input | HDMI Type A Female | Height | 0.98 in |
| Output | HDMI Type A Female | Length | 7.87 in |
| Video Resolution | 4096 x 2160 @ 60Hz | Depth | 3.15 in |
| Video Streaming | Max Data Rate 10.2 Gbps | Unit Package Dimensions | |
| Power Consumption | 6.02W | Height | 6.25 in |
| Power Adapter | 5.3V/2.4A | Width | 9.375 in |
| Environment | | Depth | 2.25 in |
| Operation Temperature | 32~122°F (0~50°C) | Master Carton | |
| Storage Temperature | -4F ~ 140F (-20 - 60C) | Height | 7.125 in |
| Humidity | 0 - 80% RH, Non-Condensing | Width | 15.125 in |
| Warranty | 3 - Years | Depth | 10.50 in |
| | | Master Carton Qty. | 6 |
| | | Weight | |
| | | Master Carton Wt. | 12.70 lb |
| | | Unit Wt. w/accessories | 1.90 lb |
| | | Unit Wt. | 1.05 in |