

GHSW8441

True 4K 4-Port Switcher with HDMI Connection

- Connect and switch between 4 HDMI® sources on 1 HDMI display
- True 4K resolutions to 4096 x 2160 @ 60Hz (4:4:4)
- Distribute uncompressed audio formats
- Flexible control via push-button, IR remote & RS-232 serial control
- Bi-directional RS-232 support for universal remotes & touch panels



4-Port True 4K Switch With HDMI®

The IOGEAR 4-Port True 4K Switch with HDMI connection offers smooth, quick switching between four HDMI video sources such as a computer, Blu-ray or media player, and cable or satellite receivers and a single HDMI display. Send crystal clear, Cinema 4K video reaching true 4K resolutions to 4096 x 2160 @ 60Hz with 4:4:4 Chroma subsampling, High Dynamic Range (HDR) and uncompressed audio for any variety of uses including home theater, in lobbies and conference rooms and for digital signage.


Flexible Source Switching

Easily switch between each source automatically or manually. Utilize one of three Switch Modes and auto-cycle through your sources with smooth video transitions to display a variety of content. Manually switch between sources with the included IR remote control, or select a source via front panel push-buttons in settings where a remote control is not needed.

- Connect and switch between 4 HDMI® sources to 1 HDMI display
- True 4K resolutions to 4096 x 2160 @ 60Hz (4:4:4)
- Cascade up to 3 levels (64 source ports)
- Distribute uncompressed audio formats
- Flexible control via push-button, IR remote control
- Auto-Switch mode detects & selects new HDMI port connections
- Supports high-speed data rates up to 18 Gbps
- HDCP 2.2 Compliant
- CEC Compliant



Switch between four HDMI video sources such as a computer, Blu-ray or media player, and cable or satellite receivers and a single HDMI display

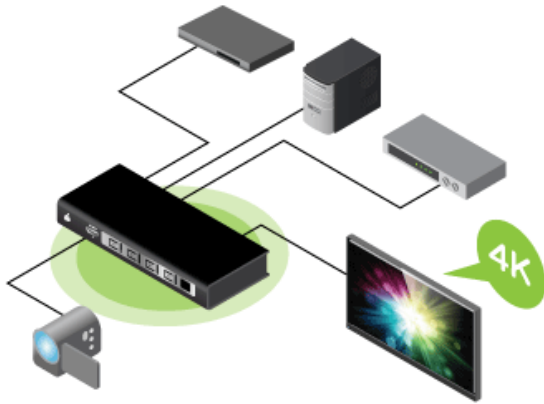

Requirements

- HDMI source
- HDMI Display or projector

Package Contents

- 1 x GHSW8441 4-Port 4K Switch with HDMI Connectors
- 1 x Power Adapter
- 1 x IR Remote Control Unit
- 1 x HDMI Cable
- 1 x User Manual
- 1 x Warranty Card

Specifications

Function	GHSW8441
Video connections	
Input	HDMI
Output	HDMI
Display Output	
HDMI	HDCP 2.2
Connectors	
RS-232	1 x DB-9 Female
Environment	
Humidity	0-80%
Operation Temperature	32~104°F (0~40°C)
Storage Temperature	-4F ~ 140F (-20 - 60C)
Housing	
Case	Metal
Power Adapter	5V/2A
Power Consumption	5W
Video Resolution	4096 x 2160 @ 60Hz (4:4:4)
Video Streaming	18 Gbps (6Gbps per lane)
Warranty	3 - Years

Dimensions	GHSW8441
Unit Dimensions	
Height	0.98 in
Length	7.87 in
Depth	3.23 in
Unit Package Dimensions	
Height	9.40 in
Length	6.30 in
Depth	2.32 in
Master Carton	
Height	10.04 in
Width	14.89 in
Depth	7.17 in
Master Carton Qty.	6
Weight	
Master Carton Wt.	11.55 lb
Physical Properties	
Unit Weight	1.03 lb
Unit Weight with package	1.83 lb