



GIC220U

Hi-Speed USB 2.0 PCI card

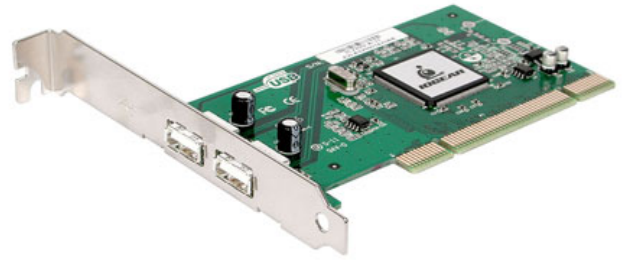

IOGEAR brings you the first Two-Port USB 2.0 PCI Card (GIC220U). USB 2.0 will move data at a blazing rate of 480 Mbps (Megabits per second), and is fully backward compatible with the first generation of USB devices. With the increase in speed, USB 2.0 offers enhanced functionality, allowing more devices to share the increased bandwidth. The new USB 2.0 PCI card will allow you to take full advantage of the USB 2.0 technology on your current USB 1.1 systems.

- Transfer digital movies, photos, music and more at speed up to 480 Mbps
- 40 times faster than USB 1.1
- Transfer 200MB in under 30 seconds
- Supports Mac OS 8.6 to 9.2 (USB 1.1 only), OS X.0.3 (USB 2.0); Windows® 98SE, 2000, ME, XP
- 2 External Type A USB Ports
- Hot Swappable - Plug-n-Play
- Works in any available PCI slot
- Hassle free, easy software setup and configuration. No jumper or ID setting
- Fully backwards compatible with USB 1.1
- Hi-Speed SUB 2.0 bus allows the sharing of the storage peripheral among many PCs through optional high speed USB 2.0 hub devices
- Easy to configure Hi-Speed bus for HDD storage, connectivity and more
- PC Power Management v2.2 compliant
- 3 Year Limited Warranty

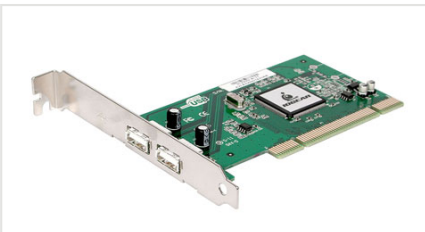

Requirements

For PC Users

- Windows® 98SE, 2000, ME, XP
- 300 Mhz or greater
- Available PCI slot

For MAC Users

- Power Mac G3 Blue-and-White or greater (G3 Biege and all Mac Clone not supported)
- OS 8.6 to 9.2 (USB 1.1 support only)
- OS X.0.3 or greater (USB 2.0 support)
- Available PCI slot

Package Contents

- GIC220U - 2 Port USB 2.0 PCI Card
- Warranty Card
- Installation CD
- Users Manual

Specifications

Function	GIC220U	Dimensions	GIC220U
Ports	2 Downstream	Unit Dimensions	
Operating Temperature	20 to 50 degrees (Celsius)	Height	4.75 in. (12.06 cm.)
Storage Temperature	0 to 70 degrees (Celsius)	Depth	4.75 in. (12.0 cm.)
Operating System Support	Windows98SE, 2000, ME, XP, MAC OS 8.6 to 9.2 (USB 1.1 support only), OS X.0.3 (USB 2.0 support)	Width	0.75 in. (1.9 cm.)
USB Specification	USB 1.1 and 2.0 compliant	Unit Package Dimensions	
Transfer Rate	480 Mbps	Height	6.5 in.
Humidity	20-80% RH, (Non Condensing)	Width	9.5 in. (24.1cm.)
		Depth	2.5 in.
		Master Carton	
		Height	14 in.
		Width	19.75 in.
		Depth	16 in.
		Master Carton Qty.	24
		Weight	
		Master Carton Wt.	17.55 lb.
		Unit Pack Wt.	0.6 lb.