

GTD300

Thunderbolt 3 Travel Dock

- 4-Port dock expands laptop/tablet ports on-the-go
- Ultra-fast Thunderbolt 3 data rates to 40 Gbps
- Connect a single or dual 4K displays* (HDMI & DisplayPort)
- Enjoy high definition audio through the HDMI port
- Compact Design with hideaway cable compartment



Harness the Full Potential of Thunderbolt 3

Using a single Thunderbolt 3 cable, the IOGEAR Thunderbolt 3 Travel Dock conveniently goes where you do. This compact powerhouse connects single or dual true 4K (4096 x 2160 @60Hz) displays, supports high definition audio, wired Gigabit Ethernet and offers a USB-A 3.0 port to accommodate your most demanding computing needs while on-the-go. Experience the full potential of Thunderbolt 3 technology with its high performance, ease of use and unprecedented speed making the IOGEAR Travel Dock a truly limitless docking solution.

Dual 4K Resolution Displays

The Travel Dock supports impressive, Cinema 4K quality on a single DisplayPort or HDMI-enabled monitor to 4096 x 2160 @60Hz for enhanced enjoyment while watching videos, playing games, working and creating. Double your Cinema 4K viewing area by connecting both a DisplayPort and HDMI display for crystal clear images and video quality across two screens.

Ultra-Fast Speeds


With its phenomenal bandwidth reaching up to 40 Gbps, the IOGEAR Thunderbolt 3 Travel Dock transfers large files in seconds and a full 4K movie in under 30 seconds. Now move your data up to 8 times faster than USB 3.0, 80 times faster than USB 2.0, and 50 times faster than Firewire 800! With speed like this, you now have everything you need to eliminate any connectivity obstacles to building the ultimate workstation setup.

- 4-Port dock expands laptop/tablet ports on-the-go
- Ultra-fast Thunderbolt 3 data rates to 40 Gbps
- Connect a single 5K or dual [4K@60Hz](#) displays* (HDMI & DisplayPort)
- Enjoy high definition audio through the HDMI port

- Compact Design with hideaway cable compartment
- 1x USB-A port offers data speeds to 5 Gbps with Wake-on-USB
- 1x Gigabit Ethernet network data port

*Maximum resolution is dependent on the capability of the connected display and computer source.



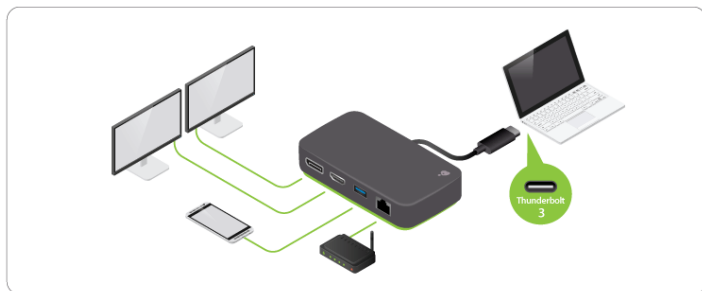

Requirements

- Thunderbolt 3 enabled computer
- Windows 7/8/8.1/10
- Mac OS X 10.7+

Package Contents

- GTD300 x 1
- Warranty Card x 1

Many Thunderbolt 3 PCs require software and firmware updates to ensure functionality with Thunderbolt 3 adapters and docking stations.

<https://thunderbolttechnology.net/updates>

Specifications

Function	GTD300	Dimensions	GTD300
Upstream Port		Unit Dimensions	
Thunderbolt	Thunderbolt 3 (40Gbps)	Height	4.06" (10.3cm)
Downstream Port		Length	2.2" (5.6cm)
USB-A	1x USB 3.0 (Up to 5Gbps, supports Wake-on-USB)	Depth	0.91" (2.3cm)
DisplayPort	1x DisplayPort 1.2 spec (Up to 4096X2160@60Hz)	Inner Pack	
Ethernet	1x Ethernet 1Gbps (Supports Wake-on-LAN)	Height	5.51" (14cm)
HDMI	1x HDMI 2.0 spec (4096X2160 @ 60Hz)	Length	11.02" (28cm)
Audio		Width	7.09" (18cm)
Audio Output	Supports up to 8-channel LPCM, compressed audio (AC-3, DTS) and HBR audio formats; up to 192kHz frame rate and up to 24-bit sample size	Inner Pack Qty.	6
Data Rate		Unit Package Dimensions	
	Up to 40Gbps	Height	5.71" (14.5cm)
Environment		Width	5.31" (13.5cm)
Humidity	-20~85°C	Depth	1.73" (4.4cm)
Operation Temperature	0°C ~40°C	Master Carton	
Operating System Requirements		Height	16.54" (42cm)
Mac	Mac OS X 10.7+	Width	23.62" (60cm)
Windows	Windows® 10	Depth	12.6" (32cm)
Power		Master Carton Qty.	48
Amps	Max. 3A	Weight	
Voltage	5V	Master Carton Wt.	24.66lb (11.19kg)
Protocols		Inner Pack Wt.	2.78lb (1.26kg)
	HDMI port: HDCP 2.2, EDID reading	Unit Pack Wt.	0.4lb (0.18kg)
		Unit Wt.	0.3lb (0.14kg)