

GUC2015V

## USB 2.0 External VGA Video Card




### USB to VGA - External USB 2.0 to VGA Video Card

The IOGEAR's USB 2.0 External VGA Video Card allows you to easily connect an extra monitor to your desktop or laptop's USB port for a seamless dual display set up. The connected monitor can be configured to either mirror your primary screen, or extend it across an additional display allowing visibility of more applications at the same time. The USB to VGA video card includes specialized software that is easy to install and guarantees little difference in performance between a directly connected screen and a screen connected through the USB 2.0 External VGA Video Card.

- Easily connect additional VGA monitors via USB 2.0 ports
  - Extend your desktop, or mirror content on two displays
  - Add up to six\* external VGA video cards via USB 2.0 ports
  - Support resolutions of up to 1280 x 1024 at 32-bit color
  - No need to open cases. Great for laptops or leasing computers
  - Bus Powered - No external power supply needed
  - Supports usage through powered KVMP's or USB hubs
- Office Use:
    - View large spreadsheets across two screens with display continuity
    - Multitask more effectively without overlapping windows
    - Open attachments on one screen while reading the e-mail on the other
  - Graphic Use:
    - Use second display for pallets & tools
  - Data Entry Use:
    - Type documents on one screen while viewing reference material on the other
  - Wall Street:
    - Use a notebook for viewing multiple screens
    - View charts and live data at the same time

\*Requires six USB 2.0 ports. Not recommended to connect with USB hubs. The possibilities with the IOGEAR DVI display adapter are endless.



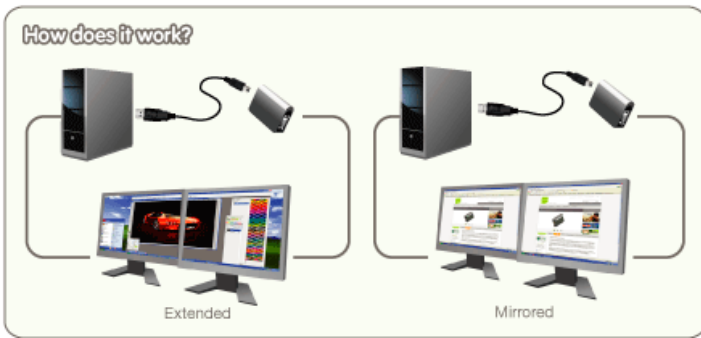

**Requirements**

- Windows<sup>®</sup> 10, Windows<sup>®</sup> 8.1 (32-bit / 64-bit), Windows<sup>®</sup> 8 (32-bit / 64-bit), Windows<sup>®</sup> 7 (32-bit / 64-bit), Windows Vista<sup>®</sup>, Windows XP<sup>®</sup>
- Intel based Mac OS X 10.4 and above
- Available USB 2.0 port (not compatible with USB 1.x)

**Package Contents**

- 1 - USB to SXGA Adapter
- 1 - Quick Start Guide
- 1 - Driver CD
- 1- 4ft USB 2.0 Cable

## Specifications

Function	GUC2015V	Dimensions	GUC2015V
<b>Power Consumption</b>	5V	<b>Unit Dimensions</b>	
<b>Video Resolution</b>	1280 x 1024	Height	2.3 Inch
<b>Ports</b>	1 Female VGA / 1 USB 2.0 Type mini-B	Length	3.375 Inch
<b>Operating Temperature</b>	32 ~ 122 ° F ( 0 ~ 50 ° C)	Width	0.75 Inch
<b>Storage Temperature</b>	14 ~ 158 ° F ( -10 ~ 70 ° C)	<b>Inner Pack</b>	
<b>Operating System Support</b>	Windows XP®, Windows Vista®, Windows® 7, Windows® 8, Windows® 8.1, Apple Mac OS X 10.4/10.5/10.6.10.7 (Intel-based)	Height	17 in. (43 cm)
<b>USB Specification</b>	2.0 compliant	Length	7 in. (17.8 cm)
<b>Humidity</b>	10-90% RH, (Non Condensing)	Width	16.5 in. (42 cm)
<b>Power Connections</b>	Optional Power Port	Inner Pack Qty.	12
<b>Connectors</b>		<b>Unit Package Dimensions</b>	
USB	1	Height	7.9 in (20 cm)
Video Output	1	Width	7.9 in (20 cm)
<b>Color Depth</b>	32-bit true color	Depth	2 in. (5.1 cm)
		<b>Master Carton</b>	
		Height	17.72 in (45 cm)
		Width	17.13 in (43.5 cm)
		Depth	15.16 in (38.5 cm)
		Master Carton Qty.	24
		<b>Weight</b>	
		Master Carton Wt.	19 lbs.
		Unit Pack Wt.	0.75 lb
		Unit Wt.	0.25 lb