

GUC3CDP

USB Type-C to DisplayPort Adapter



USB-C to DisplayPort Adapter

IOGEAR's new USB Type-C to DisplayPort adapter is the ideal hardware solution to convert a USB-C connection to a DisplayPort video output. This adapter gives you the ability to connect your USB-C based device like the Apple® MacBook®, Google® Chromebook Pixel™ and the Nokia™ N1 Tablet to any DisplayPort based display, projector or HDTV.


USB Type-C - The Next Break Through in Connectivity

USB-C is the latest advancement in the consumer electronics industry for device connectivity. Supporting a universal connectivity standard, USB-C unites all of your core functions into one powerful port. Thanks to its versatile design, compact footprint and unparalleled performance, USB-C connections are featured on next generation ultra-portable devices like the Apple® MacBook™, Google® Chromebook Pixel™ and Asus® ZenPad tablets.

- Connect your USB Type-C based Notebook, Ultrabook or Tablet to a DisplayPort based display or projector
- Compatible with the latest USB Type-C based desktops, notebooks and tablets including Apple® MacBook®, Chromebook™ Pixel and the Nokia N1 tablet
- Supports Video Resolutions of up to 3840 x 2160
- Reversible USB Type-C connector ensures proper operation regardless of how the adapter is connected
- Compliant with DisplayPort Specification 1.2 Alternate Mode
- USB Bus Powered - No external power adapter necessary
- Supports Plug-N-Play; No drivers or software installation necessary
- USB 3.1 Gen 1 Compliant
- HDCP Compliant
- Works with the new USB-C iPad Pro under mirror-mode



How does it work?

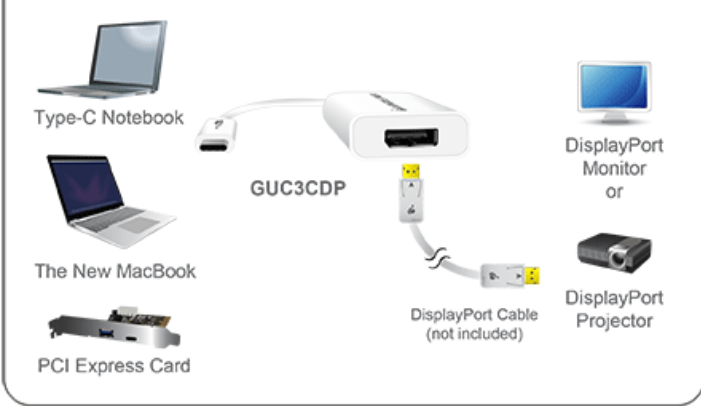

Requirements

Package Contents

- Input
 - 1 x USB Type-C Source
 - Output
 - 1 x Projector or Display with DisplayPort Port
- 1 x USB Type-C to DisplayPort Adapter

Specifications

| Function | GUC3CDP | Dimensions | GUC3CDP |
|---------------------------|--------------------------------|--------------------------------|------------------|
| Connectors (Input) | USB Type-C (Male) | Unit Dimensions | |
| Video connections | | Height | 1.5" (3.8cm) |
| Output | DisplayPort (Female) | Depth | 0.625" (1.6cm) |
| Video Resolution | Up to 3840x2160 @ 30fps | Length | 7.25" (18.4cm) |
| Data Rate | Up to 5.4Gbps (Per Lane) | Inner Pack | |
| USB Specification | USB 3.1 Gen 1 | Width | 4.375" (11.1cm) |
| Power Supply | USB Bus-Powered | Height | 3.75" (9.5cm) |
| Environment | | Length | 10.75" (27.3cm) |
| Humidity | 5% to 90% RH (No Condensation) | Inner Pack Qty. | 12 |
| Operation Temperature | 32°-113°F (0°- 45°C) | Unit Package Dimensions | |
| Storage Temperature | 14°-176°F (-10°- 80°C) | Width | 4" (10.2cm) |
| Warranty | Limited Lifetime | Height | 10.5" (26.7cm) |
| | | Depth | 0.625" (1.6cm) |
| | | Master Carton | |
| | | Width | 9.625" (24.4cm) |
| | | Height | 8.125" (20.6cm) |
| | | Depth | 11.375" (28.9cm) |
| | | Master Carton Qty. | 48 |
| | | Weight | |
| | | Master Carton Wt. | 4.45lb (2.02kg) |
| | | Inner Pack Wt. | 0.95lb (0.42kg) |
| | | Unit Pack Wt. | 0.05lb (0.02kg) |
| | | Unit Wt. | 0.05lb (0.02kg) |