

GUC3CDVI

USB Type-C to DVI Adapter



USB-C to DVI Adapter

IOGEAR's new USB Type-C to DVI adapter is the ideal hardware solution to convert a USB-C connection to a DVI video output. This gives you the ability to connect your USB-C based device like the Apple® MacBook®, Google® Chromebook Pixel™ and the Nokia™ N1 Tablet to any DVI based display or projector.

USB-C - The Next Break Through in Connectivity

USB-C is the latest advancement in the consumer electronics industry for device connectivity. Supporting a universal connectivity standard, USB-C unites all of your core functions into one powerful port. Thanks to its versatile design, compact footprint and unparalleled performance, USB-C connections are featured on next generation ultra-portable devices like the Apple® MacBook™, Google® Chromebook Pixel™ and Asus® ZenPad tablets.


DVI High-Resolution Video Support

The GUC3CDVI USB Type-C to DVI adapter supports video resolutions of up to 2560x1440 (WQHD) and Full HD 1080p video playback. The result is crystal clear imagery when needing to display presentations on a projector, reviewing documents on a high-resolution desktop monitor or playing back high-definition video on an HDTV.

- Connect your USB Type-C based Notebook, Ultrabook or Tablet to a DVI based display or projector
- Compatible with the latest USB Type-C based desktops, notebooks and tablets including Apple® MacBook®, Chromebook™ Pixel and the Nokia N1 tablet
- Supports Video Resolutions of up to 2560 x 1440* 1920 x 1080**
- Reversible USB Type-C connector ensures proper operation regardless of how the adapter is connected
- Compliant with DisplayPort Specification 1.2 Alternate Mode
- USB Bus Powered - No external power adapter necessary
- Supports Plug-N-Play; No drivers or software installation necessary
- USB 3.1 Gen 1 Compliant
- HDCP Compliant
- *When used with a standard DVI Monitor, Maximum resolution of 1920 x 1080 will be displayed
- **Some Laptop and DVI monitor combination may not reach 1920 x 1080 video resolution
- **Apple Cinema Display (30-inch DVI) may show maximum resolution of 1280 x 800



How does it work?

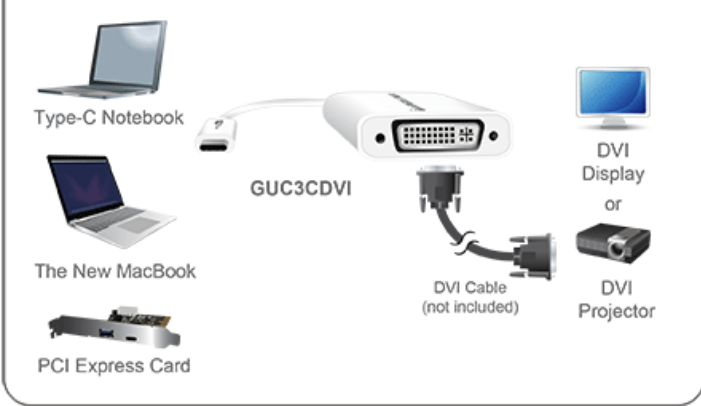

Requirements

Package Contents

- | | |
|---|---|
| <ul style="list-style-type: none">• Input<ul style="list-style-type: none">1 x USB Type-C Source• Output<ul style="list-style-type: none">1 x Projector or Display with DVI Port | <ul style="list-style-type: none">• 1 x USB Type-C to DVI Adapter |
|---|---|

Specifications

Function	GUC3CDVI
Connectors (Input)	USB Type-C (Male; 24-Pin)
Video connections	
Output	Dual-Link DVI-I (Female; 24-Pin)
Video Resolution	Up to 2560 x 1440*
Data Rate	Up to 5.4Gbps (Per Lane)
USB Specification	USB 3.1 Gen 1
Power Supply	USB Bus-Powered
Environment	
Humidity	10% to 85% RH (No Condensation)
Operation Temperature	32°~113°F (0°~ 45°C)
Storage Temperature	14°~176°F (-10°~ 80°C)
Warranty	Limited Lifetime

Dimensions	GUC3CDVI
Unit Dimensions	
Height	1.75" (4.4cm)
Depth	0.625" (1.6cm)
Length	7.375" (18.7cm)
Inner Pack	
Width	4.375" (11.1cm)
Height	3.625" (9.2cm)
Length	10.75" (27.3cm)
Inner Pack Qty.	12
Unit Package Dimensions	
Width	4" (10.2cm)
Height	10" (25.4cm)
Depth	0.625" (1.6cm)
Master Carton	
Width	9.5" (24.1cm)
Height	8" (20.3cm)
Depth	11.5" (29.2cm)
Master Carton Qty.	48
Weight	
Master Carton Wt.	4.7lb (2.14kg)
Inner Pack Wt.	1.0lb (0.46kg)
Unit Pack Wt.	0.1lb (0.04kg)
Unit Wt.	0.05lb (0.02kg)