

GUC3CHD22

USB-C to Dual 4K Adapter

- Connect a USB-C laptop to two 4K HDMI displays
- Small, compact design simplifies portability
- Supports dual 4K displays @30Hz (3840 x 2160)
- Enjoy High Definition audio via HDMI
- Aluminum housing provides durability for travel



Single USB-C Port, Dual 4K Displays

Connect the IOGEAR USB-C to Dual 4K HDMI Adapter to expand your USB-C enabled laptop for a ready-connection to two 4K HDMI displays.

Amplify Your High-Resolution Experience

Enjoy high-quality photos and 4K Ultra HD video @ 30Hz (3840 x 2160) and utilize the full graphics performance of your MacBook, iMac or other USB-C or Thunderbolt 3 computer. Listen to High Definition audio through the HDMI connection as you watch movies or videos.


Portable Performance

The adapter's durable aluminum alloy housing and its portable compact size make it the ideal laptop companion. Whether you're in the office or on-the-go, you can quickly connect to any HDMI TV, monitor or projector for superior images rivaling desktop graphics workstations.

- Connect a USB-C laptop to two 4K HDMI displays
- Small, compact design simplifies portability
- Supports dual 4K displays @30Hz (3840 x 2160)
- Enjoy High Definition audio via HDMI
- Aluminum housing provides durability for travel
- Compatible with Thunderbolt 3-enabled computers
- USB bus-powered adapter- No power supply needed
- Windows and Mac compatible
- HDMI 2.0 compliant
- Works with the new USB-C iPad Pro under mirror-mode

Disclaimer on Functional Diagram: MST-enabled systems support extended mode; without MST, adapter operates in mirror mode only. Mac OS does not support MST



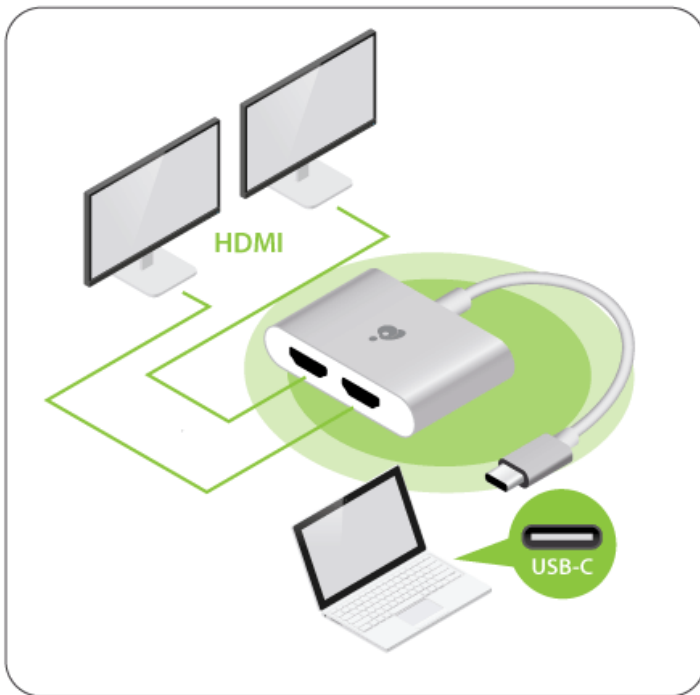

Requirements

Package Contents

- | Requirements | Package Contents |
|--|---|
| <ul style="list-style-type: none">• USB-C (Thunderbolt 3 compatible) device with DP Alt Mode support• Windows 7/8/8.1/10• Mac OS X 10.7+ | <ul style="list-style-type: none">• 1 x GUC3CHD22• 1 x Warranty Card |

Specifications

Function	GUC3CHD22	Dimensions	GUC3CHD22
Upstream Port		Unit Dimensions	
USB-C	USB 3.1 Type-C	Height	2.16" (5.5 cm) plus 5.7" (14.5 cm) cable
Downstream Port		Depth	0.59" (1.5cm)
HDMI	2x HDMI with dual stream up to 4K@30Hz	Length	2.56" (6.5 cm)
Power		Inner Pack	
Amps	Max. 0.4A	Width	6.10" (15.5cm)
Voltage	Max. 5V	Height	5.71" (14.5cm)
Environment		Length	7.68" (19.5cm)
Humidity	10% to 85% RH (no condensation)	Inner Pack Qty.	6
Operation Temperature	0 ? to +45?	Unit Package Dimensions	
Operating System Requirements		Width	1.18" (3cm)
Mac		Height	5.7" (14.5cm)
Windows		Length	5.31" (13.5cm)
Protocols		Master Carton	
	MST, SST, Billboard supported	Width	16.14" (41cm)
		Height	6.89" (17.5cm)
		Depth	12.2" (31cm)
		Master Carton Qty.	24
		Weight	
		Master Carton Wt.	8.16lb (3.7kg)
		Inner Pack Wt.	1.76lb (0.8kg)
		Unit Pack Wt.	0.25lb (0.11kg)
		Unit Wt.	0.15 lb (0.068kg)