

GUC3CVGA

USB Type-C to VGA Adapter



USB-C to VGA Adapter

IOGEAR's new USB Type-C to VGA adapter is the ideal hardware solution to convert a USB-C connection to a VGA video output. This adapter gives you the ability to connect your USB-C based device like the Apple® MacBook®, Google® Chromebook Pixel™ and the Nokia™ N1 Tablet to any VGA based display, projector or HDTV.

USB Type-C - The Next Break Through in Connectivity

USB-C is the latest advancement in the consumer electronics industry for device connectivity. Supporting a universal connectivity standard, USB-C unites all of your core functions into one powerful port. Thanks to its versatile design, compact footprint and unparalleled performance, USB-C connections are featured on next generation ultra-portable devices like the Apple® MacBook™, Google® Chromebook Pixel™ and Asus® ZenPad tablets.


High-Resolution Video Support

The GUC3CVGA USB Type-C to VGA adapter supports video resolutions of up to 1920x1200 and Full HD 1080p video playback. The result is crystal clear imagery when needing to display presentations on a projector, reviewing documents on a high-resolution desktop monitor or playing back high-definition video on an HDTV.

- Connect your USB Type-C based Notebook, Ultrabook or Tablet to a VGA based display, projector or HDTV
- Compatible with the latest USB Type-C based desktops, notebooks and tablets including Apple® MacBook®, Chromebook™ Pixel and the Nokia N1 tablet
- Supports Video Resolutions of up to 1920x1200
- Reversible USB Type-C connector ensures proper operation regardless of how the adapter is connected
- Compliant with DisplayPort Specification 1.2 Alternate Mode
- USB Bus Powered - No external power adapter necessary
- Supports Plug-N-Play; No drivers or software installation necessary
- USB 3.1 Gen 1 Compliant
- HDCP Compliant
- Works with the new USB-C iPad Pro under mirror-mode



How does it work?

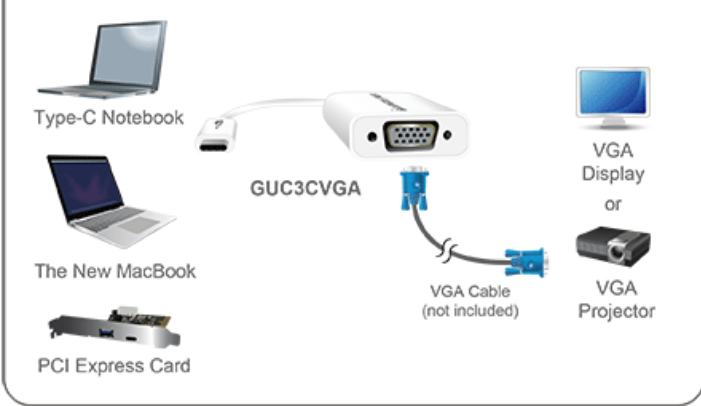

Requirements

Package Contents

- | | |
|---|---|
| <ul style="list-style-type: none">• Input<ul style="list-style-type: none">1 x USB Type-C Source• Output<ul style="list-style-type: none">1 x Projector, Display or HDTV with VGA Port | <ul style="list-style-type: none">• 1 x USB Type-C to VGA Adapter |
|---|---|

Specifications

Function	GUC3CVGA
Connectors (Input)	USB Type-C (Male; 24-Pin)
Video connections	
Output	VGA (Female; 15-Pin High Density D-Sub)
Video Resolution	Up to 1920x1200
Data Rate	Up to 5.4Gbps (Per Lane)
USB Specification	USB 3.1 Gen 1
Power Supply	USB Bus-Powered
Environment	
Humidity	10% to 85% RH (No Condensation)
Operation Temperature	32°~113°F (0°~ 45°C)
Storage Temperature	14°~176°F (-10°~ 80°C)
Warranty	Limited Lifetime

Dimensions	GUC3CVGA
Unit Dimensions	
Height	1.5" (3.8cm)
Depth	0.625" (1.6cm)
Length	7.25" (18.4cm)
Inner Pack	
Width	4.375" (11.1cm)
Height	3.625" (9.2cm)
Length	10.75" (27.3cm)
Inner Pack Qty.	12
Unit Package Dimensions	
Width	4" (10.2cm)
Height	10" (25.4cm)
Depth	0.625" (1.6cm)
Master Carton	
Width	9.5" (24.1cm)
Height	8" (20.3cm)
Depth	11.5" (29.2cm)
Master Carton Qty.	48
Weight	
Master Carton Wt.	4.7lb (2.14kg)
Inner Pack Wt.	1.0lb (0.46kg)
Unit Pack Wt.	0.05lb (0.02kg)
Unit Wt.	0.05lb (0.02kg)