

**GUC3CVGA** 

# USB Type-C to VGA Adapter



## **USB-C** to **VGA** Adapter

IOGEAR's new USB Type-C to VGA adapter is the ideal hardware solution to convert a USB-C connection to a VGA video output. This adapter gives you the ability to connect your USB-C based device like the Apple® MacBook®, Google® Chromebook Pixel™ and the Nokia™ N1 Tablet to any VGA based display, projector or HDTV.

# **USB Type-C - The Next Break Through in Connectivity**

USB-C is the latest advancement in the consumer electronics industry for device connectivity. Supporting a universal connectivity standard, USB-C unites all of your core functions into one powerful port. Thanks to its versatile design, compact footprint and unparalleled performance, USB-C connections are featured on next generation ultra-portable devices like the Apple® MacBook™, Google® Chromebook Pixel™ and Asus® ZenPad tablets.

## **High-Resolution Video Support**

The GUC3CVGA USB Type-C to VGA adapter supports video resolutions of up to 1920x1200 and Full HD 1080p video playback. The result is crystal clear imagery when needing to display presentations on a projector, reviewing documents on a high-resolution desktop monitor or playing back high-definition video on an HDTV.


- Connect your USB Type-C based Notebook, Ultrabook or Tablet to a VGA based display, projector or HDTV
- Compatible with the latest USB Type-C based desktops, notebooks and tablets including Apple® MacBook®, Chromebook™ Pixel and the Nokia N1 tablet
- Supports Video Resolutions of up to 1920x1200
- Reversible USB Type-C connector ensures proper operation regardless of how the adapter is connected
- Compliant with DisplayPort Specification 1.2 Alternate Mode
- USB Bus Powered No external power adapter necessary
- · Supports Plug-N-Play; No drivers or software installation necessary
- USB 3.1 Gen 1 Compliant
- HDCP Compliant
- Works with the new USB-C iPad Pro under mirror-mode









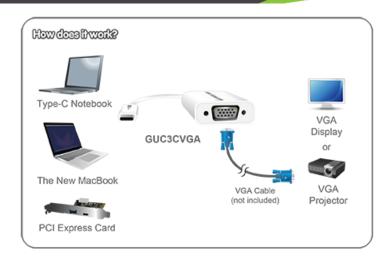

#### Requirements

#### **Package Contents**

• Input

1 x USB Type-

C Source

• Output

1 x Projector, Display or HDTV with VGA Port • 1 x USB Type-C to VGA Adapter



## **Specifications**

Function	GUC3CVGA	Dimensions	GUC3CVGA
Connectors (Input)	USB Type-C (Male; 24-Pin)	Unit Dimensions	
Video connections		Height	1.5" (3.8cm)
Output	VGA (Female; 15-Pin High Density D-Sub)	Depth	0.625" (1.6cm)
Video Resolution	Up to 1920x1200	Length	7.25" (18.4cm)
Data Rate	Up to 5.4Gbps (Per Lane)	Inner Pack	
USB Specification	USB 3.1 Gen 1	Width	4.375" (11.1cm)
Power Supply	USB Bus-Powered	Height	3.625" (9.2cm)
Environment		Length	10.75" (27.3cm)
Humidity	10% to 85% RH (No Condensation)	Inner Pack Qty.	12
Operation Temperature	32°~113°F (0°~ 45°C)	Unit Package Dimensions	
Storage Temperature	14°~176°F (-10°~ 80°C)	Width	4" (10.2cm)
Warranty	Limited Lifetime	Height	10" (25.4cm)
		Depth	0.625" (1.6cm)
		Master Carton	
		Width	9.5" (24.1cm)
		Height	8" (20.3cm)
		Depth	11.5" (29.2cm)
		Master Carton Qty.	48
		Weight	
		Master Carton Wt.	4.7lb (2.14kg)
		Inner Pack Wt.	1.0lb (0.46kg)
		Unit Pack Wt.	0.05lb (0.02kg)
		Unit Wt.	0.05lb (0.02kg)