

GUD3C04PWRKIT

Access Pro™ 2-Port USB-C KVM Switch with Power Adapter KIT




- 2-Port USB-C KVM Switch with Power Delivery
- Control and share 2 USB-C devices with DP Alt Mode from one keyboard, mouse, and an HDMI monitor
- Power Delivery¹ (USB-C external power needed) with up to 75W charging for laptop² and up to 10W for smartphone³
- Supports USB-C/Thunderbolt³ MacBook Air[®], MacBook Pro[®], iPad Pro[®], Windows[®] & Android 8+ devices
- Resolution up to 4K UHD 3840 x 2160 @30Hz for USB-C laptops

USB-C KVM - Switch Between Two USB-C Devices

Easily switch between two USB-C devices and control them with one keyboard, one mouse and view content on one 4K monitor. IOGEAR's Access Pro? 2-Port USB-C KVM Switch requires no software and comes complete with the Power Delivery function, Smart USB-C to USB-C 3.3 ft. cable with E-Marker, a 6-foot push-button remote switch and a 60W USB-C GaN power adapter.

Why spend extra money on features you don't need? The USB-C KVM offers the most efficient and affordable way to switch between two USB-C or Thunderbolt³-equipped Mac[®] computers, PCs, iPad[®] or Android[®] tablets and smartphones with a single-cable connection to each device without additional drivers or software.

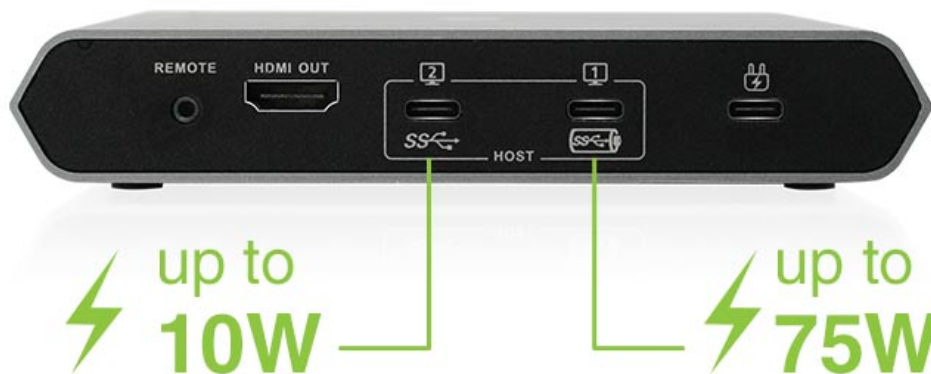

- 2-Port USB-C KVM Switch with Power Delivery
- Control and share 2 USB-C devices with DP Alt Mode from one keyboard, mouse, and an HDMI monitor
- Power Delivery¹ (USB-C external power included) with up to 75W charging for laptop² and up to 10W for smartphone³
- Includes 60W USB-C GaN charger (GPAWC60W) & USB-C to USB-C cable (G2LU3CCM01E)
- Supports USB-C/Thunderbolt³ MacBook Air[®], MacBook Pro[®], iPad

Pro[®], Windows[®] & Android 8+ devices

- Resolution up to 4K UHD 3840 x 2160 @30Hz for USB-C laptops

- Resolution up to 1080p @60 for USB-C tablets and smartphones
- Thunderbolt 3 laptop compatible
- USB 3.1 Gen1 supports data transfer rates up to 5 Gbps
- Convenient switching between devices via a push-button remote
- Supports DeX[®] Mode⁴ on Samsung USB-C smartphones
- Plug-n-Play; no software or driver needed
- HDCP 1.4 Compliant

Note:


¹For optimal performance, Limited Power Source (LPS) certified USB-C power adapter

²Must be plugged into Primary USB-C port 1

³When plugged into Secondary USB-C port 2

⁴Samsung DeX Mode is only supported on Samsung Galaxy S8, S8+, S9, S9+, S10, S10+, S10e, S20, S20+, S20FE, S20 Ultra, S21, S21+, S21FE, S21 Ultra, S22, S22+, S22FE, S22 Ultra, S23, S23+, S23FE, S23 Ultra, S24, S24+, S24FE, S24 Ultra, S25, S25+, S25FE, S25 Ultra, S26, S26+, S26FE, S26 Ultra, S27, S27+, S27FE, S27 Ultra, S28, S28+, S28FE, S28 Ultra, S29, S29+, S29FE, S29 Ultra, S30, S30+, S30FE, S30 Ultra, S31, S31+, S31FE, S31 Ultra, S32, S32+, S32FE, S32 Ultra, S33, S33+, S33FE, S33 Ultra, S34, S34+, S34FE, S34 Ultra, S35, S35+, S35FE, S35 Ultra, S36, S36+, S36FE, S36 Ultra, S37, S37+, S37FE, S37 Ultra, S38, S38+, S38FE, S38 Ultra, S39, S39+, S39FE, S39 Ultra, S40, S40+, S40FE, S40 Ultra, S41, S41+, S41FE, S41 Ultra, S42, S42+, S42FE, S42 Ultra, S43, S43+, S43FE, S43 Ultra, S44, S44+, S44FE, S44 Ultra, S45, S45+, S45FE, S45 Ultra, S46, S46+, S46FE, S46 Ultra, S47, S47+, S47FE, S47 Ultra, S48, S48+, S48FE, S48 Ultra, S49, S49+, S49FE, S49 Ultra, S50, S50+, S50FE, S50 Ultra, S51, S51+, S51FE, S51 Ultra, S52, S52+, S52FE, S52 Ultra, S53, S53+, S53FE, S53 Ultra, S54, S54+, S54FE, S54 Ultra, S55, S55+, S55FE, S55 Ultra, S56, S56+, S56FE, S56 Ultra, S57, S57+, S57FE, S57 Ultra, S58, S58+, S58FE, S58 Ultra, S59, S59+, S59FE, S59 Ultra, S60, S60+, S60FE, S60 Ultra, S61, S61+, S61FE, S61 Ultra, S62, S62+, S62FE, S62 Ultra, S63, S63+, S63FE, S63 Ultra, S64, S64+, S64FE, S64 Ultra, S65, S65+, S65FE, S65 Ultra, S66, S66+, S66FE, S66 Ultra, S67, S67+, S67FE, S67 Ultra, S68, S68+, S68FE, S68 Ultra, S69, S69+, S69FE, S69 Ultra, S70, S70+, S70FE, S70 Ultra, S71, S71+, S71FE, S71 Ultra, S72, S72+, S72FE, S72 Ultra, S73, S73+, S73FE, S73 Ultra, S74, S74+, S74FE, S74 Ultra, S75, S75+, S75FE, S75 Ultra, S76, S76+, S76FE, S76 Ultra, S77, S77+, S77FE, S77 Ultra, S78, S78+, S78FE, S78 Ultra, S79, S79+, S79FE, S79 Ultra, S80, S80+, S80FE, S80 Ultra, S81, S81+, S81FE, S81 Ultra, S82, S82+, S82FE, S82 Ultra, S83, S83+, S83FE, S83 Ultra, S84, S84+, S84FE, S84 Ultra, S85, S85+, S85FE, S85 Ultra, S86, S86+, S86FE, S86 Ultra, S87, S87+, S87FE, S87 Ultra, S88, S88+, S88FE, S88 Ultra, S89, S89+, S89FE, S89 Ultra, S90, S90+, S90FE, S90 Ultra, S91, S91+, S91FE, S91 Ultra, S92, S92+, S92FE, S92 Ultra, S93, S93+, S93FE, S93 Ultra, S94, S94+, S94FE, S94 Ultra, S95, S95+, S95FE, S95 Ultra, S96, S96+, S96FE, S96 Ultra, S97, S97+, S97FE, S97 Ultra, S98, S98+, S98FE, S98 Ultra, S99, S99+, S99FE, S99 Ultra, S100, S100+, S100FE, S100 Ultra



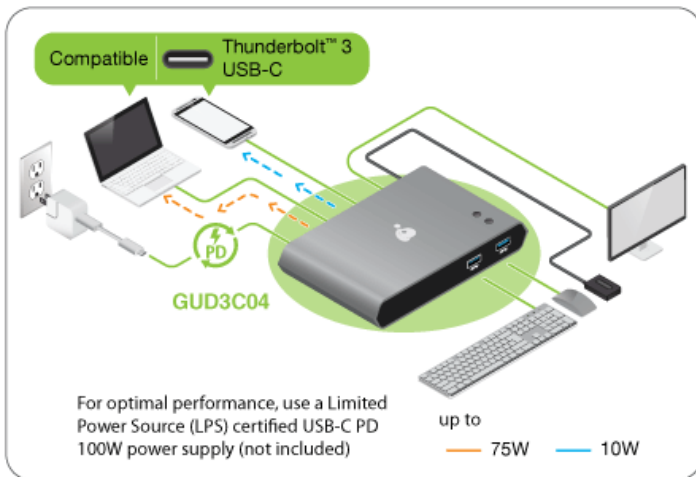

Requirements

Package Contents

- | | |
|---|---|
| <ul style="list-style-type: none"> • Sources: <ul style="list-style-type: none"> ◦ USB-C enabled devices with DP-Alt Mode over USB-C ◦ USB-C external power source (recommend a Limited Power Source (LPS) certified USB-C power adapter) • Console: <ul style="list-style-type: none"> ◦ HDMI monitor ◦ Standard wired 104 keys USB keyboard ◦ Standard wired 2 or 3-button USB mouse • Operations: <ul style="list-style-type: none"> ◦ Windows® 10 (32/64 bit)+ ◦ MacOS® X 10.12+ ◦ iPadOS® 12.1+; iPad Pro® 3rd generation (2018)¹ ◦ Android 8+² ◦ Chrome OS® | <ul style="list-style-type: none"> • 1x GUD3C04 • 1x GPAWC60W • 1x G2LU3CCM01E |
|---|---|

¹For complete HID keyboard and mouse support, iPadOS 13+ is recommended

²DeX Mode is only supported on Samsung Galaxy S8, S8+, S9, S9+, and Note 8, Note 9, and Tab S4 for extended screen; other Android devices support mirror screen

Specifications

Function	GUD3C04PWRKIT	Dimensions	GUD3C04PWRKIT
Upstream Port		Physical Properties	
USB-C	1x USB-C for laptop, 1x USB-C for smartphone; data rate up to 5Gbps	Case Dimension	10x 8x 6 in.
Downstream Port		Case Weight	2.3 lb.
HDMI	1x HDMI 1.4b compliant, up to 4K UHD 3840 x 2160 @ 30Hz resolution (4K laptops); up to 1080p (smartphones and tablet sources)	Case Qty	1
USB-A	2x USB-A 3.1 Gen 1, data rate up to 5Gbps		
USB-C	1x USB-C for Power Delivery Pass-Thru		
Power Consumption	5V/3A (15W)		
Operating System Requirements			
Mac	MacOS X 10.12+		
Windows	Windows 10 (32/64 bit)+		
Android	Android 8+		
iOS	iPadOS 12.1+; iPad Pro 3rd generation (2018) for full HID keyboard and mouse support		
Chrome OS	Chrome OS		
Environment			
Humidity	0?80% RH, Non-condensing		
Operation Temperature	32 - 104°F (0?40°C)		
Storage Temperature	-4 - 140°F (-20?60°C)		