

GUD3C11

USB-C Triple Video Docking Station with 120 Watt Power Supply (TAA Compliant)



- Dock and expand your USB-C laptop with 11 port options
- Connect up to 3 HD 4K displays via 2 DisplayPorts, 1 HDMI port*
- Keep your laptop charged with up to 60W Power Delivery
- 2x DisplayPort++ 1.2 ports support dual displays to 4K @ 60Hz
- 1x HDMI port with DP Alt Mode supports HD display to 4K @ 30Hz

Triple Video USB-C Docking Station Packed With Features

IOGEAR TAA Compliant USB-C Triple Video Docking Station is designed to transform your USB-C laptop into a full-featured workstation that rivals a desktop. The Dock is equipped with 11 port options to add devices like a full-sized keyboard and mouse, an external hard drive, printer, webcam, a speaker set, and more via a single USB-C cable. Connect up to three monitors* through the Triple Video Dock to expand your visual workspace.


Triple 4K Ultra-HD Monitor Setup

Enjoy the remarkable visual experience of 4K Ultra HD (UHD), at four times the resolution of standard HD. The Dock supports impressive, Cinema 4K quality on a single DisplayPort monitor to 4096 x 2160 @60Hz for enhanced enjoyment while watching videos, playing games, working and creating. Attach dual 4K UHD DisplayPort screens and add a third 4K UHD HDMI display for crystal clear images and video quality to 3840 x 2160 @60Hz across all three.

- Dock and expand your USB-C laptop with 11 port options
- Connect up to 3 HD 4K displays via 2 DisplayPorts, 1 HDMI port*
- Keep your laptop charged with up to 60W Power Delivery
- 2x DisplayPort++ 1.2 ports support dual displays to 4K @ 60Hz
- 1x HDMI port with DP Alt Mode supports HD display to 4K @ 30Hz
- 1x USB-C port offers fast data transfer rates to 5Gbps
- 2x USB 3.0 ports with one BC1.2 fast charging port
- 2x USB 2.0 ports; 1x Gigabit Ethernet port
- 2x 3.5mm audio ports for a headphone and microphone
- TAA Compliant

* Requires installation of DisplayLink driver



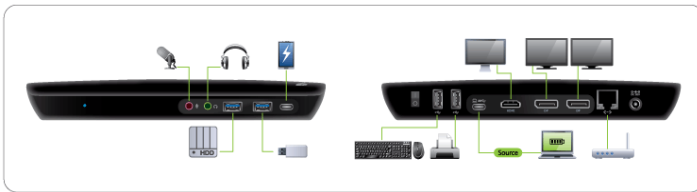

Requirements

Host device requirements

- USB-C 3.0 or 3.1(Thunderbolt 3 compatible) device with DP Alt Mode Support
- USB-C with USB mode can only support up to 2 monitors

OS requirements

- Windows 7/8/8.1/10/11
- Mac OS X 10.10+
- Chrome OS
- Ubuntu
- DisplayLink Driver installation (<http://www.displaylink.com/downloads>)
- Host computer USB-C port must support USB Power Delivery 2.0 for charging function

Notes for M1 Mac Users: For M1 Mac Users, please check DisplayLink website for latest Mac Displaylink driver: <http://www.displaylink.com/downloads/macOS>

Package Contents

- 1 x GUD3C11
- 1 x 120W AC power adapter
- 1 x 3.3ft USB Type-C to Type-C cable
- 1 x Driver CD
- 1 x Quick Start Guide
- 1 x Warranty card

Specifications

| Function | GUD3C11 | Dimensions | GUD3C11 |
|--------------------------------------|--|--------------------------------|------------------|
| Upstream Port | | Unit Dimensions | |
| USB-C | USB 3.1 Gen 1 5Gbps, with Power Delivery up to 60W | Height | 3.54" (9cm) |
| Downstream Port | | Length | 8.86" (22.5cm) |
| Audio In | 1x 3.5mm audio port | Depth | 1.18" (3cm) |
| Audio Out | 1x 3.5mm audio port | Inner Pack | |
| DisplayPort | 2x DisplayPort with up to 4K@60Hz (3840x2160) | Height | 12.8" (32.5cm) |
| Ethernet | 1x Gigabit Ethernet | Length | 12.8" (32.5cm) |
| HDMI | 1x HDMI with DP Alt Mode, supports up to 4K@30hz (3840x2160) | Width | 10.39" (26.4cm) |
| USB-A | 2x USB 3.0; 2x USB 2.0 | Inner Pack Qty. | 3 |
| USB-C | 1x USB 3.1 Gen 1 | Unit Package Dimensions | |
| Power Adapter | External 120W AC Adapter | Height | 3.27" (8.3cm) |
| Operating System Requirements | | Length | 12.6" (32cm) |
| Mac | Mac OS X 10.10+ ~ 10.13.3 | Width | 5.31" (13.5cm) |
| Windows | Windows 7 / 8 / 8.1 / 10 | Master Carton | |
| Environment | | Height | 11.22" |
| Humidity | | Width | 13.78" |
| Operation Temperature | | Depth | 12.6" |
| Power | | Master Carton Qty. | 6 |
| Power Delivery Pass-Thru | Power Delivery Pass-through up to 60W | Weight | |
| Protocols | | Master Carton Wt. | 19.47lb (8.83kg) |
| | HDCP 2.2, DisplayPort Alt Mode | Inner Pack Wt. | 9.06lb (4.11kg) |
| | | Unit Pack Wt. | 2.6lb (1.18kg) |
| | | Unit Wt. | 0.8lb (0.36kg) |