IOGEAR®

GUE310

USB 3.0 BoostLinq - 33ft (10m), USB 3.0 Extender (TAA Compliant)

USB Extension Cable 33ft (10m)

The IOGEAR TAA Compliant USB 3.0 BoostLinq extension cable is the perfect solution to extend the reach of any USB-connected device for a seamless interoperative connection between USB 3.0 hosts and peripherals. This versatile male to female cable is capable of extending a USB 3.0 connection up to 33 feet while maintaining an optimal SuperSpeed data transfer rate of 5Gbps. The BoostLinq is an active cable, which means it uses active built-in electronics to amplify USB 3.0 signals and maintain USB 3.0 SuperSpeed data transfers over an extended distance, with no loss of data integrity or signal quality. This powerful cable features integrated microchips along its entire length to guarantee end-to-end optimal performance. The cable has a USB Type A male and a Type A female connector. The USB A connector is the rectangular shaped plug found on PC's, hubs, and many other host interfaces. The BoostLinq increases the length of your device cable from your USB host computer and provides another female A connector up to 33 feet away for all your USB needs.
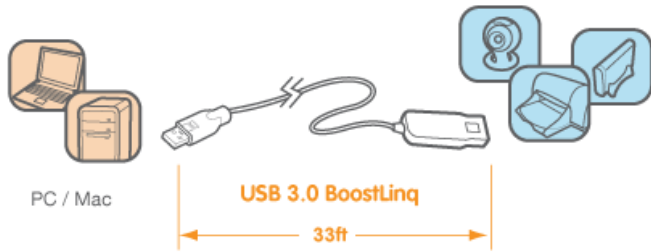
- Extend a USB 3.0 SuperSpeed device connection up to 33ft
- Built-in booster chipset amplifies USB 3.0 signals for robust performance
- USB 3.0 transfer rates of up to 5Gbps for the best data transmission
- Up to 10x faster than USB 2.0

- Plug & Play design-no drivers or power supply needed
- Daisy chain up to 5 BoostLinqs to reach a maximum distance of 165ft*
- Backwards compatible with USB 2.0 and 1.1 devices
- TAA compliant

*Requires optional power supply

How does it work?

- Connect the USB 3.0 BoostLinq your computer
- Connect & sync USB 3.0 devices up to 33ft away

PC / Mac

USB 3.0 BoostLinq

33ft

Requirements

- **Hardware:**
- USB 3.0 port
- USB 3.0 devices
-
- **Operating System:**
- Windows® XP, Windows Vista®, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10
- Mac OS 9 to 10.x
- Oracle® Solaris
- Linux®, Unix and other USB supported systems*
- Google Chrome OS™

*Additional drivers and support may be needed

Package Contents

- 1 x USB 3.0 BootLinq - 33ft (10m) cable
- 1 x USB Type-A female to male adapter
- 1 x Quick Start Guide
- 1 x Warranty Card

Specifications

Function	GUE310
Cable Length	33 feet
Computer Interface	USB Type A
Daisy Chain	Up to 5 level daisy chain
Device Connection	USB Type A
Environment	
Operation Temperature	32 to 122 degree Fahrenheit
Storage Temperature	-40 to 131 degree Fahrenheit
USB Specification	USB 3.0
Transfer Rate	Up to 5Gps
LEDs	
Link	1
Cable Type	Shielded
Max Output Power	840mA @ 5VDC
Operating System Support	Windows Vista®, Windows® 7, Windows® 8, Windows® 8.1 / Mac OS X v10.3.9 and above / Linux Kernel / Google Chrome OS?

Dimensions	GUE310
Unit Dimensions	
Width	.87" (2.2 cm)
Height	.5" (1.27 cm)
Length	33 ft (10 m)
Inner Pack	
Width	8.3" (21.1 cm)
Height	8.4" (21.3 cm)
Length	9.6" (24.4 cm)
Inner Pack Qty.	3
Unit Package Dimensions	
Width	9.1" (23.1 cm)
Height	2.6" (6.6 cm)
Depth	7.9" (20 cm)
Master Carton	
Width	10.2" (25.9 cm)
Height	9.9" (25.1 cm)
Depth	17.1" (43.43 cm)
Master Carton Qty.	6
Weight	
Master Carton Wt.	13.9 lb (6.3 kg)
Inner Pack Wt.	6.35 lb (2.9 kg)
Unit Pack Wt.	2 lb (.9 kg)
Unit Wt.	1.75 lbs. (0.79 kg)