


GUF3121

USB 2.0/FireWire PCI card



- 40 Times Faster Than The Original USB
- Supports High Speed Data Transfer Rates of up to 480 Mbps
- Supports Mac OS 8.6 (OS X needed for USB 2.0 support) or Greater; Windows® 98SE, 2000, ME, XP
- Fully Backward Compatible With USB 1.1
- Hot swappable - Plug-n-Play
- PC Power Management v2.2 Compliant
- 3 External Type A USB Ports
- 1 Internal Type A USB Port
- 2 External 6 pin FireWire Port
- 1 Internal 6 pin FireWire Port

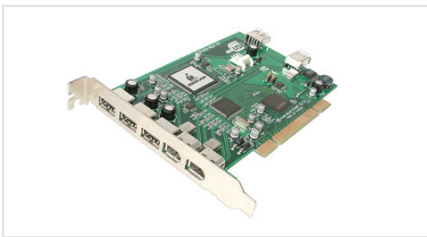

Requirements

For PC Users

- Windows® 98SE, 2000, ME, XP
- Available PCI Card Slot

For MAC Users

- Mac G3
- Mac OS 8.6 or Greater
- Mac OS X (for USB 2.0 support)
- Available PCI Card Slot

Package Contents

- 1 GUF3121 Combo PCI Card
- 1 Installation CD
- 1 ArcSoft "ShowBiz" DV Editing Software CD
- 1 Users Manual
- 1 Warranty/Registration Card

Specifications

Function	GUF3121
Ports	(2) USB 2.0 External, (1) Internal, (2) FireWire 1394a External, (1) Internal
Operating Temperature	20 to 50 degrees (Celsius)
Storage Temperature	0 to 70 degrees (Celsius)
Operating System Support	Win 98SE, 2000, ME, XP, MAC OS 8.6 to 9.1 (USB 1.1) Mac OS X.1.3 (USB 2.0)
FireWire Specification	IEEE 1394a
USB Specification	USB 1.1 and 2.0 compliant
Transfer Rate	USB - 480 Mbps, FireWire - 100, 200, 400 Mbps
Humidity	20-80% RH, (Non Condensing)

Dimensions	GUF3121
Unit Package Dimensions	
Height	6.5 in.
Width	2.5 in.
Depth	6.5 in.
Master Carton	
Height	14 in. (35.56 cm.)
Width	10.5 in. (26.67 cm.)
Depth	16.5 in. (41.91 cm.)
Master Carton Qty.	12
Weight	
Master Carton Wt.	10.20 lbs. (4.59 kg.)
Unit Pack Wt.	0.70 lbs.