

GUH304

met(AL) USB 3.0 4-Port Hub



4-Port USB 3.0 Aluminum Hub

While today's laptops are lighter and more compact than ever, that savings in size comes at the cost of fewer USB ports to connect your accessories. With the IOGEAR met(AL) Hub series you can instantly expand your USB connectivity with 4 SuperSpeed USB 3.0 ports, allowing you to reclaim your connectivity. The all-aluminum body of the met(AL) Hub series is a sleek and stylish natural extension to your Macbook or PC, and strong enough to hold up to the abuse of on-the-go use. The GUH304 USB 3.0 4-Port met(AL) Hub features SuperSpeed 5Gbps data transfer speeds* (ten times the speed of USB 2.0), and is a convenient single connection point for all your peripherals.

A version of the GUH304 is also available with an included power supply, called the [GUH304P](#). The IOGEAR [GUH304P met\(AL\) P4P Hub](#) includes its own A/C adapter, so connecting power hungry devices like external hard drives while charging your smartphone is no problem for this mobile hub.

Backwards Compatible

The IOGEAR USB 3.0 4-Port met(AL) Hub is both plug-n-play and backwards compatible with USB 2.0 and 1.1 devices, making it easy for any user to transfer files from a device to a computer, or vice versa.


* Device must be plugged into a USB 3.0 port in order to achieve SuperSpeed rates

- 4-Port SuperSpeed USB 3.0 Hub with up to 5Gbps data transfer rate
- Up to 10x faster than USB 2.0
- Aluminum housing designed to match Macbook computers
- Compatible with Mac and Windows
- Backwards compatible with USB 2.0, 1.1 and 1.0 devices*
- Supports overcurrent protection
- USB bus powered
- Plug-n-Play - no drivers or software required

*Device must be plugged into a USB 3.0 port in order to achieve SuperSpeed rates



How does it work?

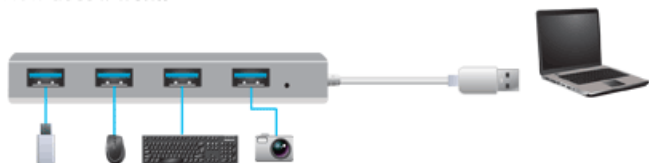

Requirements

- Windows Vista®, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10
- Mac OS X10.2+
- Linux
- USB 3.0 port

Package Contents

- 1 x GUH304
- 1 x Quick Start Guide
- 1 x Warranty Card

Specifications

Function	GUH304
Operating System Requirements	
Windows	Windows Vista®, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10
Mac	Mac OS X10.2+
Linux	Linux
Connectors	
USB	USB 3.0
Power Output Rating	
Total AC Power Outlet, 50/60Hz	DC5V@2A
USB Specification	3.0, 2.0, 1.1
Transfer Rate	Up to 5Gbps
Ports	4 x USB 3.0
LEDs	
Data	Blue
Operating Temperature	32 ~ 104F (0 ~ 40C)
Storage Temperature	14 - 158F (-10 ~ 70C)
Housing	
Case	Aluminum alloy

Dimensions	GUH304
POP Information	
10" Peg Hook	4
6" Peg Hook	2
Unit Dimensions	
Height	.75" (1.9cm)
Length	4.4" (11.2cm)
Depth	1.42" (3.6cm)
Inner Pack	
Height	7" (17.8cm)
Length	8.5" (21.5cm)
Width	10.3" (26.2cm)
Inner Pack Qty.	6
Unit Package Dimensions	
Height	4.8" (12.2cm)
Length	5.7" (14.5cm)
Depth	2.6" (6.5cm)
Master Carton	
Height	11.6" (29.5cm)
Width	14.3" (36.5cm)
Depth	14.5" (36.8cm)
Master Carton Qty.	24
Weight	
Master Carton Wt.	12lb (5.4kg)
Inner Pack Wt.	2.6lb (1.2kg)
Unit Pack Wt.	.3lb (.14kg)
Unit Wt.	.15lb (.07kg)