

GUH3C22P

USB-C 10G 4-Port Hub w/ 100W Power Delivery 3.0 Pass-Through



- Expand any USB-C port's data & charging functionality
- Charge laptop & connected devices through 2 ports
- 2x USB-C 3.1 Gen 2 ports; 1x charges to 100W via power pass-through
- 2x USB 3.0 Type-A ports; 1x BC1.2 charging port (1.5A)
- Ultra-fast 10Gbps data transfer rate

10G Hub Expands a Single USB-C Port

This 4-Port USB Hub bridges the gap between your computer and older USB technology devices. Expand a single USB-C port to connect and charge a smartphone and tablet, digital camera and peripherals such as a printer, external hard drive and much more. With the USB 3.1 Gen 2 specification, this compact hub delivers lightening-fast connectivity and file transfer capabilities. Transfer high bandwidth data like large files, photos, and video at 10Gbps speeds.

- Expand any USB-C port's data & charging functionality
- Charge laptop & devices with up to 100W pass-through*
- 2x USB-C 3.1 Gen 2 ports; 1x charges to 100W via power pass-through
- 2x USB 3.0 Type-A ports; 1x BC1.2 charging port (1.5A)
- Ultra-fast 10Gbps data transfer rate
- Compatible with Thunderbolt 3 (USB-C) enabled laptops & tablets

- Fast Role Swap provides safe operation for connected devices during power changes


* Power Delivery pass-through requires USB-C charger from your laptop. A total of up to 85W can be charged to the laptop after deduction of 15W is used by the dock.

** Pass-thru power delivered to the laptop is dependent upon the capacity of your USB-C power supply.

Ex. If your USB-C power supply is 60W, then the maximum power can be delivered to the laptop is $60W - 15W = 45W$.

If your power supply is 87W, then the maximum power can be delivered to the laptop is $87W - 15W = 60W$.



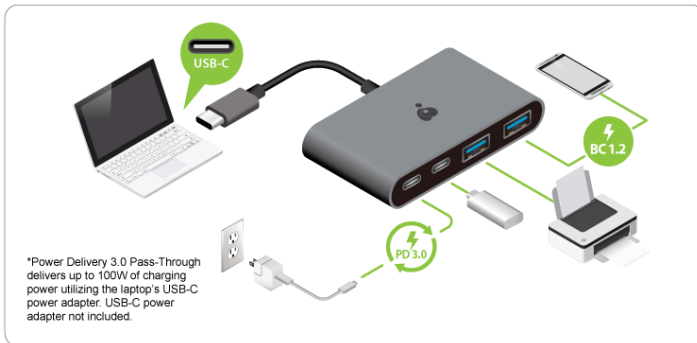

Requirements

- USB-C (Thunderbolt 3 compatible) Laptops & Tablets
- Windows 7/8/8.1/10
- Mac OS X 10.7+
- Chrome OS

Package Contents

- 1 x GUH3C22P
- 1 x Quick Start Guide
- 1 x Warranty Card

Specifications

Function	GUH3C22P	Dimensions	GUH3C22P
Upstream Port		Unit Dimensions	
USB-C	USB 3.1 Gen 2	Height	1.65" (4.2cm) + 4.6" (11.6cm) SR cable
Downstream Port		Depth	0.55" (1.4cm)
USB-A	2x USB 3.0, 1 port supports BC1.2 charging (1.5A)	Length	2.95" (7.5cm)
USB-C	2x USB 3.1 supports data, 1 port supports Power Delivery 3.0	Inner Pack	
Power		Width	5.71" (14.5cm)
Power Delivery Pass-Thru	PD 3.0 / 100W (A total of up to 85W can be charged to the laptop after deduction of max 15W used by the dock)	Height	6.10" (15.5cm)
Data Rate		Length	7.67" (19.5cm)
Environment		Inner Pack Qty.	6
Humidity	10% to 85% RH (no condensation)	Unit Package Dimensions	
Operation Temperature	0C to +45C	Height	5.67" (14.4cm)
Operating System Requirements		Depth	1.18" (3cm)
Mac	Mac OS X 10.7+	Length	5.31" (13.5cm)
Windows	Windows 7 / 8 / 8.1 / 10	Master Carton	
		Width	16.14" (41cm)
		Height	12.20" (31cm)
		Depth	6.89" (17.5cm)
		Master Carton Qty.	24
		Weight	
		Master Carton Wt.	6.61 lb (3kg)
		Inner Pack Wt.	1.1lb (0.5kg)
		Unit Pack Wt.	0.2lb (0.09kg)
		Unit Wt.	0.1lb (0.045kg)