

GUH420

4-Port USB 2.0 Hub and 3-Port FireWire? Combo Hub



The USB 2.0 / FireWire Universal Hub offers a complete high speed connectivity solution at a fraction of the cost of other separate USB 2.0 and FireWire Universal Hubs. It brings USB 2.0 and FireWire connectivity to your notebook or desktop computer. You'll enjoy the convenience and reliability that has made USB and FireWire industry standards when it comes to connecting multiple high-tech peripheral devices. USB 2.0 and FireWire provide high bandwidth, thus broadening the range of peripherals that may be attached to your computer.

FireWire

- Three up/downstream ports
- 400 Mbps data throughput
- Supports 100/200/400 Mbps connections
- Fully IEEE 1394 compliant
- Connect up to 63 devices together (by daisy chaining)

- 100% backward compatible with USB 1.1
- Removable stand allows horizontal or vertical use
- Chain up to 127 devices together (by daisy chaining)
- Plug-n-Play, hot swappable
- Automatically switches to the highest speed supported by peripheral
- Hot Pluggable - connect devices without restarting the computer
- Easy to install - no jumpers, switches or terminators required


USB 2.0

- Provides four USB 2.0 ports
- Supports data transfer rate of up to 480 Mbps



How does it work?

- Connect the included USB 2.0 & FireWire cables to the hub and your computer's available USB & FireWire ports
- Hook up your USB printer, scanner, digital camera, external hard drive, and other USB & FireWire devices. Enjoy blasting speed and all peripherals with one compact hub!

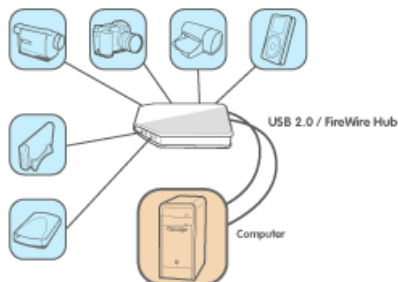

Requirements

Package Contents

Mac

- PowerMac G3 (Blue & White Tower) or later
- Mac OS v8.6 or higher
- * Mac OSX 10.1.5 or higher is required for USB 2.0 functionality
- 64MB of RAM
- Available USB 2.0 and FireWire ports

- One GUH420 USB 2.0 (4-Ports)/ FireWire (3-Ports) Combo Universal Hub
- One USB 2.0 6 feet A type to B type Cable
- One FireWire 6 feet 6 pin to 6 pin Cable
- One 100-240VAC, DC 5V 2.6A Switching Adapter
- One Warranty Card
- One Quick User Guide

PC

- Pentium or K6 - class processor (266Mhz or higher)
- Windows 98 Second Edition or later
- 64MB of RAM
- Available USB 2.0 and FireWire ports

Specifications

Function	GUH420	Dimensions	GUH420
Housing		Unit Dimensions	
Case	Plastic	Height	5.9 in (15 cm)
Power		Depth	1.18 in (3 cm)
Voltage	5.0V	Width	3.42 in (8.7 cm)
Amps	2.6A	Unit Package Dimensions	
Power Consumption	5.0V - 2.6A	Height	10.75 in (27.3 cm)
Ports	4 USB 2.0 3 FireWire	Width	7.95 in (20.2 cm)
Operating Temperature	20 to 50 degrees (Celsius)	Depth	3.74 in (9.5 cm)
Storage Temperature	0 to 70 degrees (Celsius)	Master Carton	
Operating System Support	Windows®, 98SE, 2000, ME, XP, MAC OS 8.6 or greater	Height	12.0 in (30.5 cm)
FireWire Specification	IEEE 1394-1995, P1394a (rev 1.1) and OHCI Interface specification 1.0 compliant.	Width	16.8 in (42.8 cm)
USB Specification	USB 1.1 and 2.0 compliant	Depth	18.3 in (46.4 cm)
Transfer Rate	400 mbps - 480 mbps	Master Carton Qty.	12
Humidity	20-80% RH, (Non Condensing)	Weight	
Cable Length	6 ft. (1.83 m.)	Master Carton Wt.	20.78 Kg (9.43 Kg)
Power Connections	DC adapter (included)	Unit Pack Wt.	1.18 lb (0.54 Kg)
Power Adaptor Part #	100-240VAC Switching (JODEN)	Unit Wt.	0.32 lb (0.15 Kg)