

GVC301

HD to VGA Adapter with Audio, with 3 HD Cables for Phone, Tablet and Computer



IOGEAR's GVC301 is a high performing single port HD to VGA converter which allows you to connect your HD enabled device and output to an analog VGA display with support for analog and digital (optical) TOSlink audio out. Convenient compact size makes it an easy fit to any solution set up.

Includes 3 HD cables for Phone, Tablet and Computer:

- 1 x Micro HD Type D to HD Type D Cable
- 1 x Micro HD Type D to HD Type C Cable
- 1 x Micro HD Type D to HD Type A Cable

Great for commercial and home applications where older projectors, monitors and analog devices are being used.

- Connects a digital HD source to an analog VGA display with digital and analog audio support
- Works with Laptops / Computers, Tablets, smartphones and other HD devices
- Audio support with analog and digital (optical) connections for 2.1 stereo audio
 - 3.5mm jack
 - TOSLink (optical)
- Supports Analog Video output up to UXGA and 1080p
- Supports pixel clock rate from 25MHz to 165MHz
- Includes 3 HD cables to fit most HD devices - Micro HD Type D to HD Type A, C and D cables
- Plug-n-Play easy set up




How does it work?

■ Connect your HD Computer / Smartphone / Tablet to the HD port

■ Connect your VGA monitor or projector to the VGA port

■ Choose digital or analog audio via the TOSLink port or 3.5mm jack for your audio speakers

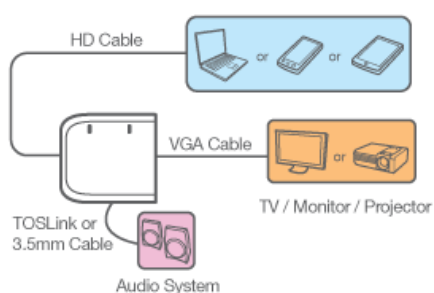

Requirements

- **System**
 - Windows® XP, Windows® Vista (32 / 64-bit), Windows® 7
- **Media Source**
 - HD Output
- **Display**
 - VGA Input
- **Audio**
 - 3.5mm Audio
 - TOSLink (optical)

Package Contents

- 1 x HD to VGA Adapter with Audio
- 1 x Micro HD Type D to HD Type A Cable
- 1 x Micro HD Type D to HD Type C Cable
- 1 x Micro HD Type D to HD Type D Cable
- 1 x 3.5mm M to M audio cable (1.8m)
- 1 x USB to DC Cable
- 1 x Quick Start Guide
- 1 x Warranty Card

Specifications

Function	GVC301
Connectors (Input)	Standard HDMI (A-Type HDMI)
Connectors (Output)	VGA Connector (female), 1x 3.5mm stereo jack (female), TOSlink out port
Frequency	Pixel clock rate from 25 MHz to 165 MHz
Power Adapter	5V/1A DC
Power Consumption	320mA, 1.6 Watts
Resolution	Resolutions Supported: 1920 x 1080, 1680 x 1050, 1600 x 1200, 1440 x 900

Dimensions	GVC301
------------	--------

Unit Dimensions

Height	0.7in
Depth	1.77in
Length	1.85in

Unit Package Dimensions

Width	7.5in
Height	5.5in
Depth	1.75in

Master Carton

Width	12.25in
Height	11.5in
Depth	13.75in
Master Carton Qty.	24

Weight

Master Carton Wt.	13.9lbs
Unit Pack Wt.	.55lbs
Unit Wt.	1.59 oz.