


GVE130V2

## VGA Cat 5e / Cat 6 Extender Kit with Audio

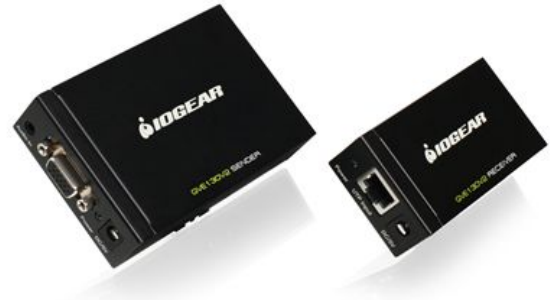

### VGA Cat 5e / Cat 6 Extender with Audio

Extend the reach of your VGA video with IOGEAR's VGA Video Extension over Cat 5e / Cat 6 with Audio Kit. The VGA video and audio extender kit includes a local sender unit and a remote receiver unit, providing an out-of-the-box, single cable solution. Ideal for environments where VGA video and audio must be transmitted over longer distances of up to 650ft (200m).


The VGA Cat 5e / Cat 6 Extender Kit with Audio is ideal for any installation where a remote VGA display needs to reside in a separate setting, but you want the local VGA display and system equipment kept in an environmentally friendly location.

- Extends VGA video and stereo audio signals up to 650ft (200m) over one solid Cat 5e / Cat 6 cable
- High resolution video of up to 1920x1080
- Adjustable GAIN and PEAK to adjust for longer distance runs
  - GAIN: Brightness adjustment
  - PEAK: Skew adjustment
- Dual video output: Supports a local and remote display
- Works with monitors, projectors, HDTVs and flat panels
- Sturdy and compact design for long lasting reliability and easy placement
- Simple Plug-n-Play Installation



**How does it work?**

- Connect your desktop computer, local monitor and speakers to the "Sender" unit
- Extend the distance between the "Sender" and "Receiver" units with a single Cat 5e / Cat 6 cable up to 650ft (200m)
- Connect your remote monitor and speakers to the "Receiver" unit

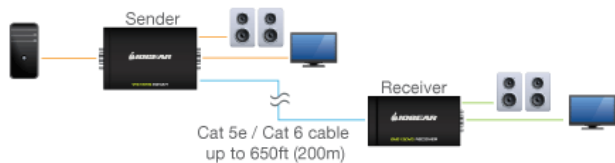**Requirements**

- **Computer:**
- VGA video output
- Audio output
- 
- **Displays:**
- 2 VGA Displays
- 
- **Audio:**
- 3.5mm Jack
- 
- **Cables:**
- CAT 5e / Cat 6 cable
- Male to Male VGA cables
- 3.5mm Stereo Audio cable

**Package Contents**

- 1 x VGA Extender Sender Unit
- 1 x VGA Extender Receiver Unit
- 2 x Power Adapters
- 1 x Sender Mounting Hardware
- 1 x Quick Start Guide
- 1 x Warranty Card

**Specifications**

Function	GVE130V2	Dimensions	GVE130V2
<b>Frequency</b>	60Hz / 75Hz / 85Hz	<b>Unit Dimensions</b>	
<b>Resolution</b>	Up to 1920x1080	Height	Sender : 1" (2.5cm) Receiver: 0.9" (2.2cm)
<b>Environment</b>		Depth	Sender: 2.6" (6.5cm) Receiver: 1.7" (4.3cm)
Operation Temperature	0? to +70?	Length	Sender: 4" (10.2cm) Receiver: 2.6" (6.5cm)
Storage Temperature	-10? to +80?	<b>Unit Package Dimensions</b>	
Humidity	Operating: 10% to 85 % RH (no condensation). Storage: 5% to 90 % RH (no condensation)	Width	8.8" (22.2cm)
<b>Connectors</b>		Height	2.1" (5.4cm)
Audio Input	3.5mm Stereo	Length	7.5" (19.1cm)
Video Input	VGA (Female 15pin)	<b>Master Carton</b>	
Audio Output	3.5mm Stereo	Width	9.5" (24.1cm)
Video Output	VGA (Female 15pin)	Height	8.5" (21.6cm)
Link	UTP / Cat 5e / Cat 6 Jack	Depth	13.3" (33.7cm)
Power	DC Jack	Master Carton Qty.	6
<b>Power Supply</b>	5V@2A, max 5W	<b>Weight</b>	
<b>Power</b>		Master Carton Wt.	9.9lb (4.5kg)
Amps	2A	Unit Pack Wt.	1.5lb (.66kg)
Voltage	DC 5V	Unit Wt.	.70 lb (.32 kg)