

GWHDBBKIT

Wireless HD TV Connection Kit

- Transmits High Definition Video and Audio up to 150 ft.
- Supports resolutions of up to 1080p @ 60Hz
- Supports Infrared (IR) Remote signal transmission to control source device
- Plug-N-Play solution
- HDMI 1.4V and HDCP Compliant



Wireless HDMI® Video up to 150 ft.

With support for full HD resolutions up to 1080p @ 60Hz, you can place your HDTV or HD projector anywhere up to 150 ft. wirelessly from the video source without sacrificing picture and sound quality. Enjoy a stunning audio/video experience with the convenience of wireless HDMI and the flexibility to eliminate cable clutter and move your TV to the patio or den for the big game or parties. Effectively transmit powerful long-range digital video across wide open spaces and living areas up to 150 ft.* Save the time and expense of hiring installers to run HDMI cables through the ceiling and walls.


Plug-N-Play

The Wireless HD TV Connection Kit comes with everything you need inside the box to get started quickly. The kit includes two (2) compatible HDMI cables, so there is no need to worry about shopping for the right cable. Connect the HDMI cables between your source video device and the HDMI transmitter, then between the HDMI receiver and your TV. Plug in power, and you are ready to enjoy your video content.

Setting up the Kit is hassle-free and does not require a Wi-Fi network or complicated security configurations. The included transmitter and receiver come ready with security enabled and are paired to create an independent wireless network connection.

- Transmits High Definition Video and Audio up to 150 ft.
- Supports resolutions of up to 1080p @ 60Hz
- Supports Infrared (IR) Remote signal transmission to control source device
- Plug-N-Play solution
- HDMI 1.3 and HDCP Compliant
- WPA security protection - already paired
- Applications:
 - living room
 - patio
 - man/lady cave
 - sporting events
 - garage



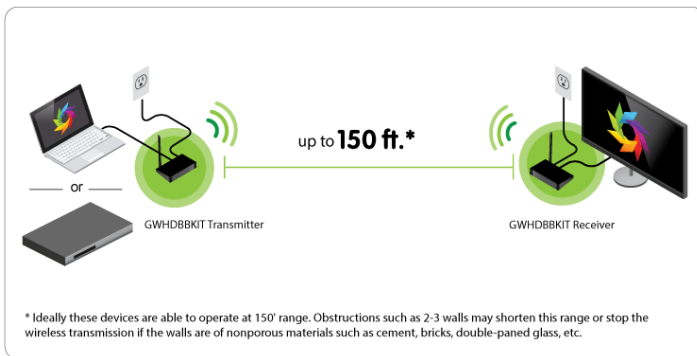

Requirements

- HDMI Source Device
- TV or Projector with HDMI Input

Package Contents

- 1 x GWHDKIT11 Transmitter
- 1 x GWHDKIT11 Receiver
- 2 x 3 Foot HDMI Cable
- 1 x IR Blaster Extension cable
- 1 x IR Receiver Extension cable
- 2 x 5VDC/2A Switching Power Supply
- 1 x Quick Start Guide

Specifications

| Function | GWHDDBKIT |
|------------------------------|---|
| Display Output | |
| HDMI | v 1.3 |
| Voltage | switching 100-240 VAC Input, 5VDC/2A Output |
| Power Consumption | TX <7W RX <5W |
| Video Resolution | 480i@60Hz, 576i @ 50Hz, 576p @ 50Hz, 720p @ 50/60Hz, 1080i @ 50/60Hz, 1080p @ 50/60Hz |
| Audio | |
| Codec | PCM Stereo |
| Transfer Rate | Max 10.2 Gbps |
| Cable Length | <16 ft (AWG26 HDMI1.3 cable standard) |
| Operating Temperature | 32 - 122 F |
| Storage Temperature | 14 F - 158 F |
| Environment | |
| Humidity | 0 - 90% |
| Video Streaming | H.264 <200ms Latency |
| Connectors | |
| Video Input | HDMI |
| Video Output | HDMI |
| Housing | |
| Case | Plastic |
| Infrared | |
| Frequency | 20-60Hz |
| LEDs | |
| Association | HDMI input and output connection state |
| WLAN | Transmitter and Receiver wireless connection state |
| Power Adapter | switching 100-240 VAC Input, 5VDC/2A Output |
| Warranty | 1 - Year |
| Radio Frequency | 5.8 GHz |
| Operating Range | 150 feet |

| Dimensions | GWHDDBKIT |
|--------------------------------|---------------|
| Unit Dimensions | |
| Height | 0.91 in |
| Length | 4.72 in |
| Depth | 3.15 in |
| Inner Pack | |
| Height | |
| Length | |
| Width | |
| Inner Pack Qty. | 3 |
| Unit Package Dimensions | |
| Height | 4.33 in |
| Width | 9.45 in |
| Depth | 6.93 in |
| Master Carton | |
| Height | 9.84 in |
| Width | 14.25 in |
| Depth | 13.39 in |
| Master Carton Qty. | 6 |
| Weight | |
| Master Carton Wt. | 12.35 lb |
| Inner Pack Wt. | |
| Unit Pack Wt. | 1.55 lb |
| Unit Wt. | 0.40 lb (x 2) |