

GWHDKIT11

Wireless HD TV Connection Kit



Eliminate Cables Without Sacrificing HD Quality

With support for Full HD resolutions up to 1080p @60fps, you can place your HDTV or HD projector anywhere up to 150 ft. wirelessly from the video source without sacrificing picture and sound quality. Enjoy a stunning audio/video experience with the convenience of wireless transmissionand the flexibility to eliminate cable clutter and move your TV to the patio or den for the big game or parties. Effectively transmit powerful long-range digital video across wide open spaces and living areas up to 150 ft. Save the time and expense of hiring installers to run HDMI cables through the ceiling and walls.

Plug-n-Play

The Wireless HD TV Connection Kit comes with everything you need inside the box to get started quickly. The kit includes 2 compatible HDMI cables, so there is no need to worry about shopping for the right cable. Connect the HDMI cables between your source video device and the HDMI transmitter and between the HDMI receiver and your TV. Plug in power, and you are ready to enjoy your video content.

Setting up the Kit is hassle-free and does not require a Wi-Fi network or complicated security configurations. The included transmitter and receiver come ready with security enabled and are paired to create an independent wireless network connection.

- Transmits High Definition Video and Audio up to 150ft
- Supports resolutions of up to 1080p @ 60fps
- Supports Infrared (IR) Remote signal transmission to control source device
- · Plug-N-Play solution


- HDMI 1.3V and HDCP Compliant
- WPA security protection already paired
- · Applications:
 - living room
 - o patio
 - o man/lady cave
 - o sporting events
 - garage









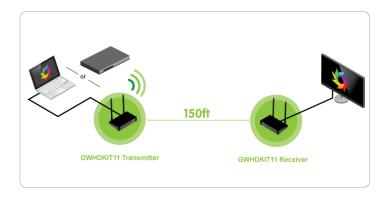

Requirements

Package Contents

- HDMI Source Device
- TV or Projector with HDMI Input
- 1 x GWHDKIT11 Transmitter
- 1 x GWHDKIT11 Receiver
- 2 x 3 Foot HDMI Cable
- 1 x IR Blaster Extension cable
- 1 x IR Receiver Extension cable
- 2 x 5VDC/2A Switching Power Supply
- 1x Quick Start Guide



Specifications

Function	GWHDKIT11	Dimensions	GWHDKIT11
Display Output		Unit Dimensions	
HDMI	1.3	Height	0.91 in
Connectors		Depth	3.15 in
Video Input	HDMI Interface	Length	4.72 in
Video Output	HDMI Interface	Unit Package Dimensions	
Housing		Width	9.45 in
Case	Plastic	Height	4.33 in
Infrared		Depth	6.93 in
Frequency	20-60Hz	Master Carton	
LEDs		Width	14.25 in
Association	HDMI input and output connection state	Height	9.84 in
WLAN	Transmitter and Receiver wireless connection state	Depth	13.39 in
Power		Master Carton Qty.	6
Amps	2.0	Weight	
Voltage	5 DC	Master Carton Wt.	12.35 lb
Power Consumption	Transmitter 7W/Receiver 5W	Unit Pack Wt.	1.55 lb
Power Supply	switching 100-240 VAC Input, 5VDC/2A Output	Unit Wt.	0.40 lb
Video Resolution	1080P@60Hz		
Warranty	1 - Year		
Audio			
Codec	PCM		
Video Streaming	Up to 10.2 Gbps		
Radio Frequency	5.8 GHz		
Operating Range	Up to 150 feet		
Environment			
Operation Temperature	32-122F		
Storage Temperature	14-158F		