

GWHDKITD

Wireless Display Connection Kit

- Transmits High Definition Video and Audio up to 75 ft.
- Supports resolutions of up to 1080p @60Hz
- Supports Infrared (IR) Remote to control source device
- Plug-n-Play solution
- WPA security protection - already paired



Wireless HDMI Video up to 75 Ft.

With support for full HD resolutions up to 1080p @60Hz, wirelessly place your HDTV or HD projector anywhere up to 75 ft.* from your video source without sacrificing picture and sound quality. Enjoy a stunning audio/video experience with the convenience of wireless HDMI and the flexibility to eliminate cable clutter and move your TV to the patio or den for the big game or parties. Effectively transmit powerful long-range digital video across wide open spaces and living areas up to 75 ft.* Save the time and expense of hiring installers to run HDMI cables through the ceiling and walls.


Plug-N-Play

The Wireless Display Connection Kit comes with everything you need inside the box to get started quickly. The kit includes one HDMI cable and one HDMI extender cable, so there is no need to worry about shopping for the right cable. Plug the wireless transmitter directly into your source device's HDMI port, then simply plug the wireless receiver into your TV with the included HDMI cables.

Setting up the Kit is hassle-free and does not require a Wi-Fi network or complicated security configurations. The included transmitter and receiver come ready with security enabled and are paired to create an independent wireless network connection.

- Transmits High Definition Video and Audio up to 75 ft.
 - Supports resolutions of up to 1080p @60Hz
 - Supports Infrared (IR) Remote to control source device
 - Plug-n-Play solution
 - HDMI 1.3 and HDCP Compliant
 - WPA security protection - already paired
- Applications:
 - living room
 - patio
 - man/lady cave
 - sporting events
 - garage
 - The transmitter is a compact dongle that offers mobility and can be connected to a laptop that doesn't need to be at a fixed location



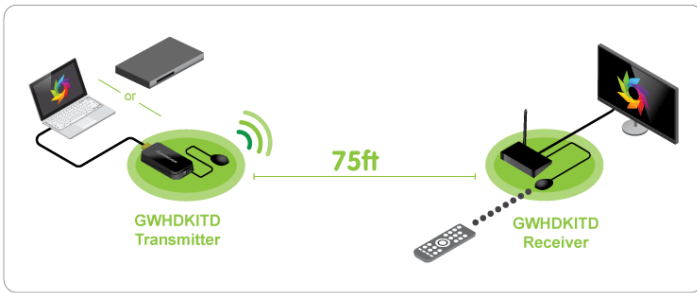

Requirements

- HDMI output from video source
- HDMI input to Display

Package Contents

- 1 x GWHDKITD Transmitter Dongle
- 1 x GWHDKITD Receiver
- 1 x 3 Ft. HDMI Cable
- 1 x USB power cable for Transmitter Dongle
- 1 x HDMI Male-to-Female Cable Extender
- 1 x IR Blaster Extension cable
- 1 x IR Receiver Extension cable
- 1 x 5VDC/2A Switching Power Supply
- 1 x Quick Start Guide

Specifications

Function	GWHDKITD	Dimensions	GWHDKITD
Connectors		Unit Dimensions	
Video Input	HDMI 1.3	Height	0.91 in
Video Output	HDMI 1.3	Depth	3.15 in
Power	Input 100~240 VAC, 50/60Hz, 0.3A Tx input 5VDC/1A Rx input 5VDC/2A	Length	4.72 in
Audio Output	PCM Stereo	Unit Package Dimensions	
Video Resolution	1080p @ 50/60Hz	Width	9.45 in
Video Streaming	H.264 <200ms Latency	Height	4.33 in
Radio Frequency	5G	Depth	6.93 in
Operating Range	75 ft.	Master Carton	
Infrared		Width	14.25 in
Frequency	20 - 60Hz Wide Range	Height	9.84 in
Housing		Depth	13.39 in
Case	Plastic	Master Carton Qty.	6
Power Adapter	switching 100-240 VAC Input, 5VDC/2A Output	Weight	
Operating Temperature	32~104°F (0~40°C)	Master Carton Wt.	12.35 lb
Storage Temperature	- 4~158°F (-10~70°C)	Unit Pack Wt.	1.55 lb
Humidity	0 - 90%	Unit Wt.	0.40 lb
Warranty	1-Year		
Power Consumption	Transmitter <3W, Receiver <5W		