

GWLRVGATX

Ultra Long Range Wireless VGA Transmitter



600ft - Wireless VGA Transmitter

The Ultra Long Range Wireless VGA Transmitter is the latest addition to IOGEAR's extensive and award winning Wireless Video lineup. Wirelessly transmit A/V signals from your source device such as PC to a display or projector at never before possible distances of up to 600ft (183m) line of sight.

Versatile sources and displays combination


This wireless VGA Transmitter works with receivers with HDMI output (GWLRHDRX, sold separately), or receivers with DVI output (GWLRDVIRX, sold separately), or receivers with VGA output (GWLRVGARX, sold separately). ** Ideal for application with mixed VGA, DVI, and HDMI displays.

Cut the Cord and Cut the Cost

With support for HD resolutions up to 1080p, you can cut the video cables without sacrificing picture quality paired with a receiver with HDMI out (GWLRHDRX, sold separately), or a receiver with DVI out (GWLRDVIRX, sold separately), or a receiver with VGA out (GWLRVGARX, sold separately). Enjoy a stunning video experience with the convenience of wireless and the flexibility to network your environment the way you want without investing in expensive wiring. Effectively eliminate cable clutter and transmit powerful long range digital signals across wide open spaces, up to 600ft. No need to run expensive video cables at long distances.

- Transmits High Definition Video from up to 600ft away
- Supports resolutions of up to 1080p @ 60fps
- Plug-N-Play solution
- Mix & Match between DVI, HDMI and VGA receivers
- Perfect for retail and commercial applications



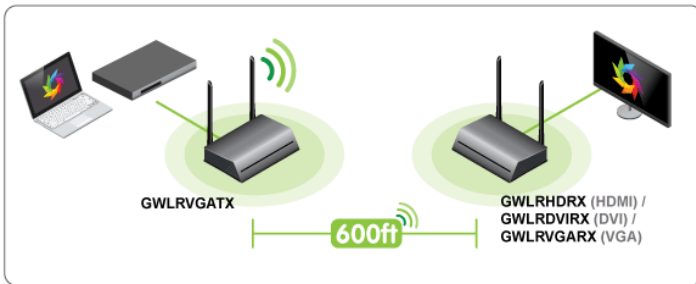

Requirements

- **Display**
- Display or Projector with VGA, or DVI, or HDMI Input
- **Media Source**
- 1 VGA Output

Package Contents

- 1 x Ultra Long Range Wireless Transmitter with VGA
- 1 x VGA Cables
- 1x Audio Cable
- 1 x Power Adapter
- 1 x Quick Start Guide
- 1 x Warranty Card

Note: GWLRDVIRX is required for displays with DVI input; GWLRVGARX is required for displays with VGA input; GWLRHDXR is required for displays with HDMI input.

Specifications

Function	GWLRVGATX	Dimensions	GWLRVGATX
Connectors		Unit Dimensions	
Video Input	RGBHV	Height	1.75 in
Power	1 x Power Jack	Depth	4.50 in
Video Resolution	1920x1080@60Hz;1680x1050@60Hz;1440x900@60Hz; 1360x768@60Hz;1280x1024@60Hz;1280x960@60Hz; 1280x720@60Hz;1024x768@60Hz;800x600@60Hz	Length	7.63 in
Video Streaming	<200ms Latency H.264	Unit Package Dimensions	
Frequency	5 GHz	Width	10.25 in
Antenna Type	Dual Hi Gain 5 DBi	Height	6.25 in
Operating Range	Up to 600 ft	Depth	3.75 in
Housing		Master Carton	
Case	Metal	Width	11 in
Power		Height	14.50 in
Amps	3 A	Depth	13 in
Voltage	5 V	Master Carton Qty.	6
Warranty	1 Year	Weight	
Operating Temperature	32 - 140 F	Master Carton Wt.	16.85 lb
Power Consumption	9 W	Unit Wt. w/accessories	2.60 lb
Humidity	10 - 95% Non-Condensing	Unit Wt.	1.40 lb
Audio			
Audio Output	L/R Stereo Audio		
Codec	PCM		