

## GWU637

Universal Wi-Fi N Transmitter- Ethernet to Wi-Fi N 300Mbps



## Wireless Ethernet - Convert Ethernet to Wi-Fi On Any Device

Enjoy the freedom of Wi-Fi connectivity for any of your Ethernet enabled devices at home or in the office with IOGEAR's Ethernet-2-WiFi Universal Wireless Adapter. This is the ideal solution for devices that do not have built-in Wi-Fi and is universally compatible with any device with an Ethernet port. Avoid the clutter of cables and connect devices such as HDTVs, game consoles, and Blu-ray players to your Wi-Fi network.

## Turn Legacy Gadgets, Printers, VOIP into High Speed Wi-Fi Enabled Devices

Older laptops, A/V receivers, network printers and other Ethernet only devices leave you at the mercy of a hardwired data connection. With IOGEAR's Ethernet-2-WiFi Universal Wireless Adapter, you can breathe new life into your legacy electronics by giving them Wi-Fi capability.

- Wirelessly connect Ethernet enabled devices to most Wi-Fi network\*
- Turn legacy electronics into high-speed Wi-Fi enabled devices
- Supports transfer speeds of up to 300Mbps on 2.4GHz networks
- Compatible with 802.11b/g/n network standards
- Small form factor for ease of placement
- Push-button Wi-Fi Protected Setup™ (WPS) simplifies secure connections to existing Wi-Fi networks

• Supports WEP, WPA, WPA2, TKIP and AES encryption

\*Not Compatible with Enterprise Authentication

\*\*Not Compatible with Mesh Networks

\*\*\*GWU637 is designed to connect directly to a wireless router. Hotspots, repeaters and access points are not guaranteed to function properly.

\*\*\*\* If not using WPS then use either Internet Explorer if running Windows or Safari if running a Mac. Chrome or Firefox will not work correctly in most cases until the firmware update is uploaded










(ex. G oogle WiFi)

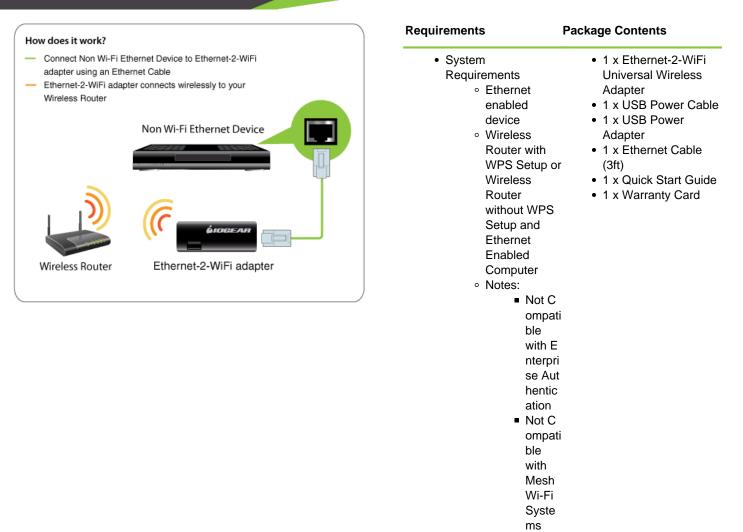



## Specifications

Function	GWU637	Dimensions	GWU637
Operating Temperature	0 ~ 50°C	Unit Dimensions	
Storage Temperature	-10 ~ 70°C	Height	1" (2.5cm)
Humidity	5 ~ 90% (Non Condensing)	Length	2.56" (6.5cm)
Transmission Power	IEEE 802.11n: <13dBm, IEEE 802.11b: <17dBm, IEEE 802.11g: <15dBm	Depth	0.75" (1.9cm)
Frequency Band	2.4GHz ISM Band	Inner Pack	e# (22.2)
Modulation	BPSK / QPSK / 16-QAM / 64-QAM	Height	8" (20.3cm)
Data Rate	1, 2, 5.5, 6, 9, 11, 12, 18, 24, 36, 48, 54, 60,	Length	14.25" (36.2cm)
	90, 120 and up to 300Mbps	Width	9.75" (24.8cm)
Security	64-bit or 128-bit WEP / TKIP / AES / WPA / WPA2	Inner Pack Qty.	6
Operating Range	Indoor: up to 100m, Outdoor: up to 180m	Unit Package Dimensions	
Encryption	64-bit or 128-bit WEP / TKIP / AES / WPA / WPA2	Height	9.06" (23.01cm)
		Width	6.37" (16.2cm)
Antenna Type	2T2R	Depth	2.19" (5.5cm)
Standards	IEEE 802.11b/g/n, 802.3, 802.3u	Master Carton	
Network Interface	One 10/100 BaseT with RJ45 port (WAN/LAN)	Height	17.32" (44cm)
Power		Width	10.8" (27.5cm)
Amps	5V	Depth	15.94" (40.5cm)
Voltage	500mA	Master Carton Qty.	12
Input Rating	100-240V ~ 50/60Hz	Weight	
Power Connections	Micro USB	Master Carton Wt.	9.3 lbs (4.2kg)
	MIGO OOD	Inner Pack Wt.	4.2 lbs (1.9kg)
		Unit Pack Wt.	0.55 lbs (0.26kg)
		Unit Wt.	0.05 lbs (0.02kg)