

GUB211

## 2-Port USB 2.0 Printer Auto Sharing Switch




IOGEAR's USB 2.0 Printer Auto Sharing Switch enables two PCs and/ or Macs to easily share\* one USB printer or multi-function printer.. No more plugging and unplugging between your computers. Simply send the print job and the switch automatically makes the swap for you.

- Easily share a USB device without network configuration
- Share one USB printer between two computers with auto switch\*
- Works with PC and Mac computers
- Backwards compatible with USB 1.1
- Active-port LED indicators show which computer has USB access

- Bus Powered - No external power supply needed

\* Automatic switch function is software based and only available with USB printer or the printer function of a multi-function printer. For connecting and using other type of USB devices, it requires installing the included software and perform the switch using the application. This device does not support USB webcams.



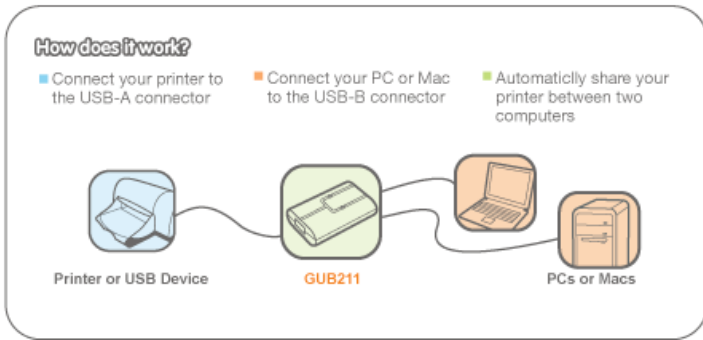

**Requirements**

**Package Contents**

**PC Users**

- Windows® 10 (Up to version 1809), Windows® 8.1, Windows® 8, Windows® 7, Windows Vista®, Windows XP® (SP2)
- Available USB Port

- 1 x USB 2.0 Sharing Switch
- 2 x 5 ft USB A-B Cable
- 1 x Installation CD\*
- 1 x Quick Start Guide
- 1 x Registration / Warranty Card

**Mac Users**

- Mac OS X 10.3.9+ - Mac OS X 10.13.3
- Available USB Port

\* The included CD is a mini size diskette, and it is recommended not to insert the mini size CD into the slot-loading CD ROM drive to avoid damaging the slot-loading CD ROM drive

\*Mac OS X 10.10 driver available for download

**Specifications**

|                                 |  |                                |         |
|---------------------------------|--|--------------------------------|---------|
| Function                        | GUB211   | Dimensions                     | GUB211  |
| <b>Computer Interface</b>       | USB Type-B                                       | <b>POP Information</b>         |         |
| <b>Device Connection</b>        | USB Type-A                                       | 10" Peg Hook                   | 4       |
| <b>LEDs</b>                     |  | 6" Peg Hook                    | 3       |
| Port Status                     | Yes  | <b>Unit Dimensions</b>         |         |
| <b>Operating System Support</b> | Windows XP / Vista / 7 ; Mac OS 10.3 and up      | Width                          | 2.75 in |
| <b>Port Selection</b>           | Auto printer detection / manual device selection | Height                         | 0.75 in |
| <b>Power Supply</b>             | USB bus power                                    | Length                         | 1.75 in |
| <b>Power Consumption</b>        | 5V; 120mAh                                       | <b>Unit Package Dimensions</b> |         |
| <b>USB Specification</b>        | USB 1.1 / 2.0 compliant                          | Width                          | 5.24 in |
| <b>Operating Temperature</b>    | 32°F ~ 104°F                                     | Height                         | 8.1 in  |
| <b>Storage Temperature</b>      | 32°F ~ 140°F                                     | Depth                          | 2.4 in  |
|                                 |  | <b>Master Carton</b>           |         |
|                                 |  | Width                          | 9.2 in. |
|                                 |  | Height                         | 9 in    |
|                                 |  | Depth                          | 5.6 in  |
|                                 |  | Master Carton Qty.             | 6       |
|                                 |  | <b>Weight</b>                  |         |
|                                 |  | Master Carton Wt.              | 3.5 lb  |
|                                 |  | Unit Pack Wt.                  | 0.4 lb  |
|                                 |  | Unit Wt.                       | 0.2 lb  |