

GUB211W6

## 2-Port USB 2.0 Printer Auto Sharing Switch



IOGEAR's USB 2.0 Printer Auto Sharing Switch enables two PCs and/ or Macs to easily share\* one USB printer, multi-function printer, or USB device. No more plugging and unplugging between your computers. Simply send the print job and the switch automatically makes the swap for you.

- Automatically switch\* between two computers when connecting to a USB printer
  - Switch any other USB devices with the easy-to-use software interface\*
  - Supports PC and Mac computers
  - USB 2.0 - High speed support and USB 1.1 backward compatible
  - Active-port LED indicators to show which computer has USB access
  - Easily share a USB device without network configuration
  - Bus Powered - No external power supply needed
- \* Automatic switch function is software based and only available with USB printer or the printer function of a multi-function printer. For connecting and using other type of USB devices, it requires installing the included software and perform the switch using the application. This device does not support USB webcams.

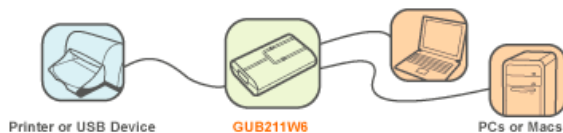


**How does it work?**

■ Connect your printer to the USB-A connector

■ Connect your PC or Mac to the USB-B connector

■ Automatically share your printer between two computers

**Requirements****PC Users**

- Windows XP® (SP2), Windows Vista®, Windows 7®, Windows® 8, Windows® 8.1, Windows® 10 (Up to version 1809),
- Available USB Port

**Mac Users**

- Mac OS X 10.3.9+\* ~ Mac OS X 10.13.3
- Available USB Port

\*Mac OS X 10.10 driver available for download

**Package Contents**

- 1 x 2-to-1 USB 2.0 Sharing Switch
- 2 x 5 ft USB A-B Cable
- 1 x Application CD
- 1 x Quick Start Guide
- 1 x Registration / Warranty Card

**Specifications**

Function	GUB211W6
<b>Computer Interface</b>	USB Type-B
<b>Device Connection</b>	USB Type-A
<b>LEDs</b>	
Port Status	Yes
<b>Operating System Support</b>	Windows XP / Vista / 7 ; Mac OS 10.3 and up
<b>Port Selection</b>	Auto printer detection / manual device selection
<b>Power Supply</b>	USB bus power
<b>Power Consumption</b>	5V; 120mAh
<b>USB Specification</b>	USB 1.1 / 2.0 compliant
<b>Operating Temperature</b>	32°F ~ 104°F
<b>Storage Temperature</b>	32°F ~ 140°F

Dimensions	GUB211W6
------------	----------

**POP Information**

10" Peg Hook	4
6" Peg Hook	3

**Unit Dimensions**

Width	2.75 in.
Height	0.75 in.
Length	1.75 in.

**Unit Package Dimensions**

Width	5.24 in.
Height	8.1 in.
Depth	2.4 in.

**Master Carton**

Width	9.2 in.
Height	9 in.
Depth	5.6 in.
Master Carton Qty.	6

**Weight**

Master Carton Wt.	3.5 lb.
Unit Pack Wt.	0.4 lb
Unit Wt.	0.2 lb