

GPAWC72W

## USB-C 72W 4-Port Charger [USB-IF]

- Centralized charging station for your USB mobile devices
- Charge (1) USB-C and (3) USB-A devices simultaneously
- Intelligent design provides just the right power for your devices
- Built-in protection against overcurrent and overvoltage
- Full range 100-240VAC voltage support



### Charge Multiple Devices Simultaneously

Charge up your most power-hungry USB-C devices such as a laptop, smartphone or tablet and up to three (3) USB-A peripherals with IOGEAR's USB-C 72W 4-Port Charger. This flexible, portable charger plugs into any standard outlet and is perfect for use anywhere you want to charge multiple devices at the same time.


### Big Power in a Compact Design

The USB-C 72W 4-Port Charger accommodates the power demands of USB-C devices such as a laptop or tablet with a charging capacity of up to 60W on its single port. Power up to three (3) USB-A devices simultaneously with a maximum charging capacity of 12W for the ultimate in charging efficiency. With its compact design, the 4-port charger easily finds a home on the kitchen counter, nightstand, in the office or on the road with you.

### Perfect for your Modern Mobility Devices

- Centralized charging station for your USB mobile devices
- Charge (1) USB-C and (3) USB-A devices simultaneously
- Intelligent design provides just the right power for your devices
- Built-in protection against overcurrent and overvoltage
- Full range 100-240VAC voltage support
- Compatible with most USB-C devices
- 1x USB-C port provides a total of 60W (5V/9V/12V/15V/20V @ 3A max) power
- 3x USB-A ports provide total of 12W (5V @ 2.4A max) power
- USB-IF Certified



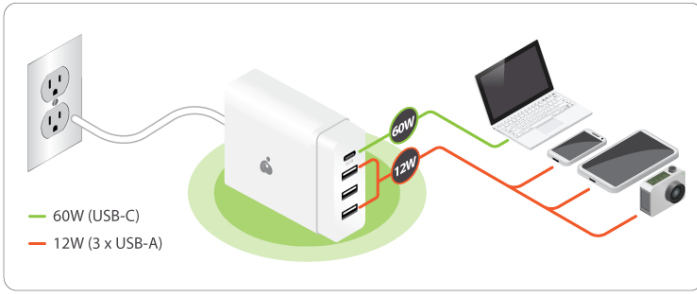

### Requirements

- Device powered via USB-C / USB-A

### Package Contents

- 1 x GPAWC72W
- 1 x Warranty Guide

## Specifications

Function	GPAWC72W	Dimensions	GPAWC72W
<b>Environment</b>		<b>Unit Dimensions</b>	
Humidity	5% ~ 90% RH	Height	2.83" (7.2 cm)
Operation Temperature	0~40°C	Length	3.54" (9cm), AC Cord: 48"
Storage Temperature	-20 ~ 80°C	Depth	1.06" (2.7 cm)
<b>Max Output Power</b>	72W	<b>Inner Pack</b>	
<b>Power Input Rating</b>		Height	6.3" (16cm)
Unit Power	100-240VAC 50/60Hz	Length	15" (38cm)
<b>Power Output Rating</b>		Width	4.72" (12cm)
Total DC Power Output	USB A: 5V/2.4A ; USB-C: 5V,9V,12V,15V,20V/3A	Inner Pack Qty.	6
<b>Power Management</b>		<b>Unit Package Dimensions</b>	
Efficiency	A Port: >=80% ; C Port: >=81.4%	Height	5.67" (14.4cm)
Ripple Noise	<=250mV	Length	4.33" (11cm)
<b>Warranty</b>		Width	2.36" (6cm)
Warranty	1-Year	<b>Master Carton</b>	
		Height	13.39" (34cm)
		Width	15.75" (40cm)
		Depth	10.24" (26cm)
		Master Carton Qty.	24
		<b>Weight</b>	
		Master Carton Wt.	20.5lb (9.3kg)
		Inner Pack Wt.	4.85 lb (2.2kg)
		Unit Pack Wt.	0.75lb (0.34kg)
		Unit Wt.	0.65lb (0.29kg)