

GUH3C22P

# USB-C 10G 4-Port Hub w/ 100W Power Delivery 3.0 Pass-Through



- Expand any USB-C port's data & charging functionality
- Charge laptop & connected devices through 2 ports
- 2x USB-C 3.1 Gen 2 ports; 1x charges to 100W via power pass-through
- 2x USB 3.0 Type-A ports; 1x BC1.2 charging port (1.5A)
- Ultra-fast 10Gbps data transfer rate

## 10G Hub Expands a Single USB-C Port

This 4-Port USB Hub bridges the gap between your computer and older USB technology devices. Expand a single USB-C port to connect and charge a smartphone and tablet, digital camera and peripherals such as a printer, external hard drive and much more. With the USB 3.1 Gen 2 specification, this compact hub delivers lightning-fast connectivity and file transfer capabilities. Transfer high bandwidth data like large files, photos, and video at 10Gbps speeds.

- Expand any USB-C port's data & charging functionality
- Charge laptop & devices with up to 100W pass-through\*
- 2x USB-C 3.1 Gen 2 ports; 1x charges to 100W via power pass-through
- 2x USB 3.0 Type-A ports; 1x BC1.2 charging port (1.5A)
- Ultra-fast 10Gbps data transfer rate
- Compatible with Thunderbolt 3 (USB-C) enabled laptops & tablets

- Fast Role Swap provides safe operation for connected devices during power changes


\* Power Delivery pass-through requires USB-C charger from your laptop. A total of up to 85W can be charged to the laptop after deduction of 15W is used by the dock.

\*\* Pass-thru power delivered to the laptop is dependent upon the capacity of your USB-C power supply.

Ex. If your USB-C power supply is 60W, then the maximum power can be delivered to the laptop is  $60W - 15W = 45W$ .

If your power supply is 87W, then the maximum power can be delivered to the laptop is  $87W - 15W = 60W$ .



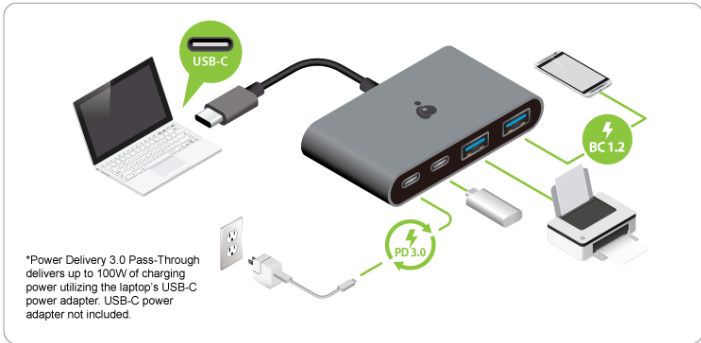

### Requirements

- USB-C (Thunderbolt 3 compatible) device
- Windows 7/8/8.1/10
- Mac OS X 10.7+
- Chrome OS

### Package Contents

- 1 x GUH3C22P
- 1 x Quick Start Guide
- 1 x Warranty Card

## Specifications

Function	GUH3C22P	Dimensions	GUH3C22P
<b>Upstream Port</b>		<b>Unit Dimensions</b>	
USB-C	USB 3.1 Gen 2	Height	1.65" (4.2cm) + 4.6" (11.6cm) SR cable
<b>Downstream Port</b>		Depth	0.55" (1.4cm)
USB-A	2x USB 3.0, 1 port supports BC1.2 charging (1.5A)	Length	2.95" (7.5cm)
USB-C	2x USB 3.1 supports data, 1 port supports Power Delivery 3.0	<b>Inner Pack</b>	
<b>Power</b>		Width	5.71" (14.5cm)
Power Delivery Pass-Thru	PD 3.0 / 100W (A total of up to 85W can be charged to the laptop after deduction of max 15W used by the dock)	Height	6.10" (15.5cm)
<b>Data Rate</b>		Length	7.67" (19.5cm)
Up to 10Gbps		Inner Pack Qty.	6
<b>Environment</b>		<b>Unit Package Dimensions</b>	
Humidity	10% to 85% RH (no condensation)	Height	5.67" (14.4cm)
Operation Temperature	0C to +45C	Depth	1.18" (3cm)
<b>Operating System Requirements</b>		Length	5.31" (13.5cm)
Mac	Mac OS X 10.7+	<b>Master Carton</b>	
Windows	Windows 7 / 8 / 8.1 / 10	Width	16.14" (41cm)
		Height	12.20" (31cm)
		Depth	6.89" (17.5cm)
		Master Carton Qty.	24
		<b>Weight</b>	
		Master Carton Wt.	6.61 lb (3kg)
		Inner Pack Wt.	1.1lb (0.5kg)
		Unit Pack Wt.	0.2lb (0.09kg)
		Unit Wt.	0.1lb (0.045kg)