

GCL1908WKITU

18.5" Widescreen Short Depth 8-Port LCD KVM Switch w/8x USB KVM cables




- Integrated VGA 8-port LCD KVM console with 18.5" widescreen LCD monitor & cables
- Single rail housing; top/bottom clearance for smooth operation in a 1U high system rack
- Control up to 128/256 computers by cascading up to 2 levels with IOGEAR's GCS1808 or GCS1716
- LCD monitor supports resolution of 1366 x 768 @60Hz
- Short depth design allows for rack-mounting in narrow spaces

8-Port Widescreen Short Depth LCD KVM Switch

IOGEAR's GCL1908WKITU, is an integrated 18.5" Widescreen LCD console with an 8-port KVM (keyboard, video, and mouse) switch with eight (8) USB KVM cables that offers secure access to eight (8) VGA, USB or PS/2 computers. The KVM supports both PS/2 and USB keyboards and mice for the connected computers and supports USB peripheral devices for the attached computers.

- Integrated VGA 8-port LCD KVM console with 18.5" widescreen LCD monitor & cables
- Single rail housing; top/bottom clearance for smooth operation in a 1U high system rack
- Control up to 128/256 computers by cascading up to 2 levels with IOGEAR's GCS1808 or GCS1716
- LCD monitor supports resolution of 1366 x 768 @60Hz
- Short depth design allows for rack-mounting in narrow spaces
- Supports VGA video input; supports an external console with USB/VGA connectors
- Built-in USB Type-A port on front panel for peripheral sharing HID devices
- Dual Interface - Supports computers with PS/2 or USB Keyboards and Mice
- Auto PS/2 and USB interface detection
- Keyboard and mouse emulation (PS/2 & USB) for smooth switching and simultaneously booting multiple computers even when the console's focus is elsewhere
- Console lock design enables the console drawer to remain securely locked away in position when not in use
- Computer selection via pushbuttons, hotkeys, and multilingual On Screen Display (OSD)
- Broadcast mode - enables to send commands from the console to all connected computers to perform simultaneous operations
- Two level password security - only authorized users can view and control computers
- Auto Scan Mode - enables continuous monitoring of user-selected computers
- Multilingual keyboard mapping supports English (US), English (UK), French, German, German (Swiss), Hungarian, Italian, Japanese, Korean, Russian, Spanish, Swedish, and Traditional Chinese
- Standard rack mount kit included
- Plug-n-Play
- Firmware Upgradable
- Hot Pluggable



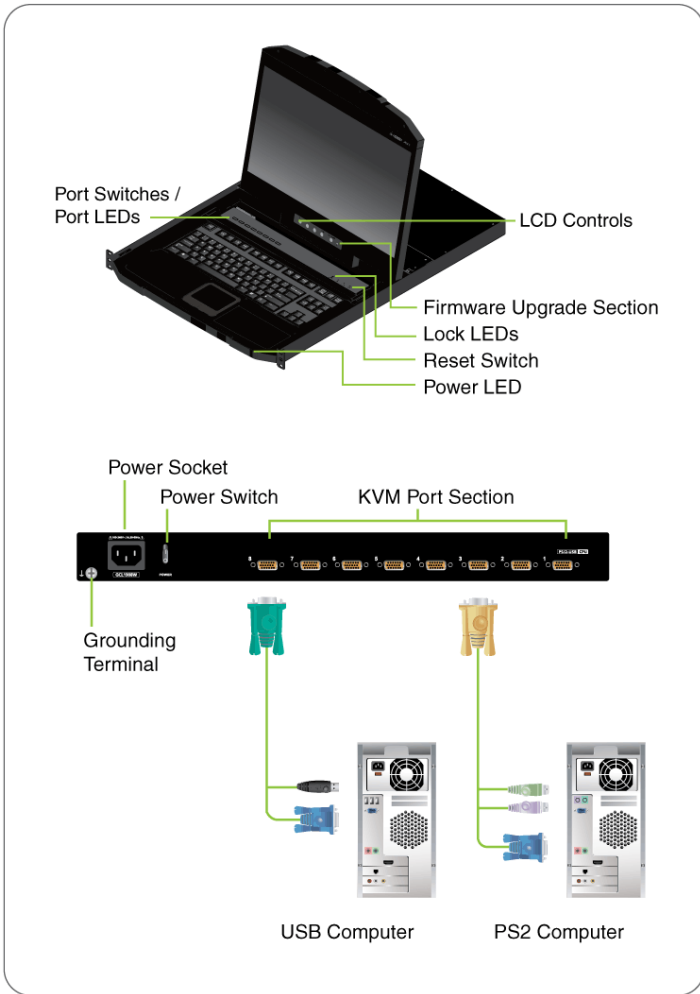

Requirements

Package Contents

Computers:

- VGA, SVGA, or MultiSync video graphics card with an HDB-15 port
- USB or PS/2 mouse and keyboard ports (6-pin mini DIN) or 1 USB port

- 1 x 8-Port 18.5" Widescreen Short Depth LCD KVM Switch
- 4 x USB KVM Cable (6ft - G2L5202U)
- 4 x USB KVM Cable (10ft - G2L5203U)
- 1 x PS/2 KVM Cable
- 1 x Firmware Upgrade Cable
- 1 x Grounding Wire
- 1 x Standard Rackmount Kit (Fits 1 6.6~28.3 Inch Depth)
- 1 x Power Cord
- 1 x Quick Start Guide

Specifications

Function	GCL1908WKITU
Computer Connections	
Direct	8
Daisy Chain or Cascading	128
Port Selection	
OSD, Hotkeys, Pushbuttons	
Connectors	
Computer/KVM	8 x SPHD-18 Male
USB-A	1 x USB Type A Female
Power	1 x 3-Prong AC Socket
Switches	
Reset	1 x Semi-recessed Pushbutton
Power	1 x Rocker Switch
F/W Upgrade	1 x Slide Switch
LCD Power	1 x LED Pushbutton (Orange)
LCD Adjustment	4 x Pushbutton
Port Selection	8 x Pushbutton
LEDs	
On Line	8 (Orange)
Power On	Dark Green
Emulation	
Keyboard	PS/2, USB
Mouse	PS/2, USB
Video Resolution	
1366x768@60Hz	
Scan Interval	
1 - 255 seconds	
Power Input Rating	
Per AC Power Inlet, 50/60Hz	100~240VAC. 50/60Hz, 1A
Power Consumption	
110V: 14.1W; 70BTU	
Environment	
Operation Temperature	0~40°C
Storage Temperature	-20~60°C
Humidity	0~80% RH; Non-condensing
Housing	
Case	Metal and Plastic

Dimensions	GCL1908WKITU
Unit Dimensions	
Height	1.7" (4.28 cm)
Length	24.9" (63.24 cm)
Width	18.9" (48.06 cm)
Master Carton	
Height	6.5" (16.51 cm)
Length	37.3" (94.74 cm)
Width	30.3" (76.96 cm)
Master Carton Qty.	1
Weight	
Master Carton Wt.	38.6 lb. (17.54kg)
Unit Wt.	23.2 lb. (10.5kg)