

GCS52DP

## 2-Port 4K USB DisplayPort Cable KVM Switch



- Switch between 2 DisplayPort computers
- Connect only 1 keyboard, 1 mouse and 1 monitor
- Cinema 4K Resolution up to 4096x2160 @30Hz
- No additional cables needed
- Self-explanatory installation and operation

### DisplayPort KVM - Switch Between 2 DisplayPort Computers

Easily switch between your two DisplayPort computers and control them with one monitor, one keyboard and one mouse. IOGEAR's 2-Port 4K USB Cable DisplayPort KVM Switch comes ready with built-in cables and is USB powered. Don't spend the extra money on features you don't need; this KVM offers the most efficient and affordable way to switch between your two DisplayPort computers. Hide the KVM anywhere and use the 6 ft. cable remote push-button to switch between the two connected computers.


### Optimal Resolution to Get Things Done

Experience incredible high-definition resolutions up to 4K resolutions 4096 x 2160 @ 30Hz with this simple, yet robust cable KVM. The 2-Port 4K USB DisplayPort Cable KVM Switch is designed with DisplayPort 1.1\* technology, perfect for those who need to get the job done in the office, at home and at school.

- DisplayPort computer switch
- Switch between 2 DisplayPort computers from a single keyboard, mouse, and DisplayPort1.1 monitor
- Cinema 4K resolution up to 4096 x 2160 @ 30Hz
- DisplayPort1.1 and HDCP compliant
- Computer switching via remote switch button
- Built-in cables
- Plug-n-Play
- Expand USB ports by adding a USB hub
- Bus powered\*
- Supports 7.1 HD audio
- Supports 2.1 analog audio

\*may require external power supply via micro USB port



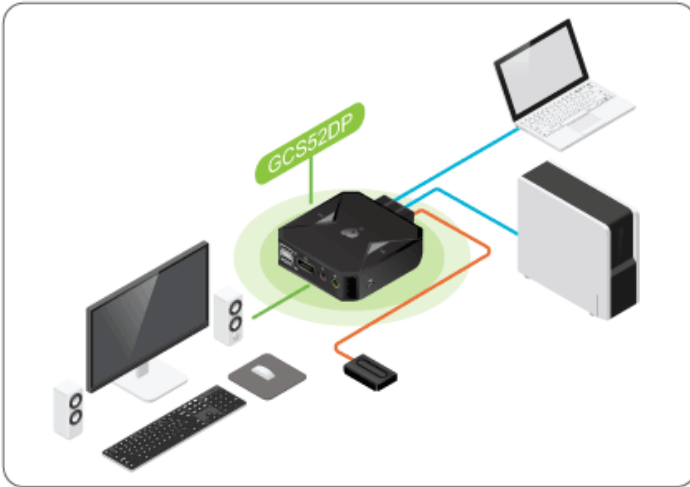

#### Requirements

#### Package Contents

- **Console**
- DisplayPort monitor
- Standard 104-key wired USB keyboard
- Standard 2 or 3 button wired USB mouse
- Speakers and Microphones (optional)
- **Computers**
- DisplayPort port
- USB Type-A port
- Audio ports (optional)
- **Operating Systems**
- Windows<sup>®</sup>7, 8.1, 10
- Mac OS X 9.0+
- Oracle<sup>®</sup> Solaris
- Linux<sup>®</sup>, UNIX, and other USB supported systems
- 1 x GCS52DP
- DisplayPort KVM
- 1 x Manual

## Specifications

Function	GCS52DP	Dimensions	GCS52DP
<b>Computer Connections</b>		<b>Unit Dimensions</b>	
Direct	2	Height	3.375" (8.57cm)
<b>Port Selection</b>	Remote Pushbutton (6ft)	Depth	1.06" (2.69cm)
<b>Console Connectors</b>		Length	3.25" (8.27cm); KVM cables: 48" (121.92cm); Remote Switch: 72" (182.88cm)
Monitor	1 x DisplayPort	<b>Unit Package Dimensions</b>	
Keyboard	1 x USB Type A	Width	6.125" (15.56cm)
Mouse	1 x USB Type A	Height	8.875" (22.5cm)
Audio	1 x 3.5mm Mini Stereo Jack (Green)	Depth	2.18" (5.54cm)
Microphone	1 x 3.5mm Mini Stereo Jack (Pink)	<b>Master Carton</b>	
<b>CPU Connectors</b>		Width	15.25" (38.74cm)
Monitor	2 x DisplayPort	Height	6.75" (17.15cm)
Keyboard & Mouse	2 x USB 2.0 Type A	Depth	8" (20.3cm)
Audio	2 x 3.5mm Mini Stereo Jack	Master Carton Qty.	6
Microphone	2 x 3.5mm Mini Stereo Jack	<b>Weight</b>	
<b>Connectors</b>		Master Carton Wt.	7.55lb (3.44kg)
USB	1 x USB 2.0 Mouse Port	Unit Pack Wt.	0.90lb (0.41kg)
<b>LEDs</b>		Unit Wt.	0.90lb (0.41kg)
KVM	2 x White		
<b>Emulation</b>			
Keyboard	N/A		
Mouse	N/A		
<b>Video Resolution</b>			
	up to 4096 x 2160 @30Hz		
<b>Environment</b>			
Operation Temperature	0-50C		
Storage Temperature	-20-60C		
Humidity	0-80% RH, Non-condensing		
<b>Housing</b>			
Case	Plastic		
<b>Cable Length</b>			
	KVM cables: 48" (121.92cm); Remote Switch: 72" (182.88cm)		
<b>Power Consumption</b>			
	DC 5V, 6.5W		