

GW3DHDKIT

Wireless HDMI Digital Kit

Wireless HDMI transmitter and receiver kit up to 100ft* away



Wireless Video Through Walls, Doors and Ceilings - No Latency

Create a completely customized setup in minutes, and wirelessly transmit your favorite movies, sports and videos within the home, through walls, doors and ceilings.

IOGEAR's Wireless HD Digital Kit takes wireless home entertainment and 2 HDTV set-ups to the next level of connectivity, flexibility, convenience, and decor. It's capable of streaming uncompressed Full HD 1080p with 3D content support along with wireless 5.1 digital surround sound audio up to 100 feet* away, with no latency.

- Wireless HD audio/video streaming up to 100 feet* away
- 2 HDTV set-up - Share your HD content in a second location at the same time:
 - Living room HDTV can connect to transmitter's loop-through (local) port directly
 - Bedroom HDTV can receive content from wireless receiver
- Connect and transmit wireless video content from your Blu-ray / DVD player and DVR / Cable box turning your HDTV into a wireless TV
- Wireless 3D support
- Wireless HD in Full 1080p and 5.1 channel digital audio
- Video Resolutions: 480p, 720p, 1080i and 1080p (24/30/60fps)
- HDMI Inputs / Outputs :
 - Transmitter:
 - 2 x HDMI in
 - 1 x HDMI out (loop-through local port)
 - Receiver:
 - 1 x HDMI output
- Create a floating HDTV in almost any location such as bedroom, bathroom, family room, living room, den, loft, kitchen or patio
- Keep home theater electronic devices neatly out-of-sight
- Built-in IR allows the user control over their source devices that are hidden away in a different location
- No software or driver installation needed
- HDCP Compliant
- 128 bit AES encryption
- Based on WHDI™ Technology - Low latency <1ms

* Distances may vary depending on environment. Solid and non-porous materials such as steel, concrete, brick and glass (varies depending on coating and thickness) may cause shorter viewing distances or loss of signal.




How does it work?

Scenario 1

2 HDTV Set-up


- Connect your 3D or HD media sources to the wireless transmitter
- Connect first HDTV to the loop-through (local) port of the wireless transmitter
- Connect second HDTV to the wireless receiver

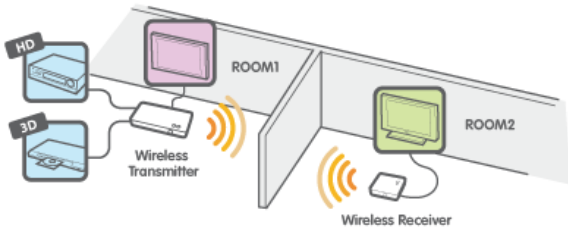

Scenario 2

1 Floating HDTV Set-up

- Connect your 3D or HD media sources to the wireless transmitter
- Connect the wireless receiver to your wall-mounted HDTV



Requirements

Display

- 1 HDMI input

Media Source

- 1 HDMI output

Package Contents

- 1 x Wireless HD Transmitter
- 1 x Wireless HD Receiver
- 1 x Remote Control
- 1 x IR Blaster Cable
- 2 x Power Adapter
- 2 x Battery (AAA)
- 1 x HDMI Cable
- 1 x Quick Start Guide
- 1 x Warranty / Registration Card

Specifications

Function	GW3DHDKIT	Dimensions	GW3DHDKIT
Connectors		Unit Dimensions	
Video Input	2 x HDMI	Height	TX: 1.25"; RX: 1.25"
Video Output	2 x HDMI (loop-through & remote)	Depth	TX: 7.25"; RX: 3.75"
Power	5V DC	Length	TX: 3.75"; RX: 3.75"
Audio Input	2 x HDMI	Unit Package Dimensions	
Audio Output	2 x HDMI (loop-through & remote)	Width	3.125"
Cable	2.5mm IR extender; 33KHz - 40KHz	Height	7.625"
Video Resolution	480p, 576p, 720p, 1080i, 1080p and 3D	Depth	10.625"
Video Streaming	<1ms Latency	Master Carton	
Frequency	5Ghz unlicensed band	Width	9.75"
Range	100ft. Distances may vary depending on environment	Height	8.25"
Antenna Type	High Performance Internal Antennas	Depth	11"
Power Switch	Pushbutton on the unit and remote control	Master Carton Qty.	3
LEDs		Weight	
Port ID	LED (Transmitter and Receiver)	Master Carton Wt.	7.4lb
Power On	LED (Transmitter and Receiver)	Unit Pack Wt.	2.25lb
Link	LED (Transmitter and Receiver)	Unit Wt.	0.75lb
Power			
Voltage	100-240V AC in, 5V DC out Power Adaptor		
Amps	Transmitter: 2A; Receiver: 1.5A		
Housing			
Case	Plastic		
Operating Temperature	32°-104°F		
Audio			
Audio Output	Up to 5.1 channels of surround sound		
Security	128 bit AES encryption		